Specifications

PFXE100CP KERNA COMMERCIAL SENSOR LAVATORY FAUCET

Product Features

· Touch-free deck-mounted electronic faucet
· Cold or premixed water
· Dual power (110V plug with 9V battery backup or 9V battery only) with battery box and transformer included (batteries not included)
· Chrome-plated brass body
· Activated by a concealed sensor in the spout
· Filter included
· Low battery indicator
· Adjustable sensor settings: Sensor range, security time, delay in, delay out, on-off, factory reset. Remote control required - sold separately. Factory settings will suffice for most applications and users. In the rare case that custom settings are desired, the optional remote control indicated below is required
· The faucet is automatically activated when users place their hands in the sensor range and shuts off when the user's hands are removed
· Vandal-resistant aerator
· Power supply options: 9V battery or 9V transformer
· Operating pressure: 0.5-8.0 bar/7.0-116.0 psi
· Water supply: Cold or premixed water
· Water saving options: 0.5 gpm (default), 0.35 gpm (OBPF508510067)
· Water temperature: 158°F maximum (70°C)
· Security time: Auto shutoff after 90 seconds, adjustable by remote control
· Sensor: Infrared convergence-type proximity sensor

Optional Parts


OBPF107270288	4" Deck plate
OBPF508510067	0.35 gpm aerator
PFXEREMOTE	Remote control

Codes and Certifications

· Certified to ASME A112.18.1 / CSA B125.1
· cUPC/IAPMO listed
· ADA compliant



PFXE100CP

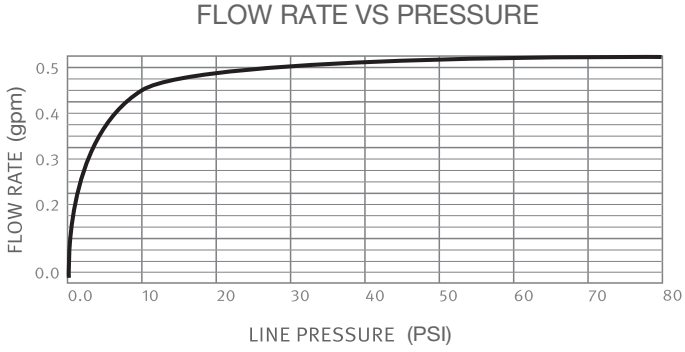


This graph applies to 0.5 gpm option only.

©2026 Ferguson Enterprises, LLC. FG 05/2026- A

Specifications

PFXE100CP KERNA COMMERCIAL SENSOR LAVATORY FAUCET

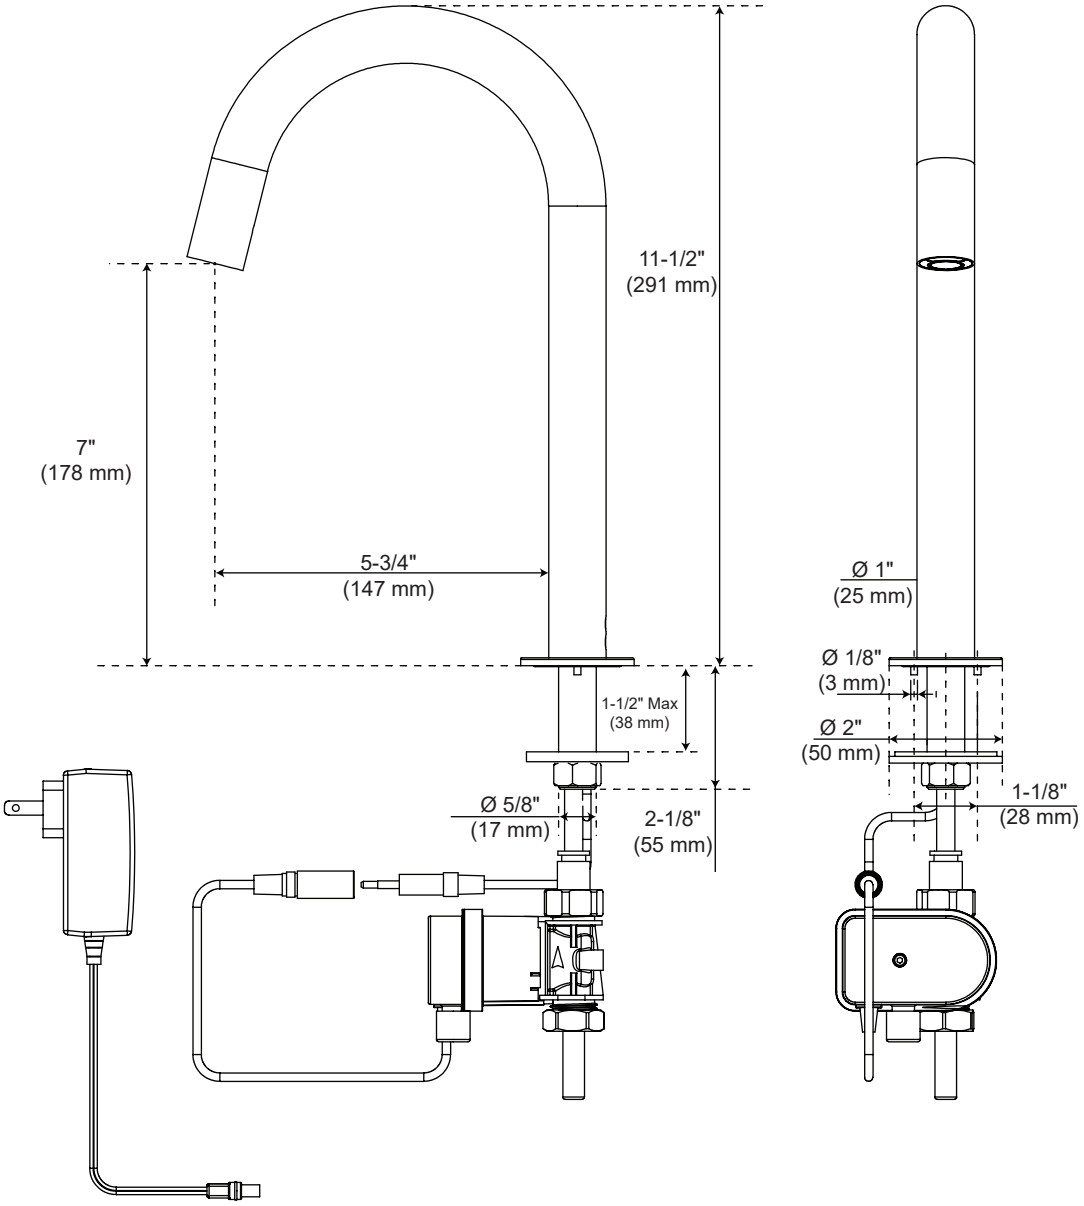

For detailed warranty information, visit **ferguson.com/proflo-faucet-warranty**.

©2026 Ferguson Enterprises, LLC. FG 05/2026- A