
REED Bear Hug™ PE Squeeze Tool System PES8BT#04328

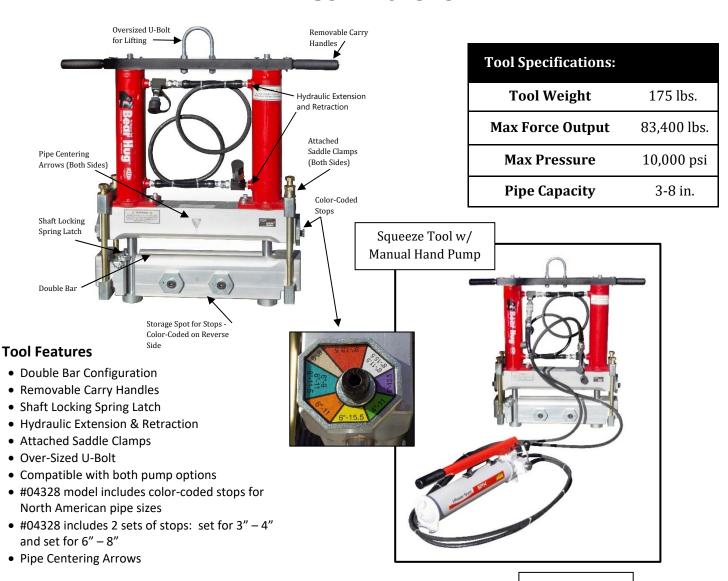

Accessories

2-stage Hand Pump: PESMPA #04329
Air-over-Hydraulic Pump: PESAPA #04330

• Filter-Regulator-Lubricator: PESFRLA #04331


Warning

- Cold temperatures can affect the pipe integrity during the squeeze. Squeeze and releases rates need to be slowed in temperatures below 40°F.
- Cold temperatures can affect the squeeze (below 40°F) and result in a less than desirable flow control. Give adequate time for the pipe to relax during the squeeze (5-15 min) and perform a double squeeze if necessary.





PIPE TOOLS & VISES SINCE 1896



Air Compressor Requirements for use with PESAPA: Regulate the air supply between 100-120 psi at the pump to obtain the rated 10,000 psi hydraulic pressure. Required air flow is 20 CFM.