Features
- Metal construction.
- Adjustable handshower sprayface rotates to select wide coverage or forceful utility spray.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Complete range of faucets, accessories and showering components to coordinate a full bathroom.

Material
- KOHLER finishes resist corrosion and tarnishing.

Required Products/Accessories
K-97339 Multiproduct Mounting-block

Recommended Products/Accessories
K-23723 Faucet cleaner

Codes/Standards
ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
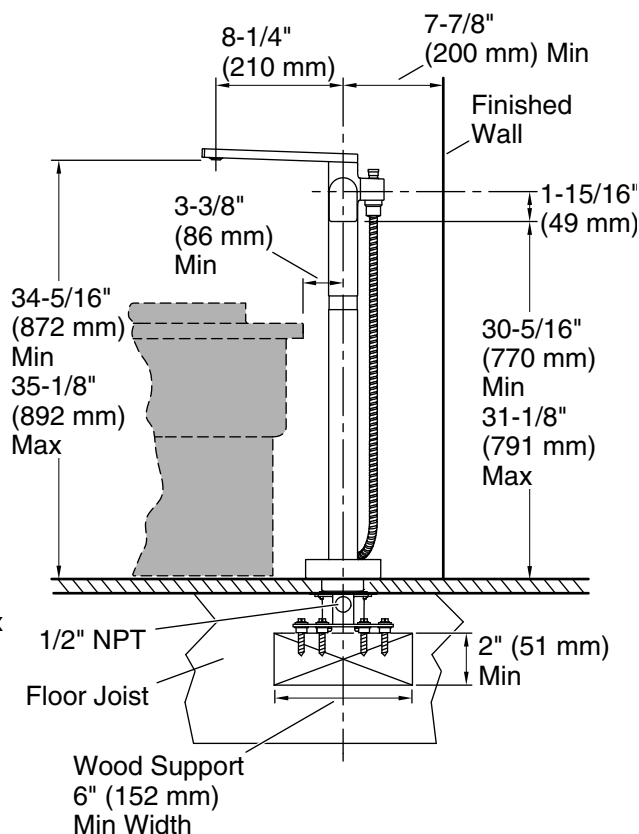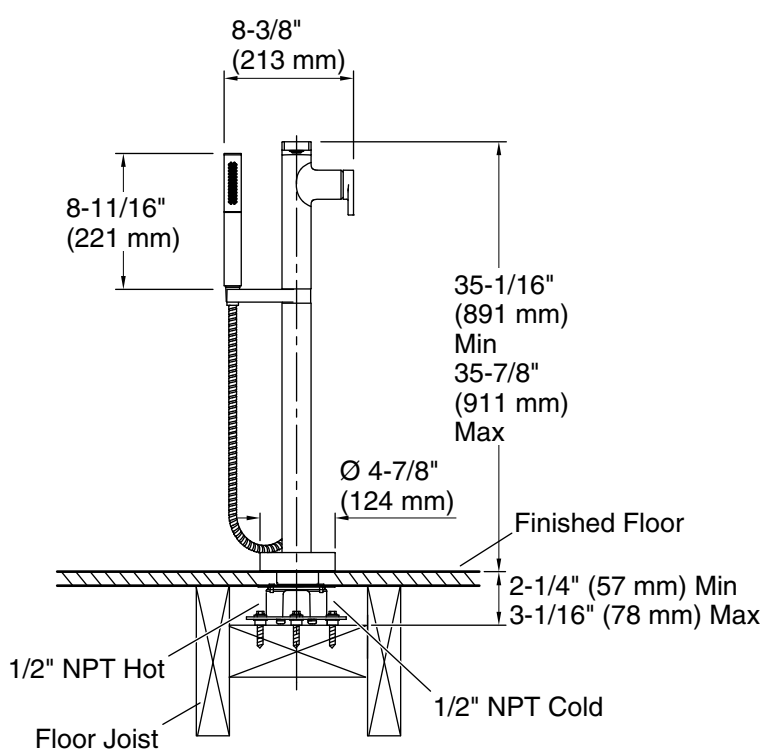California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
6-27-2022 19:36 - US/CA/MX

THE BOLD LOOK
OF **KOHLER**®

8-3/8"
(213 mm)

8-11/16"
(221 mm)

35-1/16"
(891 mm)
Min
35-7/8"
(911 mm)
Max

Ø 4-7/8"
(124 mm)

Finished Floor

2-1/4" (57 mm) Min
3-1/16" (78 mm) Max

1/2" NPT Hot

Floor Joist

1/2" NPT Cold

8-1/4"
(210 mm)

7-7/8"
(200 mm) Min

Finished Wall

3-3/8"
(86 mm)
Min

1-15/16"
(49 mm)

34-5/16"
(872 mm)
Min
35-1/8"
(892 mm)
Max

30-5/16"
(770 mm)
Min
31-1/8"
(791 mm)
Max

1/2" NPT

Floor Joist

Wood Support
6" (152 mm)
Min Width

2" (51 mm)
Min

Technical Information
All product dimensions are nominal.

Faucet:
Flow rate:	7.5 gal/min (28.4 l/min)
Pressure:	45 psi (3.1 bar)
Drain included:	No

Spout:
Spout reach:	8-1/4" (210 mm)

Handshower:
Rated maximum flow:	1.75 gal/min (6.6 l/min)
Pressure:	80 psi (5.5 bar)

Notes
For use with automatic compensating valves rated at 1.3 gal/min (4.9 l/min) or less.

Install this product according to the installation guide.

Adequate floor space is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires a 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, which are not included.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
6-27-2022 19:36 - US/CA/MX

THE BOLD LOOK OF KOHLER.