

Awaken® G110 Geometric

Multifunction Handshower K-72415

Features

- Handshower features contemporary design.
- Three spray functions and ADA-compliant nonpositive shutoff.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair.
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray.
- Thumb tab allows for a smooth transition between sprays.
- Spray nozzles cover full area of sprayhead.
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- 2.0 gpm (7.6 l/min) maximum flow rate.

Material

KOHLER finishes resist corrosion and tarnishing.

Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED[®] Green Building Rating System.

Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose

- or
- K-45981 72" ribbon hose
- or

K-45982 60" ribbon hose

Recommended Products/Accessories

K-23723 Faucet cleaner





OBC

Codes/Standards

ADA

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

CSA B651

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.


Color Code Description VHR

KOHLER, Faucets

Awaken® G110 Geometric

Multifunction Handshower K-72415

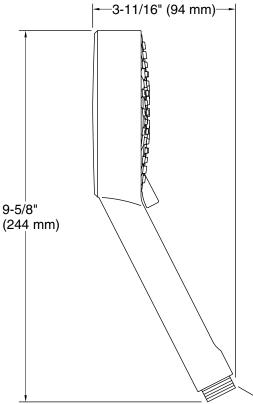

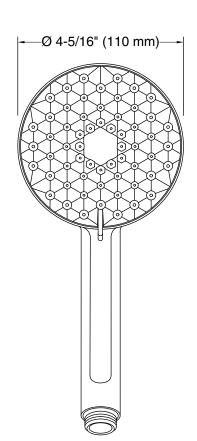

G1/2 Thread

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum 2 gal/min (7.6 l/min) flow:

Notes

Install this product according to the installation guide.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

