

Location:



3502BTRM
Tub/Shower System
Specification Submittal




Model Numbers	Feature Highlights
<ul style="list-style-type: none"> <input type="checkbox"/> 3502BTRM Tub/Shower System <input type="checkbox"/> 3502BTRMTC Tub/Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap 	<ul style="list-style-type: none"> • Tub/shower system powered by the Temptrol® Pressure Balancing valve • Features adjustable stop screw to limit handle turn • Diverter tub spout • 1 mode showerhead • Standard 2.0 gpm (7.6 L/min) flow restrictor • Components made from metal and nonmetallic materials plated in standard polished chrome finish
Modifications	Compliance
<ul style="list-style-type: none"> <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -Delete Suffix B Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon <input type="checkbox"/> -L1 Less showerhead <input type="checkbox"/> -L4 Less head, arm and flange <input type="checkbox"/> -L6 Less tub spout <input type="checkbox"/> -L7 Less handle <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> -MB Matte Black finish <input type="checkbox"/> -BBZ Brushed Bronze finish <p>Note: Append appropriate -suffix to model number.</p>	<p>ASME A112.18.1/CSA B125.1 WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</p> <div style="text-align: right;">   <small>Certified by CSA Group</small> </div>
	Warranty
	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> <div style="text-align: right;">  </div>

Architectural/Engineering Specification

Symmons Dia Tub and Shower System _____ Includes Tub and shower system powered by the Temptrol® Pressure Balancing valve, Features adjustable stop screw to limit handle turn, diverter tub spout, 1 mode showerhead and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WasterSense compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "Delete Suffix B - Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon", "TRM - Trim only, valve not included", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "BBZ - Brushed Bronze finish".

Dimensions

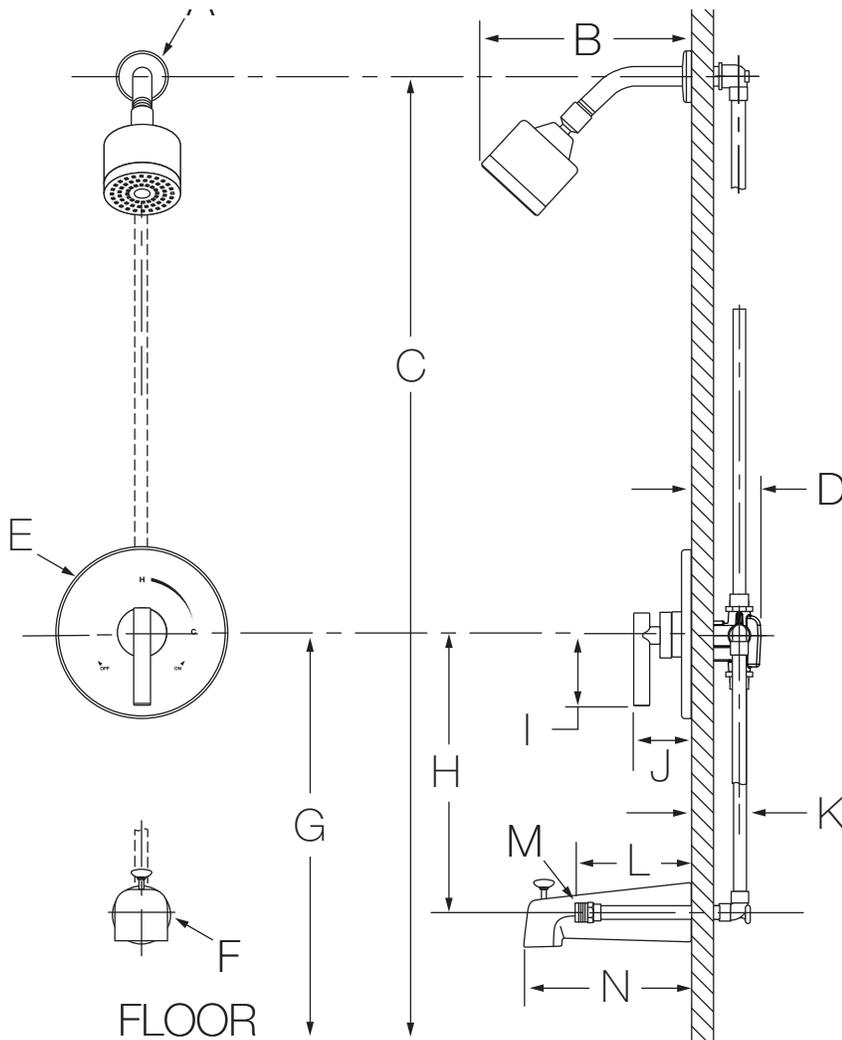

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/4", 171 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 7-1/2", 191 mm
F	Ø 2-1/2", 64 mm
G	Ref. 32", 813 mm
H	Ref. 12", 305 mm
I	3", 76 mm
J	2-7/8", 73 mm
K	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
L	5-1/2", 140 mm
M	Male 1/2-14 NPT fitting must protrude 5-1/2" (140 mm) from finished wall
N	7", 178 mm

Notes:

- 1) All dimensions measured from nominal rough-in (see K as reference).
- 2) Dimensions are subject to change without notice.