

CASSADORE

PFWSC2950 SINGLE-HOLE BATHROOM FAUCET



Product Features

- Flow rate: 1.2 gpm (4.54 L/min) at 60 psi
- Metal lever handle
- Ceramic disc cartridges
- 50/50 metal pop-up drain assembly
- Single-hole installation
- With 3/8" compression x 21-5/8" flexible connectors

Optional Parts

1.0 GPM aerator

Neoperl 42.3058.033

Deck plate

OBPF11131102610*

Drain lift rod extension



PF351NA



Codes and Certifications



- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/IAPMO listed
- Handle ADA compliant
- EPA WaterSense approved
- NSF/ANSI/CAN 61: Q ≤1

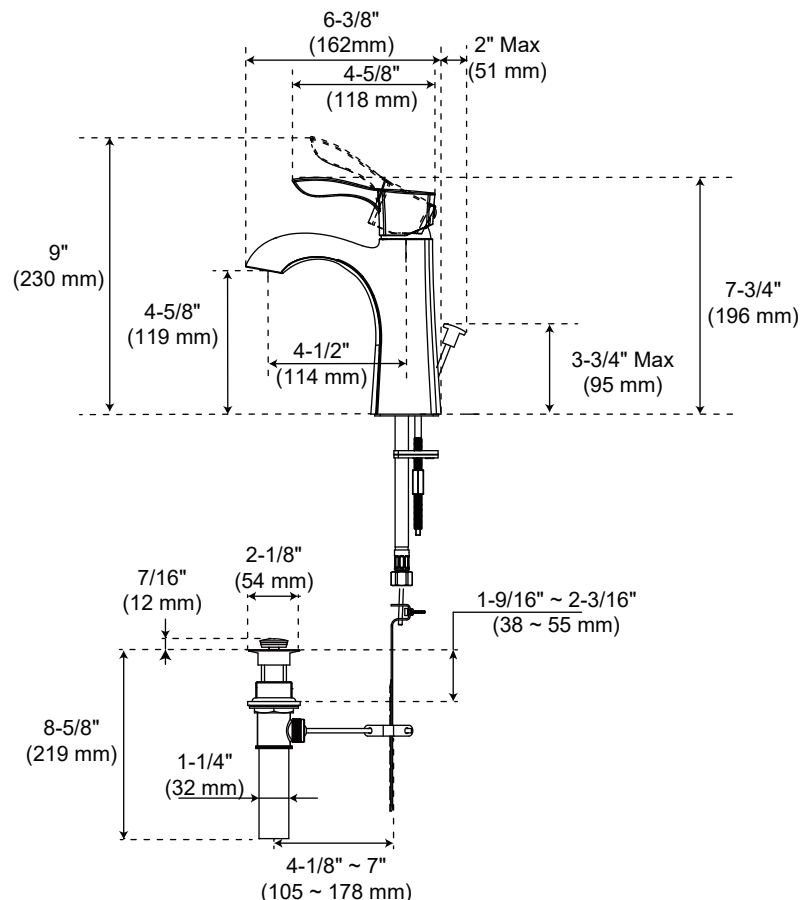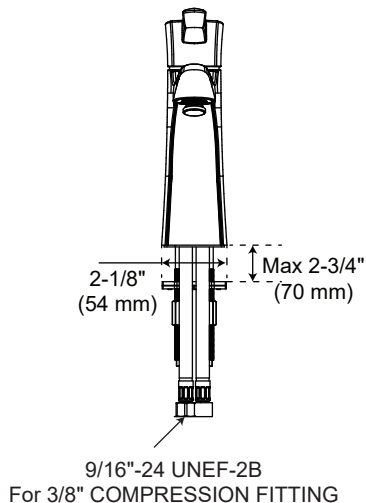

PFWSC2950

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.