

## Specifications

# PFSH322 SHOWERHEAD



### Product Features

- Six-function showerhead: spray, massage, spray+massage, aerated, spray+aerated, trickle
- Brass and ABS construction
- Maximum flow rate 1.8 gpm (6.8 L/min) at 80 psi
- Easy-to-clean nozzles
- 1/2" NPT connection



### Codes and Certifications



- Certified to ASME A112.18.1 / CSA B125.1
- Meet ADA compliant
- WaterSense Certified



**PFSH322CP**

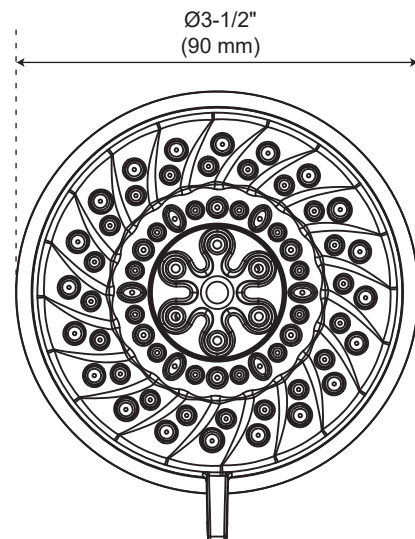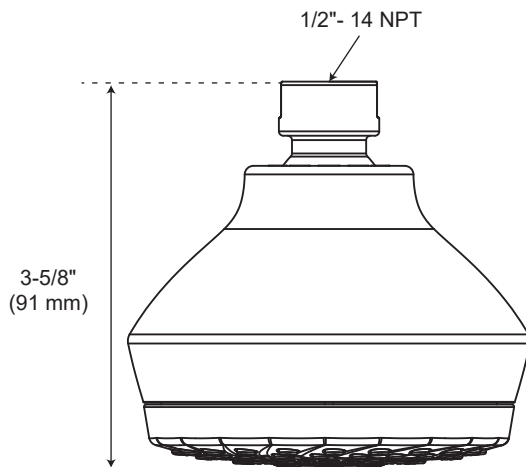

For detailed warranty information, visit [ferguson.com/proflo-faucet-warranty](https://ferguson.com/proflo-faucet-warranty).