

### Features


- Reduces lead, mercury, PFOA/PFOS, pharmaceuticals, VOC and more.
- Filter head automatically turns off water supply when cartridge is removed.
- Replacing the carbon block VOC filter every 6 months keeps filtration system performing effectively.
- For cold water use only.

### Material

- High-impact plastic construction.

### Installation

- Under-sink.
- Quarter-turn twist cartridge for easy installation and replacement.

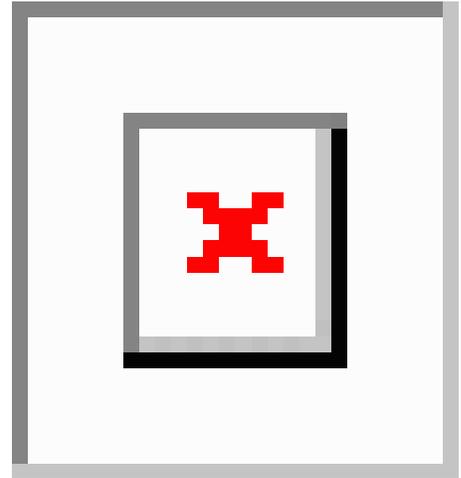


### Codes/Standards

CSA B483.1  
NSF/ANSI 42  
NSF/ANSI 53  
NSF/ANSI 401  
NSF Protocol P231

### KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

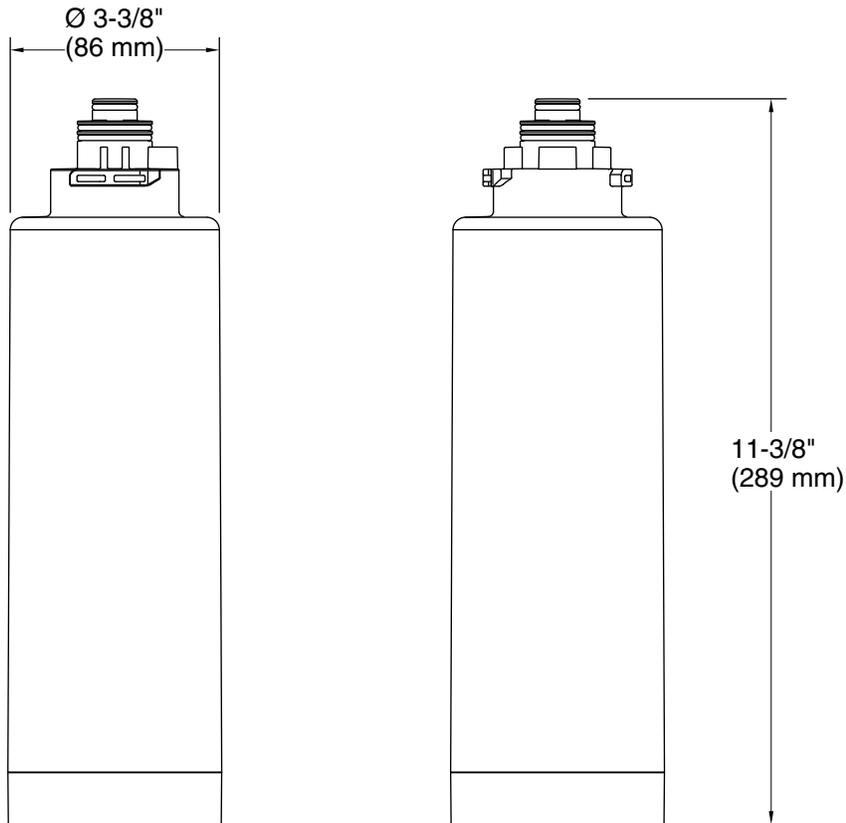

**Technical Information**

All product dimensions are nominal.

**Notes**

Install this product according to the installation instructions.

To prevent the risk of property damage, protect from freezing.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:  
Water Pressure: 40-120 psi (276-827 kPa) Water Temperature: 33-100°F (0.5-37.8°C) Capacity: 792 gal (3,000 L)