

# Dianna 5 Light Linear Pendant

6692605 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

## GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

This product may be dimmed with a standard incandescent dimmer.

This instruction shows a typical installation.


VISUAL COMFORT & Co.

7400 Linder Ave, Skokie, IL 160077

800.969.3347

[www.visualcomfort.com](http://www.visualcomfort.com)


©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

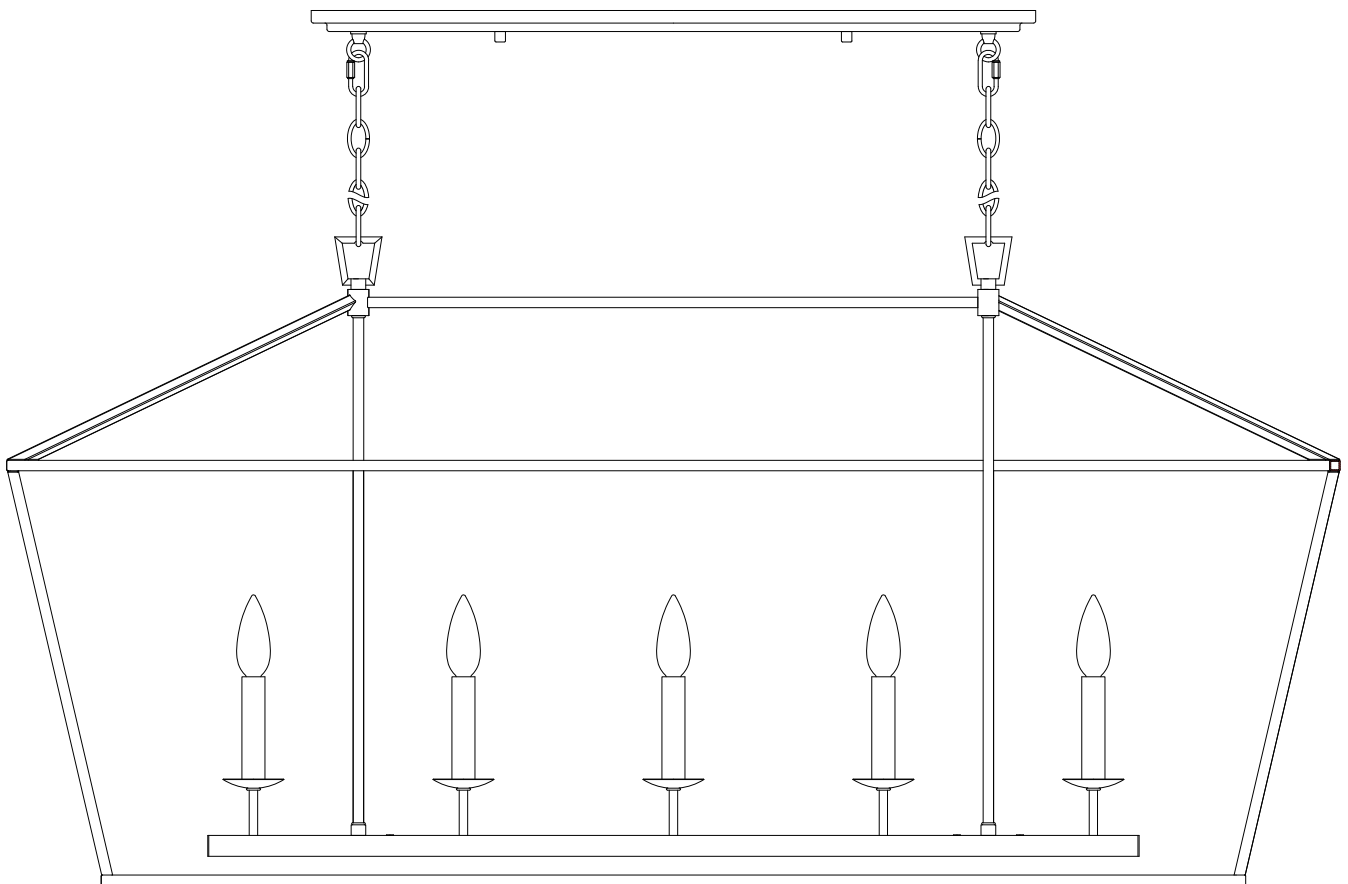

**SAVE THESE INSTRUCTIONS!**

# Install the Fixture

IA

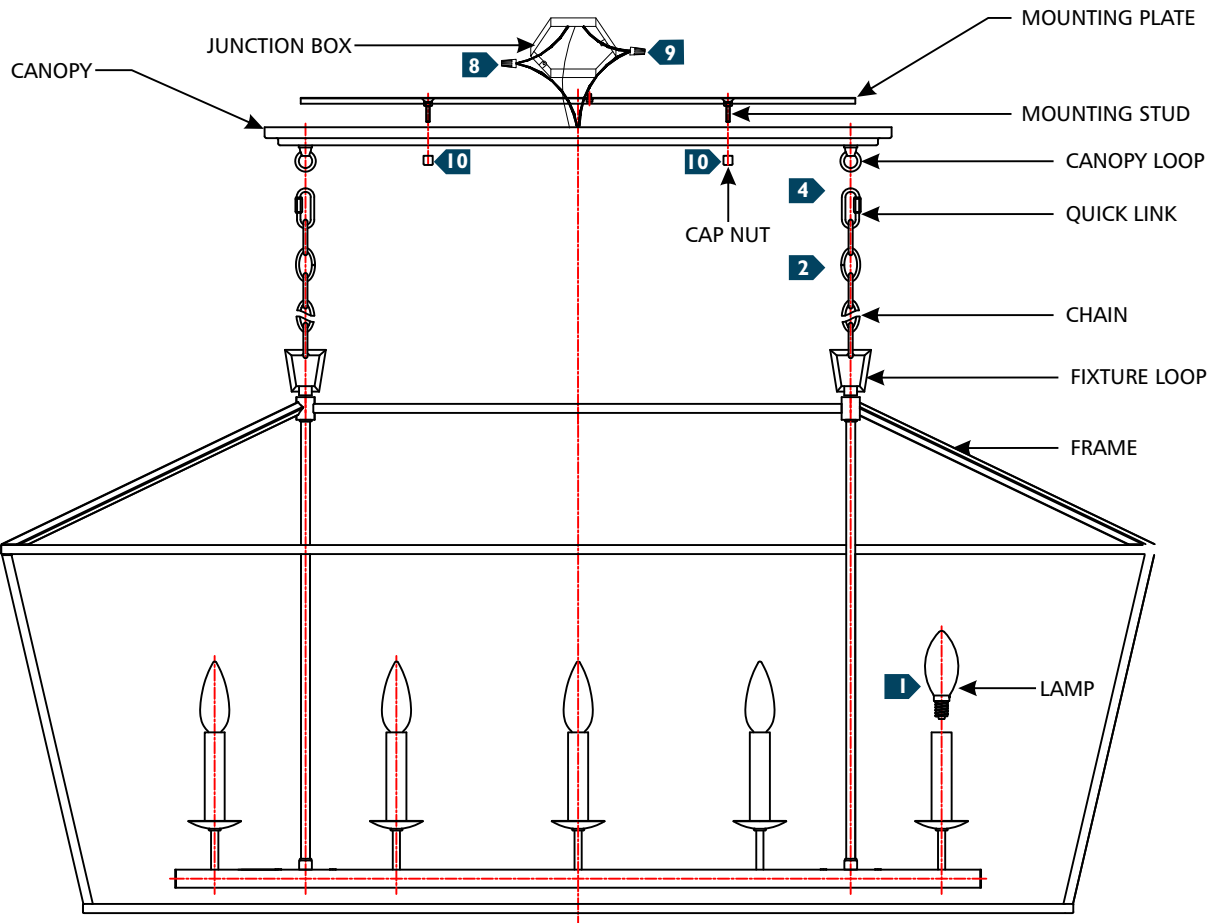

- 1** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 2** Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the top.
- 3** Install the quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 4** Weave the cord through the fixture loop chain, canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 5** Align and secure the mounting plate to the junction box.
- 6** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the cap nuts tightly into the mounting studs.