



NIBCO® 585HP Lead-Free Bronze Ball Valves

Features: Silicon Performance Bronze® Alloy • Laser-Welded Cast Body • Triple-Sealed Stem • Reversible Handle • Easily Adjustable Packing Nut • Blowout-Proof Stem • Stainless Trim

Approvals: MSS-SP110/145 • IAPMO/ANSI Z1157 • ASME A112.4.14/CSA B125.14 • NSF/ANSI/CAN 61/372-8 Commercial Hot 180° F • ICC-ES PMG

Size range: 1/4" - 4"



Pressure / temperature ratings:

- T-585HP (1/4"-2"): 1,000 psi non-shock cold working pressure
- T-585HP (2 1/2"-4"): 600 psi non-shock cold working pressure
- S-585HP (1/2"-1"): 1,000 psi non-shock cold working pressure
- S-585HP (1 1/4"-2"): 850 psi non-shock cold working pressure
- S-585HP (2 1/2"): 600 psi non-shock cold working pressure
- 150 saturated steam working pressure*

Lead-free markings: Double oval in body casting, white handle and blue hang tag

MATERIAL LIST

PART	SPECIFICATION
1. Handle Nut	Carbon Steel, GEOMET® Coated
2. Handle Stop	ASTM A276 S31600 Stainless Steel
3. Stem	ASTM A276 S31600 Stainless Steel
4. Packing	PTFE
5. Packing Nut	ASTM B16 C36000 Brass
6. Stem O-ring (2)	Qmonix® EPDM
7. Body	ASTM B584 C87500 DZR Lead-free Silicon Bronze Casting
8. Seats (2)	Reinforced PTFE
9. Ball	ASTM A276 S31600 or A351 CF8M Stainless Steel
10. Body End Piece	ASTM B584 C87500 DZR Lead-free Silicon Bronze Casting
11. Handle	Carbon Steel, GEOMET® Coated, Plastisol Grip

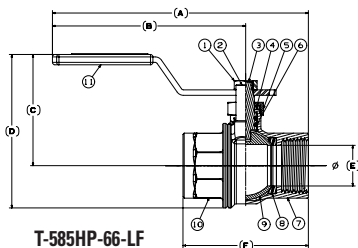

DIMENSIONS - WEIGHTS

Size	S-585HP-66-LF		T-585HP-66-LF						S-585HP-66-LF		T-585HP-66-LF						S-585HP-66-LF		T-585HP-66-LF		S-585HP-66-LF		Weights			
	A		A		B		C		D		D		E		F		F		G							
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	lbs.	kg	lbs.	kg		
¼"	-	-	4.98	-	4.04	102	1.99	50	-	-	2.65	67	0.39	10	-	-	1.87	47	-	-	-	-	0.64	0.29		
.39"	-	-	4.98	-	4.04	102	1.99	50	-	-	3.17	81	0.39	10	-	-	1.87	47	-	-	-	-	1.16	0.53		
½"	5.02	128	5.11	130	4.04	103	2.03	52	2.56	65	2.65	67	0.50	13	1.92	49	2.14	54	0.94	24	0.50	0.23	0.64	0.29		
¾"	5.65	143	5.52	140	4.18	106	2.31	59	3.08	78	3.17	81	0.75	19	2.93	74	2.66	68	1.43	36	0.91	0.41	1.16	0.53		
1"	6.55	166	6.30	160	4.75	121	2.74	70	3.70	94	3.78	96	1.00	25	3.58	91	3.09	78	1.76	45	1.23	0.56	1.53	0.69		
1¼"	7.04	179	6.75	171	5.06	129	2.92	74	4.03	102	4.03	102	1.25	32	3.96	101	3.38	86	2.02	51	1.92	0.87	2.25	1.02		
1½"	9.05	230	8.65	220	6.75	171	3.22	82	4.56	116	4.56	116	1.50	38	4.61	117	3.79	96	2.43	62	2.84	1.29	3.19	1.45		
2"	9.93	252	9.29	236	7.12	181	3.68	93	5.40	137	5.45	138	2.00	51	5.62	143	4.34	110	2.94	75	3.91	1.77	4.00	1.81		
2.5"	15.64	397	15.12	384	12.06	306	4.41	112	6.62	168	6.62	168	2.50	633	7.15	181	6.12	155	4.21	107	12.75	5.78	13.60	6.17		
3"	-	-	15.30	388	12.06	306	4.71	119	-	-	7.26	184	3.00	76.2	-	-	6.48	164	-	-	-	-	14.08	6.39		
4"	-	-	16.01	406	12.06	306	5.52	140	-	-	8.88	225	4.00	101	-	-	7.89	200	-	-	-	-	23.24	10.54		

*Maximum working pressure/temperature ratings for solder-end valves per ASME B16.18 Table A-1. Published ratings require use of 95-5 tin-antimony solder when assembling joints.

***NIBCO recommends SS Ball for Hot Water and Steam applications.**

GEOMET® is a registered trademark of NOF Metal Coatings, Inc, and QMONIX® is a trademark of Quadion LLC.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

LEAD-FREE: Weighted average lead content $\leq 0.25\%$

LEAD-FREE: Weighted average lead content $\leq 0.25\%$

NIBCO INC. WORLD HEADQUARTERS • 1516 MIDDLEBURY ST. • ELKHART, IN 46516-4740 • USA • PH: 1.800.234.0227
TECH SERVICES PH: 1.888.446.4226 • FAX: 1.888.336.4226 • INTERNATIONAL OFFICE PH: +1.574.295.3327 • FAX: +1.574.295.3455
www.nibco.com

United States Patent
No. 10,234,043 &
United States Patent
No. 11,131,403



IAPMO/ANSI Z1157
ASME A112.4.14
CSA B125.14



NSF/ANSI/CAN 61 & 372



Complies to UPC



Handle Options:

- NIB-Seal® (1/4"-2")
- Locking Lever
- Stainless Steel
- Extended Lever w/
Memory Stop