
HOTPOINT

HDA2100H – Hotpoint Built-In Dishwasher


Dishwasher Dimensions (in inches)




Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	8.6
Calrod® heater watts max	500

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.






When using GPF325 1/4" custom dishwasher door and access panel kit. When using GPF375 3/4" custom dishwasher door and access panel kit.

Kit	Α	В	C	Panel Thickness
GPF325	18-7/8"	23-9/16"	3-11/16"	1/4"
GPF375	18-15/16"	23-5/8"*	4-1/4" to 3-3/4"**	3/4"

- * Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel
- ** Adjustment required to match adjacent cabinet fronts due to leveling leg adjustment, 4" nominal



Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes. Dishwasher includes drain hose and leveling legs.


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.





HOTPOINT

HDA2100H – Hotpoint Built-In Dishwasher

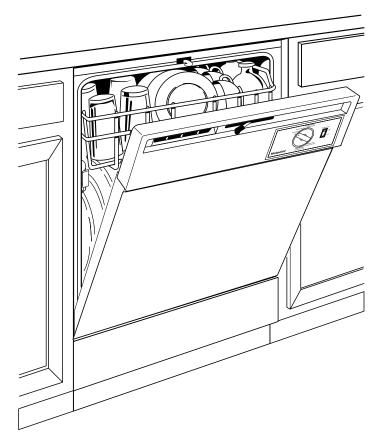

Features and Benefits

- Piranha[™] hard food disposer Grinds food into small particles that are washed away
- Hot Start option Provides optimal water temperature for dependable performance
- 64 dBA motor runs quietly to keep kitchen peaceful
- Water saver cycle Great for quickly washing loads of everyday dishes or a quick load of glasses
- Heavy wash cycle great for heavily soiled dishes and cookware
- 5 cycles/2 options Allows you to select the combination that best cleans your dishes
- Up to 12-place setting capacity racking Provides flexibility to wash a variety of dishes at once
- Model HDA2100HWW White on white
- Model HDA2100HBB Black on black
- Model HDA2100HCC Bisque on bisque