
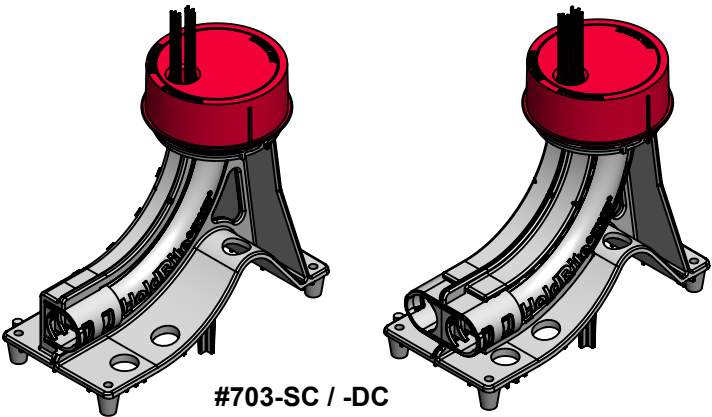


HoldRite® 703


The HoldRite 703 Series provides a protective recessed cavity in the upper portion of the concrete floor, providing a space for the protection of either one or two 1/2" PEX tubes (with 3/4" protective corrugated tubing) or 3/4" electrical conduits. Includes removable cover plate with "locator whiskers".

Product Information

- Material: Reinforced Polypropylene
- Fluid Temperature Range: 32°F to 200°F
- Installation Temperature Range: -10°F to 120°F
- Load Rating: 25 lbs.
- Patent: Pending
- UPC / IPC / IAPMO listed

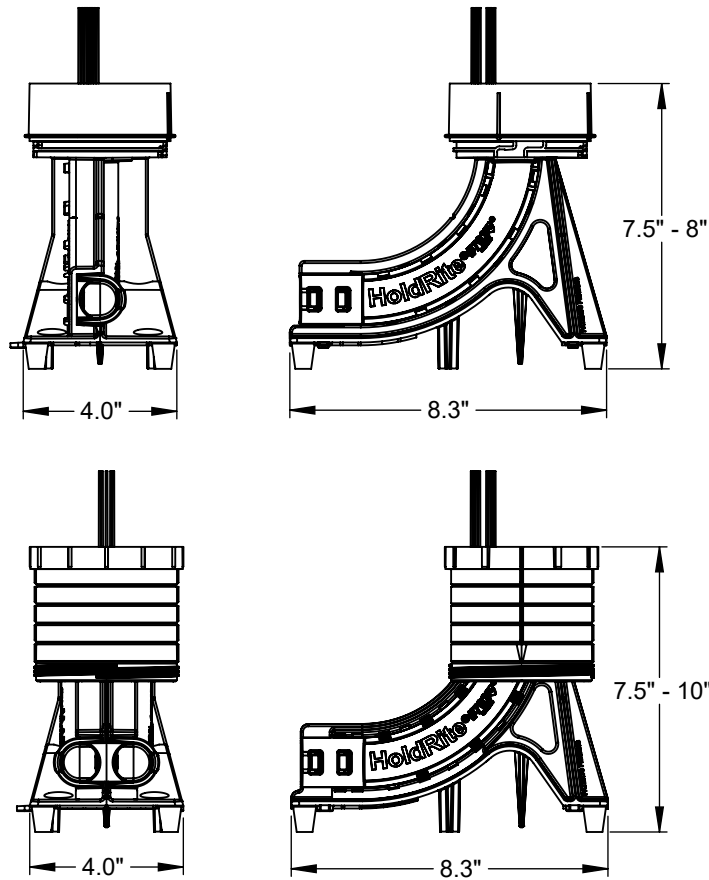



#703-SC / -DC

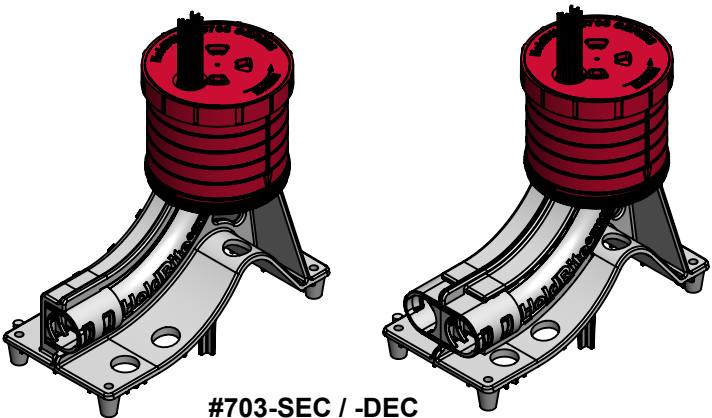


#703-SEC / -DEC

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	




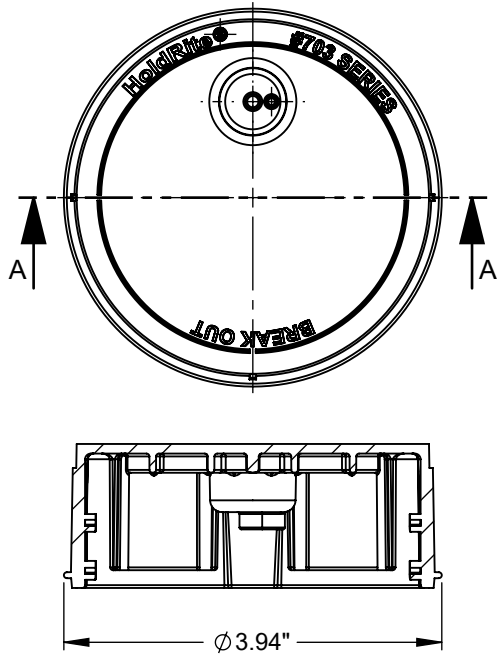

#703 Adjustable Cap

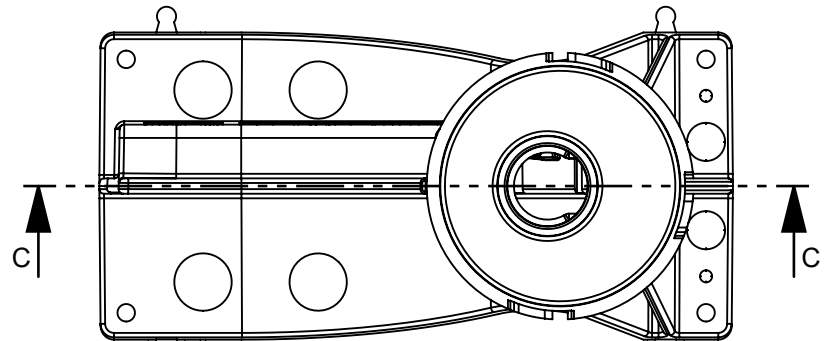

#703 Single & Double Base

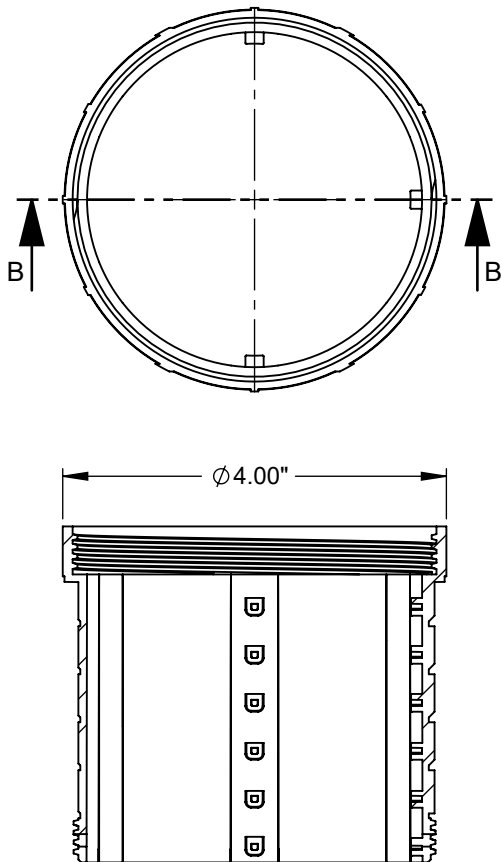

#703 Extension