

Job Name:

System Reference:

Date:

208/230V OUTDOOR VRF HEAT PUMP SYSTEM**ACCESSORIES**

Header Kit.....for details see Pipe Accessories Submittal

Joint Kit.....for details see Pipe Accessories Submittal

Low Ambient Kit.....for details see Low Ambient Kit Submittal

Snow/Hail Guards Kit.....for details see Snow/Hail Guards Kit Submittal

Specifications			System
Unit Type			PUHY-HP72TNU-A
Cooling Capacity (Nominal)		BTU/H	72,000
Heating Capacity (Nominal)		BTU/H	80,000
Guaranteed Operating Range	Cooling	°F [°C]	23~126 [-5.0~52.0]
	Heating	°F [°C]	-22~60 [-30.0~15.5]
Extended Operating Range	Heating	°F [°C]	-27.4~60 [-33.0~15.5]
External Dimensions (H x W x D)		In. [mm]	71-5/8 x 49-1/4 x 29-3/8 [1,818 x 1,250 x 745]
Net Weight		Lbs. [kg]	609 [276]
External Finish			Pre-coated galvanized steel sheet [MUNSELL 3Y 7.8/1.1 or similar]
Electrical Power Requirements	Voltage, Phase, Hertz, Power Tolerance		208/230V, 3-phase, 60 Hz, ±10%
Minimum Circuit Ampacity		A	38.0/35.0
Maximum Overcurrent Protection		A	60/50
Recommended Fuse Size		A	55/55
Recommended Minimum Wire Size		AWG [mm]	6/6 [13.3/13.3]
SCCR		kA	5
Refrigerant Piping Diameter	Liquid (High Pressure)	In. [mm]	3/8 [9.52] Brazed
	Gas (Low Pressure)	In. [mm]	7/8 [22.2] Brazed
Max. Total Refrigerant Line Length		Ft.	3,280
Max. Refrigerant Line Length (Between ODU & IDU)		Ft.	541
Max. Control Wiring Length		Ft.	1,640
Indoor Unit Connectable	Total Capacity		50.0~130.0% of outdoor unit capacity
	Model/Quantity		P04~P72/1.0~18.0
Sound Pressure Levels		dB(A)	55.0/57.0
Sound Power Levels		dB(A)	74.0/76.0
FAN ⁴	Type x Quantity		Propeller fan x 2
	Fan Motor Output	kW	0.46+0.46
	Airflow Rate	CFM	6,700
	External Static Pressure	In. WG	Selectable; 0.00, 0.12, 0.24, 0.32, In. WG; factory set to 0 In. WG
Compressor Operating Range			15.0% to 100.0%
Compressor	Type x Quantity		Inverter scroll hermetic compressor x 1
Refrigerant	Type x Original Charge		R410A x 21 lbs + 10.0 oz [9.8 kg]
Protection Devices	High Pressure Protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter Circuit (Comp./Fan)		Over-current protection
AHRI Ratings (Ducted/Non-ducted)	EER		11.9/13.1
	IEER		21.1/27.2
	COP		4.03/4.39

NOTES:

Nominal cooling conditions (Test conditions are based on AHRI 1230)
 Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
 Nominal heating conditions (Test conditions are based on AHRI 1230)
 Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)


¹Harsh weather environments may demand performance enhancing equipment. Ask your Mitsubishi Electric representative for more details about your region

²For details on extended cooling operation range down to -10° F DB, see Low Ambient Kit Submittal

³When applying product below -4°F, consult your design engineer for cold climate application best practices, including the use of a backup source for heating

⁴Unit will continue to operate in extended operating range, but capacity is not guaranteed

Unit: mm (in.)

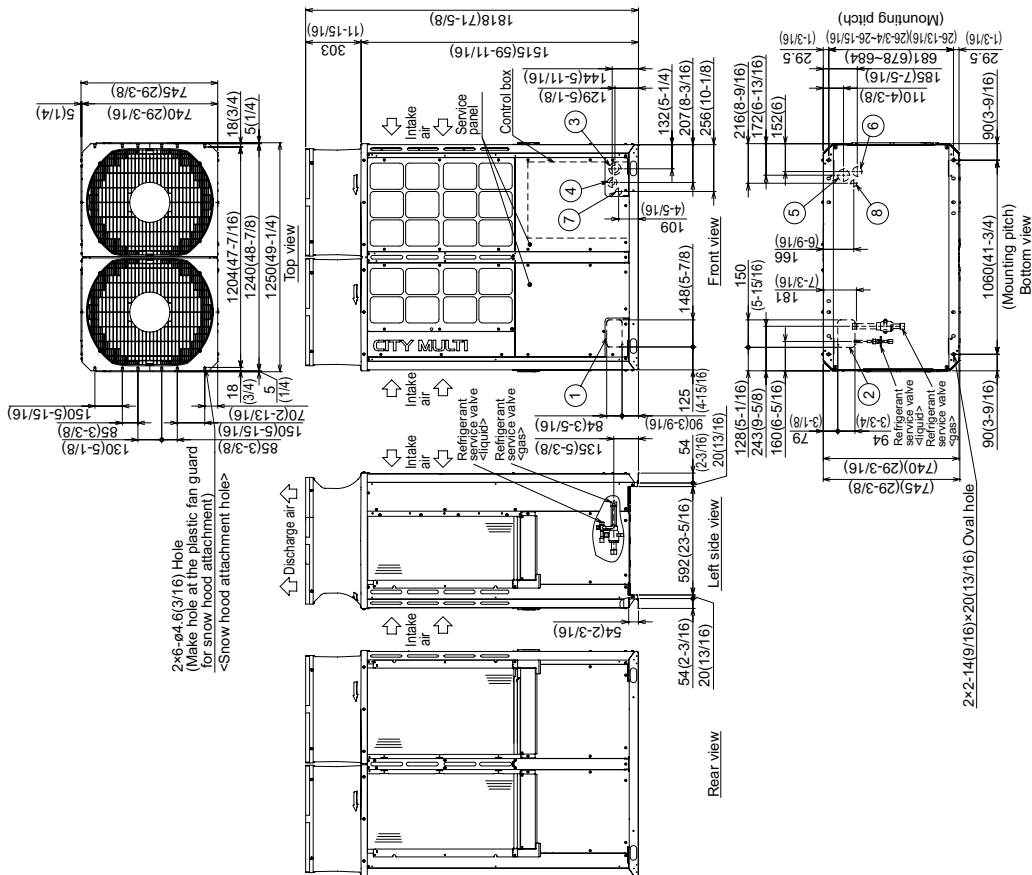

Note 1. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications

Model		Refrigerant pipe		Diameter		Service valve	
		Liquid	Gas	Liquid	Gas		
HP72		ø 5/32 (3/8) Braze ¹⁾					
HP96		ø 5/32 (3/8) Braze ¹⁾	ø 2.2 (7/8) Braze ¹⁾				
			(ø 2.7 (1/2) Braze ¹⁾ 3				
HP120		ø 5/32 (3/8) Braze ¹⁾	ø 2.5 (58-11/8) Braze ¹⁾			ø 1.2 (7/16)	ø 28.5 (8-11/8)
		(ø 2.7 (1/2) Braze ¹⁾ 2, 4					

*1 Connect the refrigerant pipe to the service valve

according to the Installation Manual.

*2 Indicates dimensions and connection specifications in the case the unit is used in combination with other outdoor units.

*3 Furthest piping length (OU from IU) $\geq 90\text{m}$

*4 Furthest piping length (OU from IU) $\geq 40\text{m}$

NO.	Usage	Specifications
①	For through hole	148(5.75) × 84(3.31) hole
②	For pipes	Bottom through hole 150(5.91) × 94(3.74) knockout hole
③		Front through hole 162(2.12) or 84(5.1) × 39(1.54) knockout hole
④		Front through hole 86(2.12) or 84(5.1) × 82(2.78) knockout hole
⑤	For wires	Bottom through hole 85(2.91) × 16(0.63) knockout hole
⑥		Bottom through hole 85(2.91) × 16(0.63) knockout hole
⑦	For through hole	85(4.13) × 39(1.54) knockout hole
⑧	For transmission cables	85(4.13) × 39(1.54) knockout hole
⑨	For cables	85(4.13) × 39(1.54) knockout hole

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

