Mach® Manual | K-80UM00G20

Urinal flushometer, 0.5 gpf

Features

- 0.5 gpf (1.9 lpf)
- 125-micron filter protects internal components
- High back pressure vacuum breaker
- Locking stop cap and nonhold open design provide protection against vandalism
- No external flush volume adjustment ensures water conservation
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Patented piston technology for superior flush volume accuracy



Sustainability

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 5:57 - US-CA

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA | CSA B651 | OBC

ASSE 1037/ASME A112.1037/CSA B125.37
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type:	Lever

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	25 psi (172.4 kPa)
Minimum Flow Rate:	10 gpm (37.9 l/min)

Material

- Brass construction with durable Polished Chrome finish

Recommended Products/Accessories

1421939 Extension Kit

1509698 Assembly, Fv Pressure Gauge, 1/8"

K-23723 Faucet cleaner

Technology

- Double seal handle design for long life without leaks
- Nonhold open piston technology for accurate activation

Warranty


See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 5:57 - US-CA

THE BOLD LOOK OF KOHLER®

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

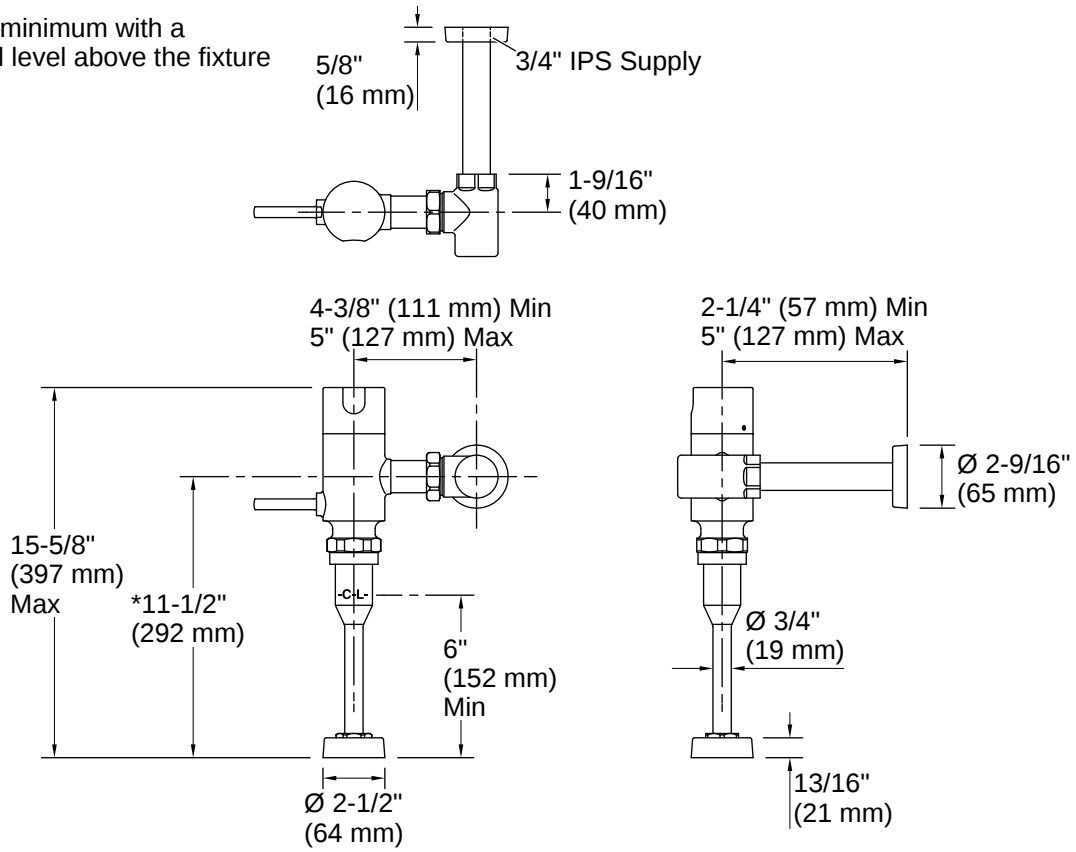

Installation

- For urinal installations with 3/4” top spud coupling connection
- Can be installed for left- or right-handed users

Installation Notes

Install this product according to the installation instructions.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.
ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 5:57 - US-CA

THE BOLD LOOK OF KOHLER.