

TOTO®

CWT427227CMFG#MS

RP Compact Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

FEATURES

RP Compact Bowl

- DYNAMAX TORNADO FLUSH® system, high efficiency (1.28GPF/0.9GPF)
- CEFIONTECT® ceramic glaze - prevents debris, mold from sticking to ceramic surfaces
- Universal Height
- D-shape front bowl

SoftClose® Seat

- D-shape closed front toilet seat and cover with SoftClose hinge system
- Mounting hardware included
- Made from urea resin
- Quick release hinges for easier cleaning

DuoFit® In-Wall Tank

- High-efficiency dual flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF)
Avg. flush 1.03 GPF
- Adjustable 15" -19" mounting height
- Saves up to 10" of floor space compared to standard floor-mounted toilet
- Compact size is 490mm from wall to front of bowl
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper supply line

Push Plate

- Basic Round Push Plate - YT930#WH or YT930#MS

KIT COMPONENTS

- **CWT427227CMFG#MS**
 - **CT427CFG#01**
RP Compact Wall-Hung Toilet
 - **WT172M**
In-Wall Tank System (Copper Pipe)
 - **SS227#01**
Slim D-Shape SoftClose Seat
 - **YT930#MS**
Basic Round Push Plate - Matte Silver
- **CWT427227CMFG#WH**
Same as CWT427227CMFG#MS except:
 - **YT930#WH**
Basic Round Push Plate - White Matte

Available Options

- YT920#WH
Basic Square Push Plate - White Matte
- YT920#MS
Basic Square Push Plate - Matte Silver
- YT970#SS
Wall Round Push Plate - Brushed Stainless Steel



**DYNAMAX
TORNADO FLUSH**



Skirted Design



CEFIONTECT



Universal Height

COLORS/FINISHES

- Standard
#01 Cotton

CODES/STANDARDS

- Meets and exceeds:
 - Bowl: ASME A112.19.2/CSA B45.1, ASME A112.19.14
 - Carrier System: ASME A112.6.2
 - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC), ANSI Z124.5, EPA WaterSense, State of Massachusetts, City of Los Angeles and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



CWT427227CMFG#MS

RP Compact Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

PRODUCT SPECIFICATIONS

	CT427CFG	SS227	WT172M
Water Use	1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)		1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®		Dual-Max®
Min. Water Pressure	8 psi (static)		8 psi (static)
Water Surface	5-5/8" X 4-1/8"		
Trap Diameter	2-1/8"		
Installation Height	15" to 19"		15" to 19"
Trap Seal	2-1/8"		
Warranty	One Year Limited Warranty	One Year Limited Warranty	One Year Limited Warranty
Material	Vitreous China	Urea Resin	Various
Shipping Weight	64 lbs	8 lbs	38 lbs
Shipping Dimensions	21-3/8" H x 14-3/4" W x 16-1/8" L	20-1/2" x 19-1/4" x 3-1/4"	48" L x 26-1/2" W x 6" H

CT427CFG

This universal height, D-shaped front bowl, high efficiency DYNAMAX TORNADO FLUSH system toilet shall be 1.28 GPF & 0.9 GPF. Toilet shall have CEFIONTECT ceramic glaze. Toilet requires in-wall tank system and wall-mounted push-plate type trip lever. Toilet shall be TOTO Model CT427CFG#01.

SS227


Seat shall be made from urea resin for both the seat and seat cover. The seat installation is top mount installation with adjustable hinge plates and stainless steel hinge caps.

WT172M

This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28 GPF & 0.9 GPF. Requires TOTO toilet model CT427CFG and wall-mounted push plate. In-Wall tank system shall be TOTO Model WT172M.

INSTALLATION NOTES

- Adequate structural bracing is required

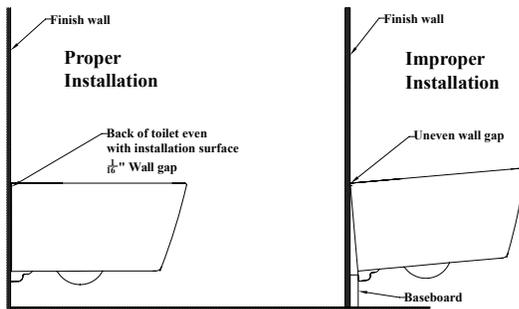


YT930


Dual button push plate required. Basic Round comes in White Matte or Matte Silver. Optional Brushed Stainless Steel is available.

PRODUCT DIMENSIONS

CT427CFG

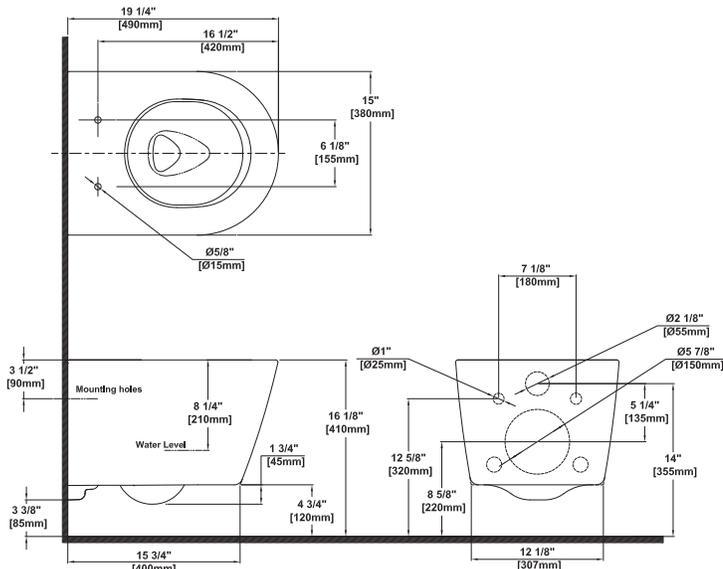

SS227

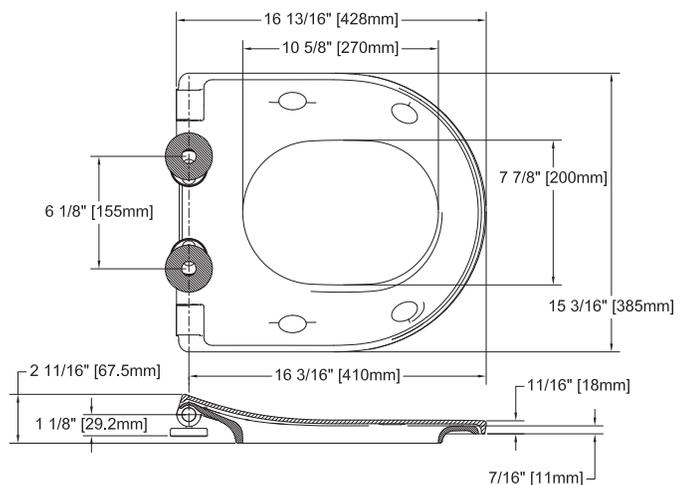


CWT427227CMFG#MS


RP Compact Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

PRODUCT DIMENSIONS

YT930

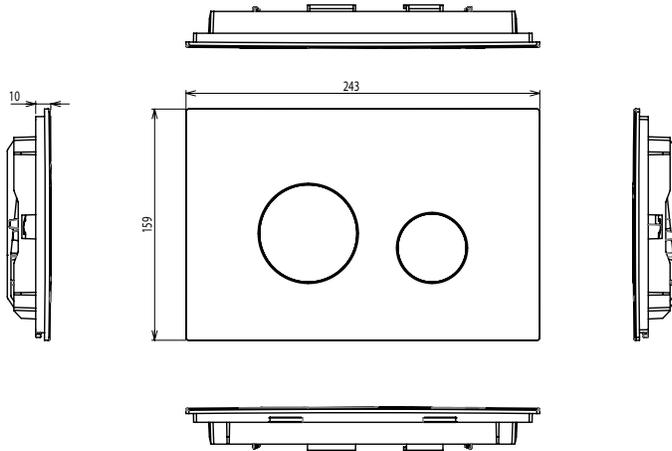

WT172M

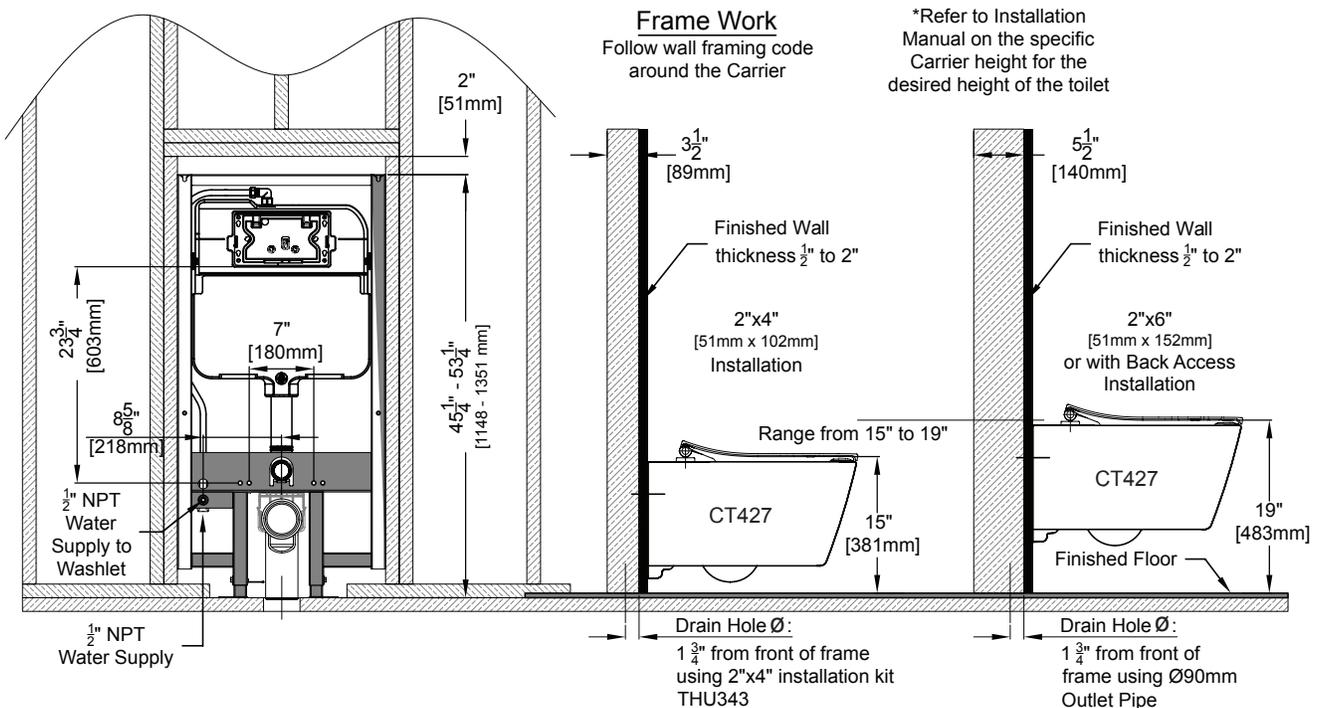

TOTO

These dimensions and specifications are subject to change without notice