

PROVINCETOWN

SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948975



CONTENTS

| | |
|----------------------|--------|
| TRIM | PAGE 2 |
| ROUGH-IN VALVE | PAGE 3 |

FEATURES


- Shape: Round
- Features: Pressure-Balanced
- Assembly Required: No
- Installation Type: Wall Mount
- Diverter Included: Yes
- Diverter Outlets: 2
- Dual Functionality Allows For One or Both Shower Features to Run at a Time
- Optional Rough-In Valve:**
 - Pressure Balanced With Integral Stops
 - One-Piece Cartridge Design For Ease of Maintenance
 - Back-to-Back Capability
 - Adjustable Temperature Limit Stop
 - Quick Remove Plaster Guard
 - Easy Mounting Brackets
 - With Restrictor Installed, This Valve is Compliant With CALGreen and the California Plumbing Code

REVISED 03/18/2021

PROVINCETOWN

SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE TRIM

SKU: 948975

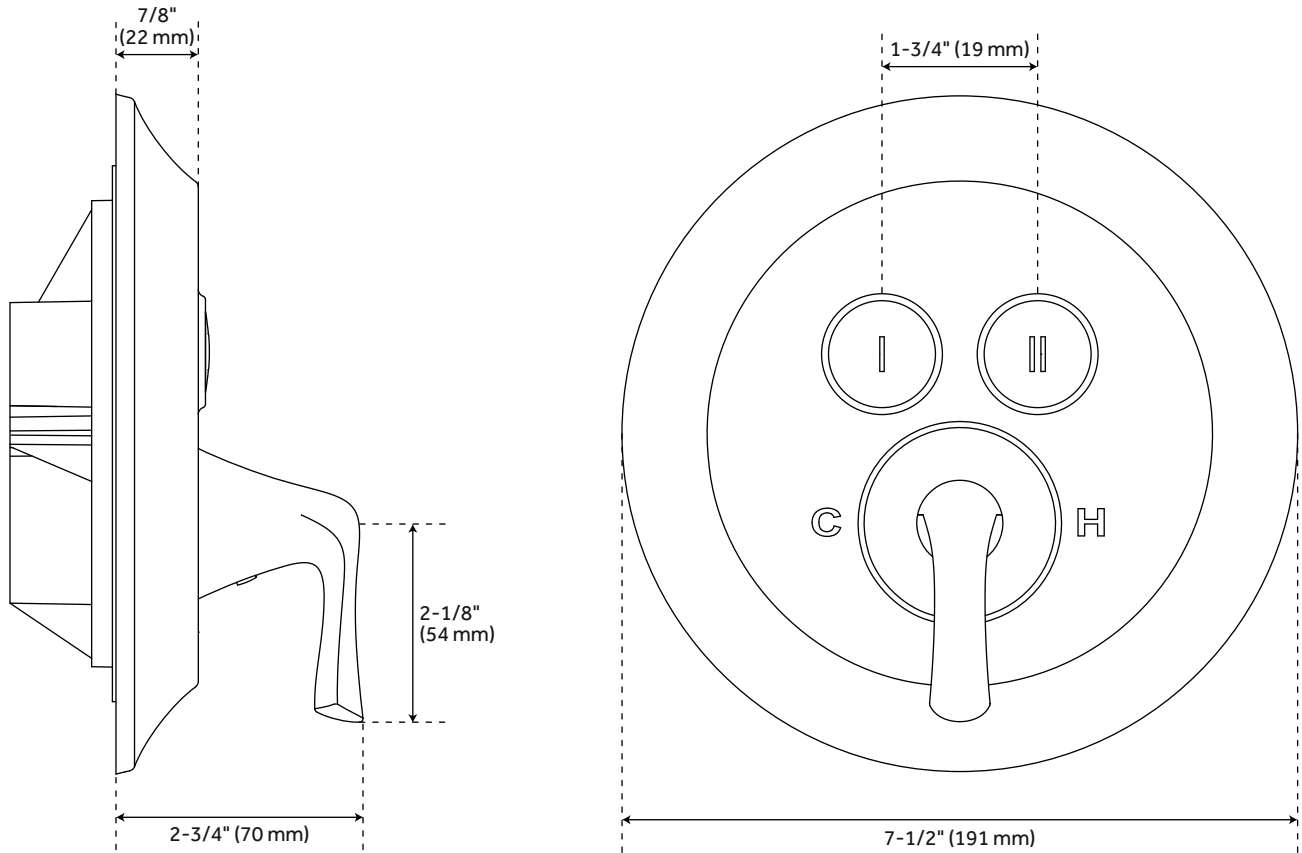

FEATURES

Material: Brass
Diameter: 7-1/2"
Depth: 2-3/4"
Connection: 1/2"-14 NPT

CODES/STANDARDS

cUPC
ASME A112.18.1/CSA B125.1
ICC/ANSI A117.1 (when installed
according to ADA standards)
Massachusetts Accepted

PRODUCT IMAGE




All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 2
Code: SHPR8040Z

PROVINCETOWN

OPTIONAL PRESSURE BALANCE ROUGH-IN VALVE

SKU: 948975

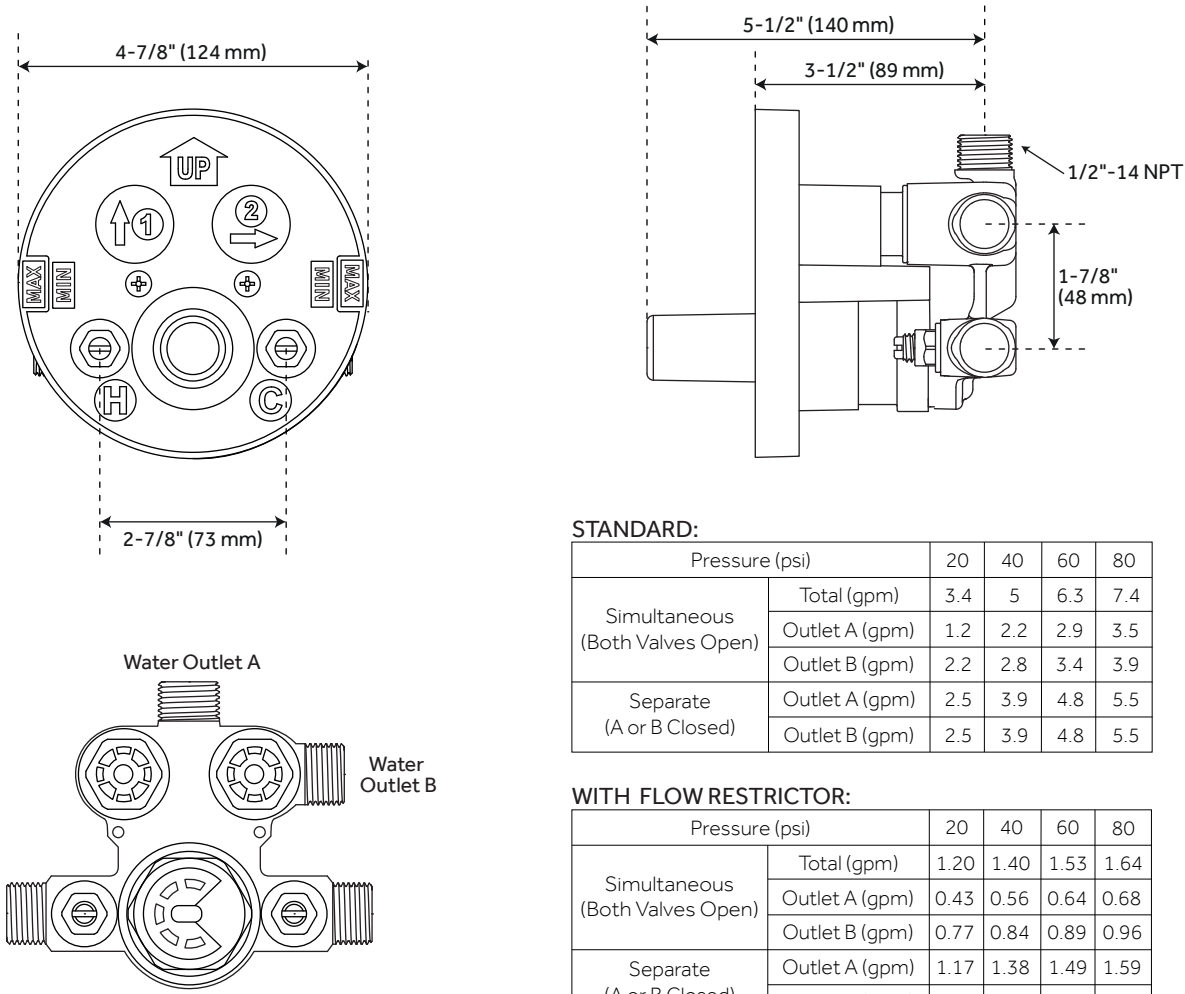

STANDARD:

| Pressure (psi) | | 20 | 40 | 60 | 80 |
|------------------------------------|----------------|-----|-----|-----|-----|
| Simultaneous (Both Valves Open) | Total (gpm) | 3.4 | 5 | 6.3 | 7.4 |
| | Outlet A (gpm) | 1.2 | 2.2 | 2.9 | 3.5 |
| | Outlet B (gpm) | 2.2 | 2.8 | 3.4 | 3.9 |
| Separate (A or B Closed) | Outlet A (gpm) | 2.5 | 3.9 | 4.8 | 5.5 |
| | Outlet B (gpm) | 2.5 | 3.9 | 4.8 | 5.5 |

WITH FLOW RESTRICTOR:

| Pressure (psi) | | 20 | 40 | 60 | 80 |
|------------------------------------|----------------|------|------|------|------|
| Simultaneous (Both Valves Open) | Total (gpm) | 1.20 | 1.40 | 1.53 | 1.64 |
| | Outlet A (gpm) | 0.43 | 0.56 | 0.64 | 0.68 |
| | Outlet B (gpm) | 0.77 | 0.84 | 0.89 | 0.96 |
| Separate (A or B Closed) | Outlet A (gpm) | 1.17 | 1.38 | 1.49 | 1.59 |
| | Outlet B (gpm) | 1.16 | 1.39 | 1.49 | 1.60 |

FEATURES

- Length: 4-7/8"
- Width: 4-3/8"
- Depth: 5-1/2"
- Connection: 1/2"-14 NPT

CODES/STANDARDS

- cUPC
- ASME A112.18.1/CSA B125.1
- ASSE 1016 Type P
- Massachusetts Accepted

PRODUCT IMAGE

