




F1960 POLY PEX COUPLING

- Simple and dependable plumbing connection
- Easy installation
- Leak-proof connections
- Polymer construction
- Manufactured of premium grade resin with non-mixed blends
- Can be used with F1960 PEX rings
- Tested and certified to ASTM F1960 and ASTM F877-2020
- Certified to NSF/ ANSI/CAN 61-2018, NSF/ANSI 14-2016, and NSF/ANSI 372-2011
- Certified to CSA B137.5-2020 and CSA B137.5-2017
- cUPC listed
- Certified by NSF

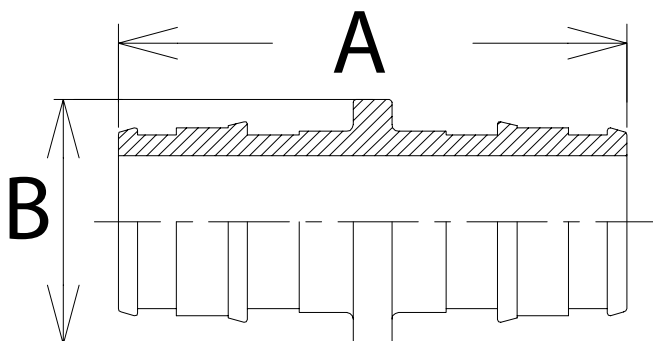

Part No.	Description	A - in (mm)	A Tolerance ± in (mm)	B - in (mm)	B Tolerance ± in (mm)	Weight lbs (grams)	Tolerance lbs (grams)
F76758	3/4" X 1" F1960	2.244 (56.989)	0.024 (0.601)	1.383 (35.137)	0.053 (1.355)	0.04 (15.88)	0.01 (2.27)
F76755	3/4" F1960	2.013 (51.122)	0.013 (0.322)	1.165 (29.583)	0.071 (1.795)	0.02 (6.80)	0.01 (2.27)
F76756	1/2" X 3/4" F1960	1.777 (45.144)	0.017 (0.440)	1.165 (29.583)	0.071 (1.795)	0.02 (6.80)	0.01 (2.27)
F76754	1/2" F1960	1.540 (39.116)	0.020 (0.508)	0.819 (20.811)	0.069 (1.761)	0.02 (6.80)	0.01 (2.27)
F76779	1" F1960	2.488 (63.195)	0.008 (0.203)	1.383 (35.137)	0.053 (1.355)	0.04 (15.88)	0.01 (2.27)

F1960 Specified Dimensions	ID - in (mm)	OD - in (mm)
1/2" End Connection	.40 (10.20)	.61 (15.59)
3/4" End Connection	.61 (15.60)	.87 (22.10)
1" End Connection	.82 (20.80)	1.11 (28.10)