



# Z5665-BWL1

HET Elongated Floor Mounted, ADA Height  
EcoVantage® Flush Valve Toilet System

TAG \_\_\_\_\_

## Architectural/Engineering Specification:

### Z5665-BWL1

#### EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency, ADA, floor mounted, bottom outlet toilet with siphon jet flushing action and elongated front rim with 1-1/2" top spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush.

### Z5665-BWL1-AM

#### EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency, ADA, floor mounted, bottom outlet toilet with siphon jet flushing action, ZurnSHIELD™ ceramic glaze and elongated front rim with 1-1/2" top spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush.

### Z5666-BWL1

#### EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency, ADA, floor mounted, bottom outlet toilet with siphon jet flushing action, ZurnSHIELD™ ceramic glaze and elongated front rim with integral bedpan lugs, and 1-1/2" top spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush.



## Product Features:

### Z5665 HET Series

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards, while using as little as 1.1 gallons of water per flush.
- Universal high efficiency toilet can be specified with 1.1 gpf [4.2 Lpf] , 1.28gpf [4.8Lpf], 1.6 gpf [6.0 Lpf] or dual flush valves.
- Vitreous china
- ADA height
- Elongated front rim
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Shipping weight 65 lbs.

## Compliance and Certification:

- Complies with ASME A119.2 / CSA B45.1
- ADA Compliant



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

## Variant Options:

### Z5665-BWL1

Z5665 Series Top spud toilet

### Z5665-BWL1-AM

Z5665 Series top spud toilet with ZurnSHIELD™ glaze

### Z5666-BWL1

Z5665 Series top spud toilet with Top Spud Toilet with integral bedpan lugs and ZurnSHIELD™ glaze

## Recommended Trim:

### Z5955SS-EL


Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.

### Z5972-COMB

Closet bolt & wax ring kit.

NOTE: To ensure system performance:  
Minimum Running Water Pressure = 25 psi.

See Zurn One Systems for suggested packages.

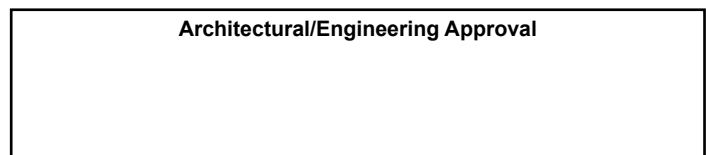

The information contained in this document is subject to change without notice.  
Please contact Zurn for most up to date information.

## Rough-in dimensions/Overview dimensions

