


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

|                                                                                  |  |                                |  |                            |  |
|----------------------------------------------------------------------------------|--|--------------------------------|--|----------------------------|--|
|  |  | <b>FLOOR &amp; AREA DRAINS</b> |  | <b>SPECIFICATION SHEET</b> |  |
|                                                                                  |  | Meets ASME Standard A112.6.3   |  | <b>TAG</b>                 |  |
| Project                                                                          |  | Engineer                       |  | Mechanical                 |  |

## 1100-A Adjustable Floor Drain w/ Round Top

**Regularly Furnished:** Painted cast iron floor drain body with flange, reversible cast iron clamping collar, seepage openings, 1/2" [13] primer tap with plug and adjustable type "A" round strainer assembly. Dimensions - Inches [mm]

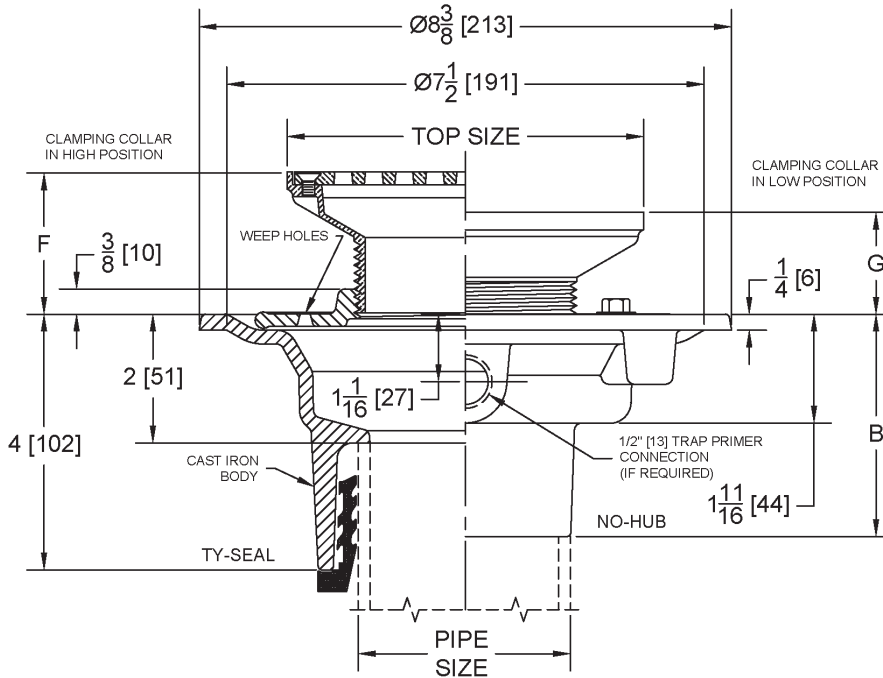

 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

| Top Size | F           |            |
|----------|-------------|------------|
|          | Min         | Max        |
| 5 [127]  | 1 7/16 [37] | 2 1/8 [54] |
| 6 [152]  | 1 1/2 [38]  | 2 3/8 [60] |
| 7 [178]  | 1 3/8 [35]  | 2 1/4 [57] |
| 8 [203]  | 1 3/8 [35]  | 2 1/4 [57] |
| 10 [254] | 1 7/8 [48]  | 3 1/4 [83] |

\* Dimensions vary from illustration

| Top Size | G          |            |
|----------|------------|------------|
|          | Min        | Max        |
| 5 [127]  | 15/16 [24] | 1 5/8 [41] |
| 6 [152]  | 1 [25]     | 1 3/4 [44] |
| 7 [178]  | 1 [25]     | 1 3/4 [44] |
| 8 [203]  | 1 [25]     | 1 5/8 [41] |
| 10 [254] | 1 5/8 [41] | 2 5/8 [67] |

| Top Style & Size | Outlet Size                 | -1<br>Satin Finish<br>Nickel<br>Bronze Top | -85<br>Stainless<br>Steel | Grate Free<br>Area<br>Sq.In. [Sq.cm] | Wt.<br>Lbs. [kg] |
|------------------|-----------------------------|--------------------------------------------|---------------------------|--------------------------------------|------------------|
| A5               | 2",3",4" [51,76,102]        |                                            |                           | 5.8 [37]                             | 4.0 [2]          |
| A6               | 2",3",4" [51,76,102]        |                                            |                           | 7.7 [50]                             | 4.4 [2]          |
| A7               | 2",3",4" [51,76,102]        |                                            |                           | 10.6 [68]                            | 5.1 [2]          |
| A8               | 2",3",4",6" [51,76,102,152] |                                            |                           | 14.0 [90]                            | 6.0 [3]          |
| A10              | 2",3",4",6" [51,76,102,152] |                                            |                           | 32.2 [208]                           | 10.5 [5]         |

| Outlet | No-Hub     | Inside Caulk | Threaded   |
|--------|------------|--------------|------------|
| B      | 3 1/2 [89] | 4 1/4 [108]  | 2 3/4 [70] |

| Outlet Variations |                 |  |
|-------------------|-----------------|--|
| Type              | Designation     |  |
| No-Hub            | 2NH,3NH,4NH,6NH |  |
| Push-On           | 2TY,3TY,4TY     |  |
| Inside Caulk      | 2IC,3IC,4IC     |  |
| Threaded          | 2IPS,3IPS,4IPS  |  |

| Suffix Options |                                                |                     |
|----------------|------------------------------------------------|---------------------|
| Suffix         | Description                                    |                     |
| ARC            | Acid Resistant Coating                         |                     |
| PC             | Debris Cover                                   |                     |
| DIA            | Deck Installation Assembly *                   |                     |
| EF6            | 6" [152] Round Funnel Assembly *               |                     |
| EG8            | 8 x 3 1/2 [203x89] Elongated Funnel Assembly * |                     |
| SO             | Side Outlet Body (2NH,3NH,4NH) *               |                     |
| TSD            | Trap Seal Device (See Model 4405) *            |                     |
| VP             | Vandal Proof                                   |                     |
| 23             | Grate Riser (Extends Grate 3/8" [10])          |                     |
| 27             | Sediment Bucket                                |                     |
| 31             | Backwater Valve                                |                     |
| 39             | Galvanized Cast Iron                           |                     |
| 94             | Cast Iron Extension Adapter *                  | Painted<br>39 Galv. |
| 102            | Chrome Plated Top Assembly                     |                     |

|                                              |         |                                              |          |          |                         |                       |
|----------------------------------------------|---------|----------------------------------------------|----------|----------|-------------------------|-----------------------|
| <b>Wade Specification Drainage Operation</b> |         | <b>116 Maple Street • Commerce, TX 75428</b> |          |          | <b>Ph: 800-638-9537</b> | <b>wadedrains.com</b> |
| Drawing Number                               | W1100-A | Date                                         | 09-20-22 | C.N. No. |                         | Revision              |