

MISENO

1.8 GPM Single Handle Pre-Rinse Kitchen Faucet Model MN06557CP, MN06557SS, MN06557FB


Installation Instructions

CAUTION-TIPS FOR REMOVAL OF OLD FAUCET:

Always turn off water supply before removing existing faucet or replacing any part of the faucet. Open the faucet handle to relieve water pressure and ensure that water is completely shut off.

CARE INSTRUCTIONS:


To preserve the finish of your faucet, apply non-abrasive wax. Any cleaners should be rinsed off immediately. Do not use abrasive cleaners on the faucet.

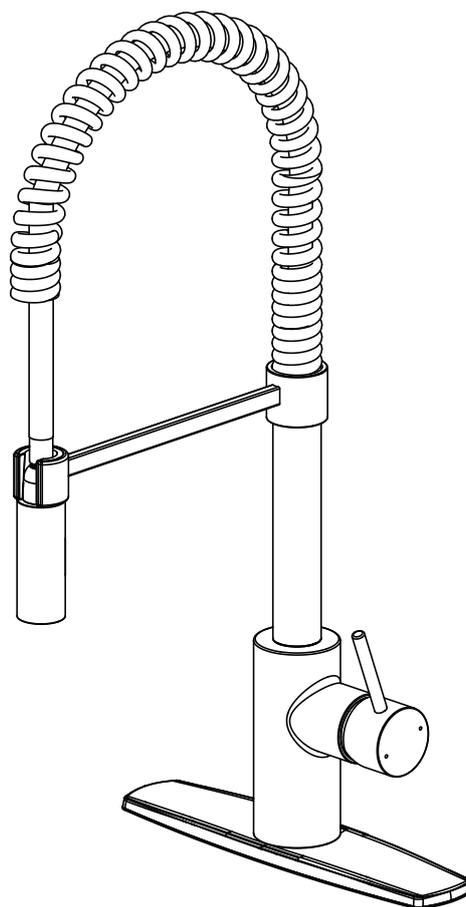


You may need




Goggles



Wrench



(2) Supply Lines




Basin Wrench




Sealant Tape




Silicone




2.5mm Hex Allen Wrench

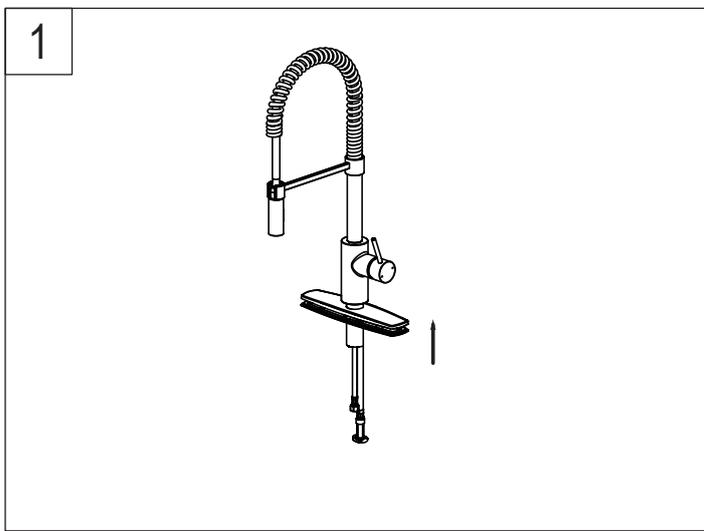


1. Install the flange on the faucet.

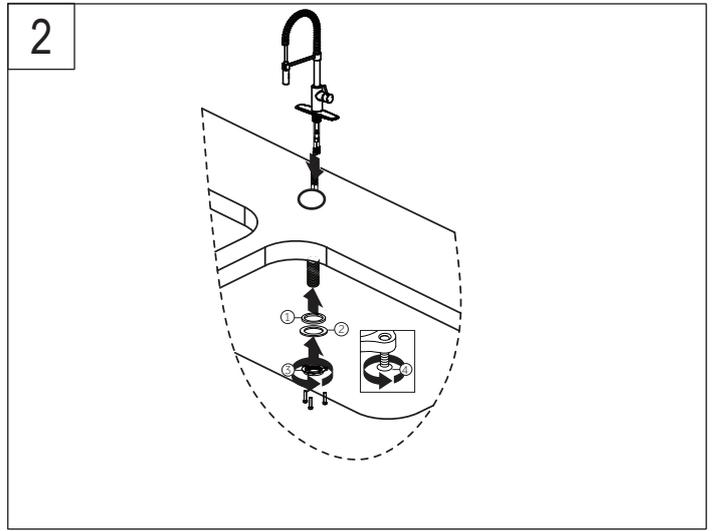


2. Thread the faucet through the mounting hole. Secure to sink by rubber washer (1), steel washer (2), tighten the lock nut (3), and mounting screws (4). Do not over tighten.

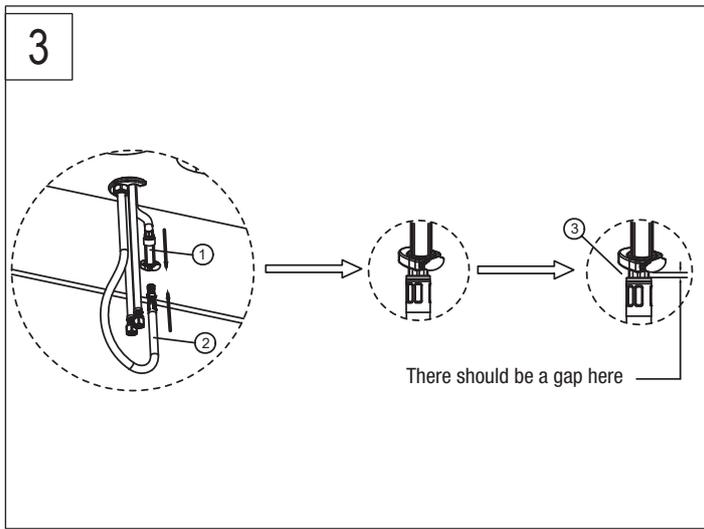


3. Connect the outlet hose (1) with pull-down hose (2). Confirm the bushing (3) return to original state.

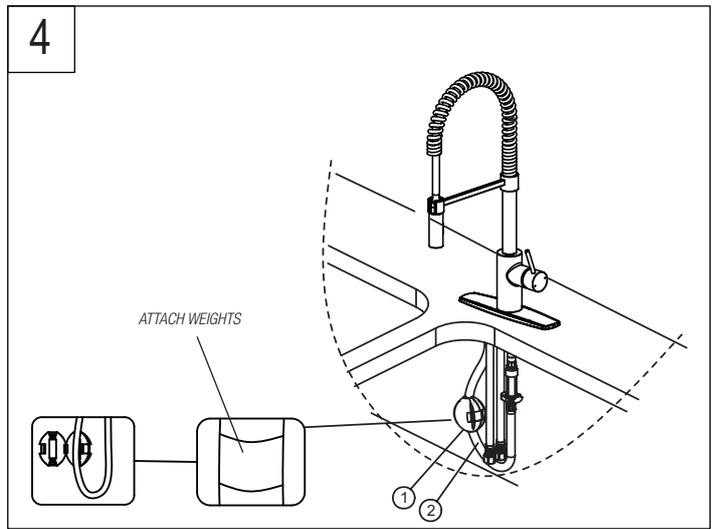

4. Set the weight (1) on the appropriate location of the pull-down hose (2).

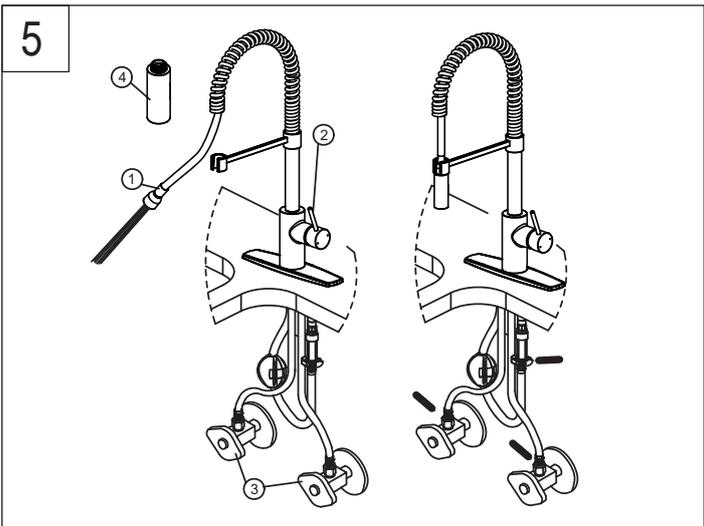

5. Connect to water supplies (hot and cold angle valve). Pull the hose assembly (1) out of the spout and be sure to hold the end of the hose down into the sink. Turn faucet handle (2) to be full on mixed position. Turn on hot and cold water supplies (3), and flush water lines for one minute. Turn off faucet handle, reinstall the sprayer (4), check all connections at arrows for leaks.

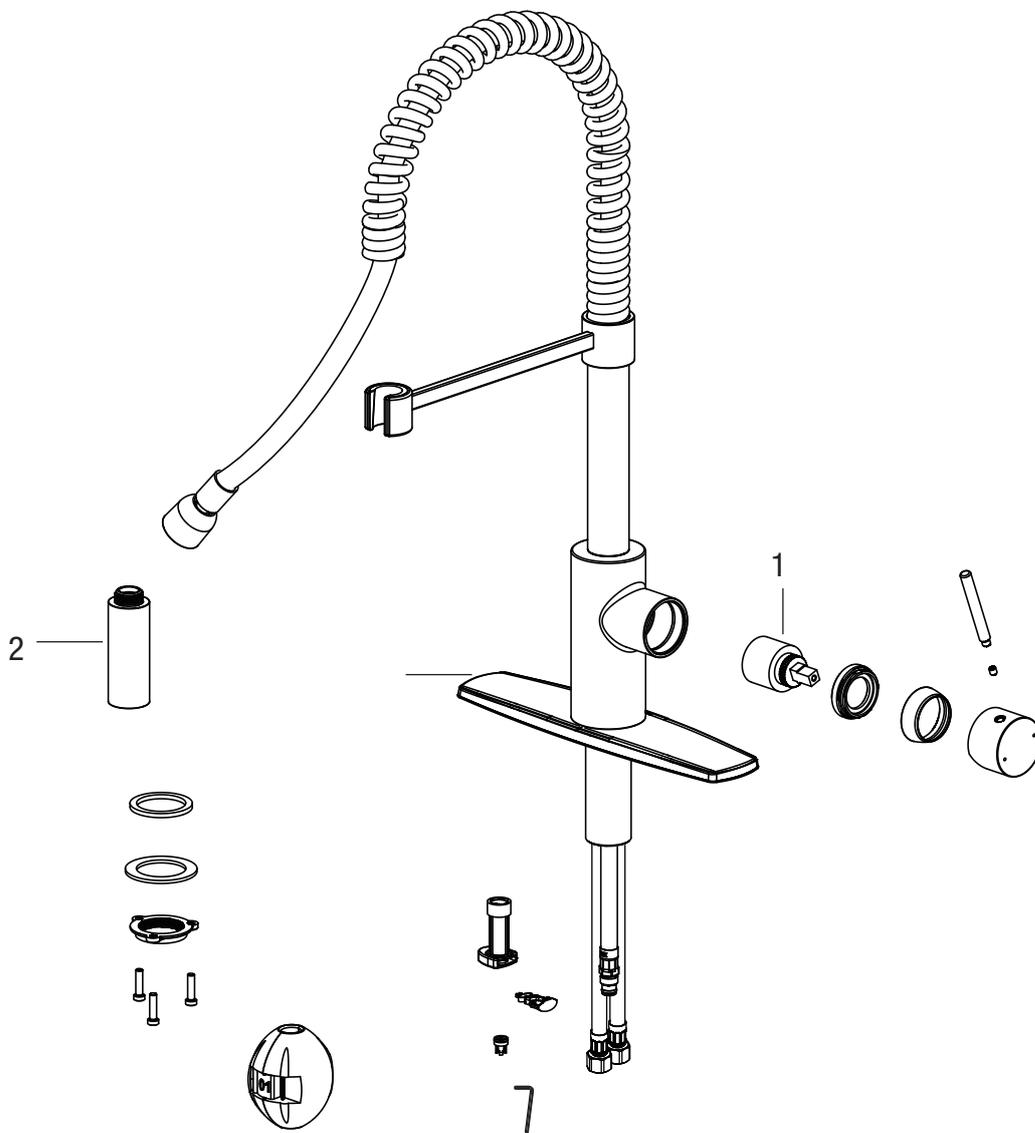

No.	Part & Code	
1	Cartridge	OBPF25D0005300PLO
2	Sprayhead	OBPF65F0018100CP
		OBPF65F0018100SS
		OBPF65F0018100FB