


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_



▲ Designate proper finish suffix

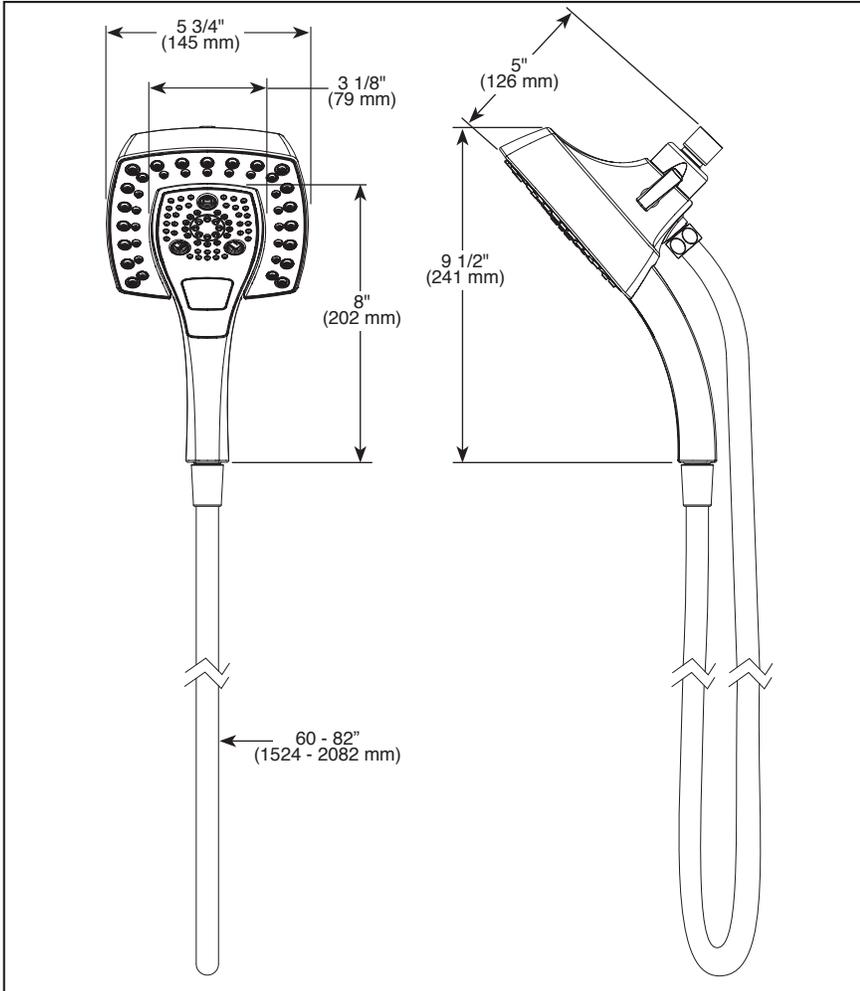

see what Delta can do™

**IN2ITION®**

- H<sub>2</sub>Okinetic® 2-In-1 Shower
- 5 Spray Setting Hand Shower

**FEATURES:**

- Touch-Clean® Nozzles
- H<sub>2</sub>Okinetic® PowerDrench Spray
- MagnaTite® Magnetic Docking
- Push Button Spray Selection
- Certified Dual Check Valves
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

**STANDARD SPECIFICATIONS:**

- Max. flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa (58474▲)
- Max. flow rate 2.5 gpm at 80 psi, 9.5 L/min @ 550 kPa (58474▲-25)
- Integrated hand shower docks securely into shower head when not in use
- Diverter allows for single or shared operation of shower head and hand shower
- 60 - 82" (1524 - 2082 mm) stretchable metal hose
- Multiple hand shower spray settings and pause feature - a non-positive shut-off
- Ball connector swivel angle is 30° (15° per side)
- Lumicoat™ is not applied to the shower hose

**WARRANTY**

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



**COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.3
- EPA WaterSense® - Applies to 58474-▲ and 58474-▲-PR only