

**Thermostatic Mixing Valve  
(For 0.35gpm Lavatory Faucets)**

**FEATURES**

- Below deck thermostatic mixing valve allowing fixed ambient water temperature adjustment
- ASSE approved wax type thermostatic valve to efficiently adjust temperature for ultra-low flow 0.35gpm auto faucet to avoid the outflow of scalding water
- G1/2" (1/2" NPSM compatible) threaded fittings
- Low-lead solid brass construction
- Equipped with integral check valves and debris screens for back flow prevention

**OPTIONAL COMPONENTS**


- THP3237 Swivel Coupling

**CODES/STANDARDS**

- Meets or exceeds NSF372, ASSE 1070 / ASME A112.1070 / CSA B125.70
- Certifications: IAPMO(cUPC), State of Massachusetts, and others
- Complies with Federal and State statutes as low-lead (contains a weighted average of 0.25% lead or less)
- Complies with CA Prop 65 warning requirements



**DIMENSIONS**

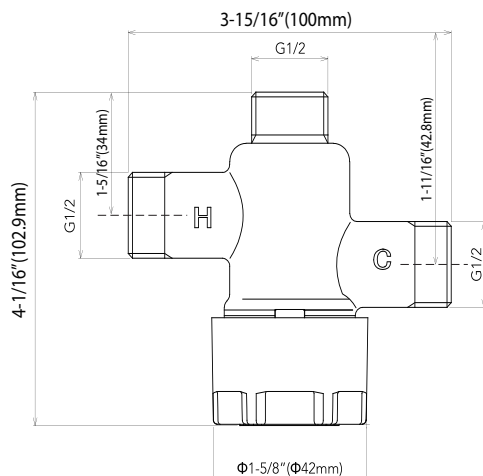

**SPECIFICATIONS**

<b>Water Supply Pressure</b>	Min (Flowing): 15 psi (100 kPa) Max (Static): 80 psi (551 kPa)
<b>Water Supply Connection</b>	G1/2" (1/2" NPSM compatible)
<b>Ambient Temp.</b>	32 - 104°F (0 - 40°C)
<b>Humidity</b>	Max. 90% RH
<b>Recommended Temp. Range</b>	Hot Supply: 120 - 180°F (49 - 82°C) Cold supply 39 - 80°F (4 - 27°C)
<b>Temp. Adjustment Range at Outlet</b>	Ambient water temp ~ 120°F (48.9°C)
<b>Factory Default Outlet Temp.</b>	100±4°F (38±2°C) (Condition: 30psi (206kPA) Ambient water temp and hot water temp 176°F)
<b>Minimum Flow</b>	0.35 gpm (1.3L/min)
<b>Warranty</b>	Three Year Limited
<b>Shipping Weight</b>	1.2 lbs
<b>Shipping Dimensions</b>	4-3/8" x 4-3/16" x 3-9/16"

