

**CREST COMMERCIAL  
CONDENSING BOILER WITH  
HELLCAT COMBUSTION TECHNOLOGY**

*Submittal Sheet*



**Lochinvar®**  
HIGH EFFICIENCY BOILERS & WATER HEATERS

**MODELS  
FCB1000 - FCB6000**



**FCB-Sub-01**

Job Name: \_\_\_\_\_

Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Type Gas: \_\_\_\_\_


Engineer: \_\_\_\_\_

Model #: \_\_\_\_\_


Agent/Wholesaler: \_\_\_\_\_

Equipment Tag(s): \_\_\_\_\_


**SIDE**

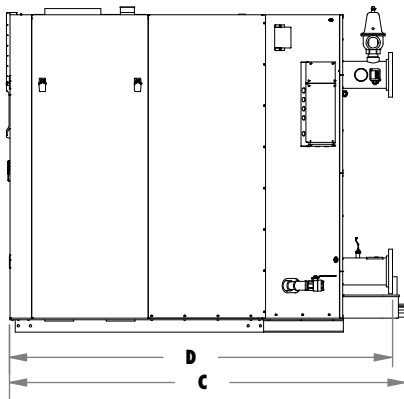

**BACK**

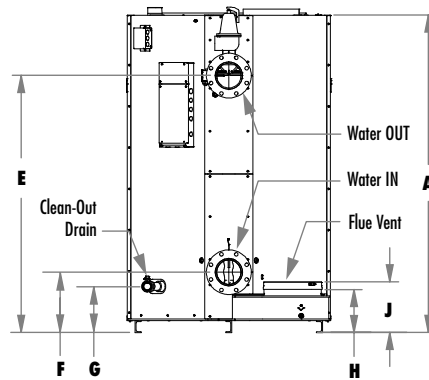

**TOP**

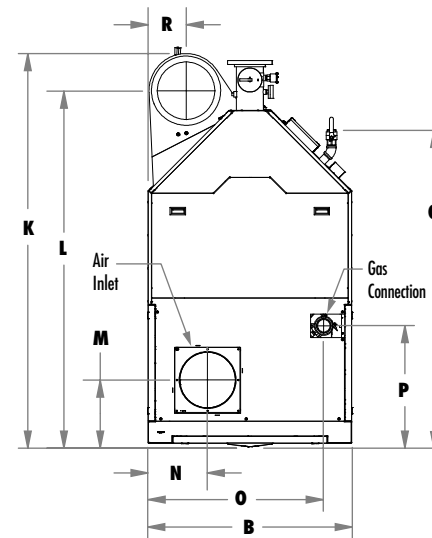

**JOB NOTES:**

Notes:

- \* Add "N" for natural gas, "L" for LP gas models
- Low NOx Operation.
- Lochinvar should be consulted before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.
- The ratings have been determined under the provisions governing forced draft burners.
- The Net AHRI water ratings shown are based on a piping and pickup allowance of 1.15.

Model Number	Input MBH		Turn-down	Gross Output MBH	Net Rating MBH	Combustion Eff. %	Thermal Eff. %	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	Gas Conn.	Water Inlet/Outlet	Air Intake	Vent Size	Oper. Weight (with water)	Ship. Weight (lbs.)
	Min	Max																												
FCB1000	50	999	20:1	961	836	96.4%	96.2%	78"	30"	56"	57-1/2"	66-1/8"	11-7/8"	11-3/8"	11-1/4"	12-1/2"	55-1/2"	51-3/4"	12-3/4"	6-1/2"	26"	21-1/2"	48-3/4"	6-1/2"	1-1/4"	3"	6"	6"	1,939	1,721
FCB1500	60	1,500	25:1	1,443	1,255	96.4%	96.2%	78"	30"	63-3/4"	64"	65-3/8"	12-3/8"	11-3/8"	11-1/4"	12-1/2"	63-1/4"	58-1/4"	13-1/4"	7-1/2"	25-3/4"	23-1/4"	55-3/4"	5-1/8"	1-1/2"	4"	8"	8"	2,345	1,985
FCB2000	80	1,999	25:1	1,923	1,672	96.4%	96.2%	78"	30"	62-1/2"	64-1/4"	65-3/8"	12-3/8"	11-3/8"	11-1/4"	12-1/2"	62-1/4"	57-1/4"	12"	7-1/2"	26"	21-1/2"	55-1/2"	5-1/8"	1-1/2"	4"	8"	8"	2,622	2,120
FCB2500	125	2,500	20:1	2,400	2,087	96.1%	96%	77-3/4"	35"	79-1/4"	79-1/4"	63-3/4"	13-1/2"	11-1/4"	10-1/2"	12-1/4"	79"	71-3/4"	17-1/4"	9-1/4"	30-1/4"	28"	67"	7-1/4"	2"	4"	8"	9"	3,555	2,812
FCB3000	150	3,000	20:1	2,883	2,507	96.1%	96%	77-3/4"	35"	79-1/4"	79-1/4"	63-3/4"	13-1/2"	11-1/4"	10-1/2"	12-1/4"	79"	71-3/4"	17-1/4"	9-1/4"	30-1/4"	28"	67"	7-1/4"	2"	4"	10"	10"	3,582	2,848
FCB4000	200	3,999	20:1	3,843	3,342	96.1%	96%	78"	43-1/4"	95-1/4"	90-3/4"	63-1/2"	13-3/4"	11-1/2"	10-3/4"	12-1/2"	94-3/4"	85-3/4"	19"	11-1/4"	36-1/2"	35"	77"	10-1/2"	2-1/2"	4"	12"	12"	4,882	3,874
FCB5000	250	4,999	20:1	4,804	4,177	96.1%	96%	78"	46-1/2"	96-1/2"	94"	63-1/2"	15"	11-1/2"	10-3/4"	12-1/2"	96-1/4"	87"	18-3/4"	13"	39-3/4"	34"	78-1/2"	9"	2-1/2"	6"	14"	14"	5,920	4,470
FCB6000	300	6,000	20:1	5,766	5,014	96.1%	96%	78"	50"	102-3/4"	99-3/4"	63-1/4"	14-3/4"	11-1/2"	10-3/4"	12-1/2"	96-1/2"	87-1/2"	16-1/2"	14-3/4"	43-1/4"	29-3/4"	78"	9-1/4"	3"	6"	14"	14"	6,755	4,862

# CREST<sup>®</sup> + HELLCAT<sup>™</sup>

CONDENSING BOILER COMBUSTION TECHNOLOGY

## Codes & Registrations

ANSI Z21.13/CSA Certified	CSD1 / Factory Mutual / GE Gap Compliant
ASME Certified, "H" Stamp / National Board	South Coast Air Quality Management District Qualified (FB 1000-2000)
California Code Compliant	AHRI Certified
Canadian Registration Number (CRN)	

## Standard Features

- › Hellcat Combustion Technology featuring RealTime O<sub>2</sub> Trim<sup>™</sup>
- › Proof of Closure Valve (FCB 6000)
- › Modulating Burner with up to 25:1 Turndown
- › Direct-Spark Ignition
- › Low NOx Operation
- › Sealed Combustion
- › Air Inlet Filter
- › Low Gas Pressure Operation
- › Vertical and Horizontal Direct Venting
  - › Direct Vent up to 150 Feet
  - › PVC, CPVC, Polypro or AL29-4C (FCB 1000-4000)
  - › AL29-4C (FCB 1000-6000)
- › ASME "H" Stamped Heat Exchanger
- › 316L Stainless Steel Fire Tubes
- › 160 psi Working Pressure
- › On/Off Switch
- › Interior Service Light
- › Adjustable High Limit with Manual Reset
- › Low Water Cutoff with Manual Reset & Test
- › High & Low Gas Pressure Switches w/Manual Reset
- › Low Air Pressure Switches indicate Blocked Vent/Air
- › Condensate Trap w/Blocked Drain Switch
- › Drain Valve
- › System Sensor
- › Outdoor Air Sensor
- › Inlet & Outlet Temperature Sensors
- › High-Voltage Terminal Strip
- › Low-Voltage Terminal Strip
- › Downstream Gas Test Cocks
- › 50 psi ASME Relief Valve
- › Temperature & Pressure Gauge
- › Zero Clearances to Combustible Materials
- › SCCR of 5,000 A
- › See Warranty for Details
  - › 10-Year Limited Warranty
  - › 5-Year Warranty on Burner
  - › 18-Month Warranty on Parts
  - › Lifetime Thermal Shock

## Smart Touch<sup>™</sup> Features

- › CON-X-US Remote Connect
- › SMART TOUCH Touchscreen Operating Control
- › Full-Color 10" Capacitive Touchscreen LCD Display
- › Built-in Cascading Sequencer for up to 8 Boilers
  - › Built-in Redundancy
  - › Cascade Multiple Sized Boilers
  - › Lead/Lag Cascade
  - › Efficiency Optimized Cascade
- › Front-End Loading Capability with Copper-Fin II<sup>®</sup> and Power-Fin<sup>®</sup> Boilers
- › Building Management System Integration with 0-10 VDC Input
- › BACnet MSTP Communications
- › Outdoor Reset Control with Outdoor Air Sensor
- › Password Security
- › Domestic Hot Water Prioritization
  - › DHW tank piped with priority in the boiler loop
  - › DHW tank piped as a zone in the system with the pumps controlled by the Smart Touch
  - › DHW Modulation Limiting
  - › Separately Adjustable SH/DHW Switching Times
- › Low Water Flow Safety Control & Indication
- › Inlet & Outlet Temperature Readout
- › Freeze Protection
- › Service Reminder
- › Time Clock
- › Data Logging
  - › Hours Running, Modulation Rate
  - › Ignition Attempts
  - › Last 10 Lockouts with Burner State
  - › Recycling Reporting
- › Programmable System Efficiency Optimizers
  - › Night Setback
  - › Anti-Cycling
  - › Outdoor Air Reset Curve
  - › Ramp Delay
  - › Boost Temperature & Time
  - › Modulation Factor Control
- › Pump Control Board (24V) with LED Indicators
  - › System Pump, Boiler Pump, DHW Pump, DHW Recirculation Pump (future) and Bypass Pump (future)



- › High-Voltage Terminal Strip
  - › 120V/1PH/60Hz Power Supply (FCB 1000-2000)
  - › 208V/3PH/60Hz Power Supply (FCB 2500-3000)
  - › 480V/3PH/60Hz Power Supply (FCB 4000-6000)
- › Low-Voltage Terminal Strip
  - › 24 VAC Auxiliary Device Relay
  - › Auxiliary Proving Switch Contacts
  - › Alarm on Any Failure Contacts
  - › Runtime Contacts
  - › DHW Thermostat Contacts
  - › Unit Enable/Disable (Demand) Contacts
  - › System Sensor Input
  - › DHW Tank Sensor Contacts
  - › Outdoor Air Sensor Contacts
  - › Cascade Contacts
  - › 0-10 VDC BMS External Control Contact
  - › 0-10 VDC Variable Speed Boiler Pump Control Contact
  - › 0-10 VDC System Pump Speed Input Contact
  - › Flow Switch / Low Water Cutoff Contact

## Optional Equipment

- Alarm on Any Failure
- ASME Relief Valve Option:
  - 75 psi    100 psi    125 psi    150 psi
- BMS Gateway - BACnet IP or LonWorks
- Condensate Neutralization Kit
- Common Vent Damper Kits
- Modbus Communication
- Short Circuit Current Rating (SCCR) Options:
  - FCB 2500 - 6000**
  - 100,000 A
  - 200,000 A
- Motorized Isolation Valve
- Variable Speed Boiler Pump
- Wireless Outdoor Temperature Sensor
- Electrical Transformer Options (Shipped Loose)**
- › FCB 1000-2000:
  - 208V/3PH/60Hz → 120V/1PH/60Hz
  - 480V/3PH/60Hz → 120V/1PH/60Hz
  - 600V/3PH/60Hz → 120V/1PH/60Hz
- › FCB 2500-3000:
  - 480V/3PH/60Hz → 208V/3PH/60Hz
  - 600V/3PH/60Hz → 208V/3PH/60Hz
- › FCB 4000-6000:
  - 208V/3PH/60Hz → 480V/3PH/60Hz
  - 600V/3PH/60Hz → 480V/3PH/60Hz



Lochinvar, LLC  
300 Maddox Simpson Parkway  
Lebanon, Tennessee 37090  
P: 615.889.8900 / F: 615.547.1000  
f i n @ Lochinvar.com