


F1960 POLY PEX MANIFOLD WITH OPEN END



- Simple and dependable plumbing connection
- Easy installation
- Leak-proof connections
- Polymer construction
- Manufactured of premium grade resin with non-mixed blends
- Can be used with F1960 PEX rings
- 1/2" branch outlets
- Tested and certified to ASTM F1960 and ASTM F877-2020
- Certified to NSF/ ANSI/CAN 61-2018, NSF/ANSI 14-2016, and NSF/ANSI 372-2011
- Certified to CSA B137.5-2020 and CSA B137.5-2017
- cUPC listed
- Certified to NSF

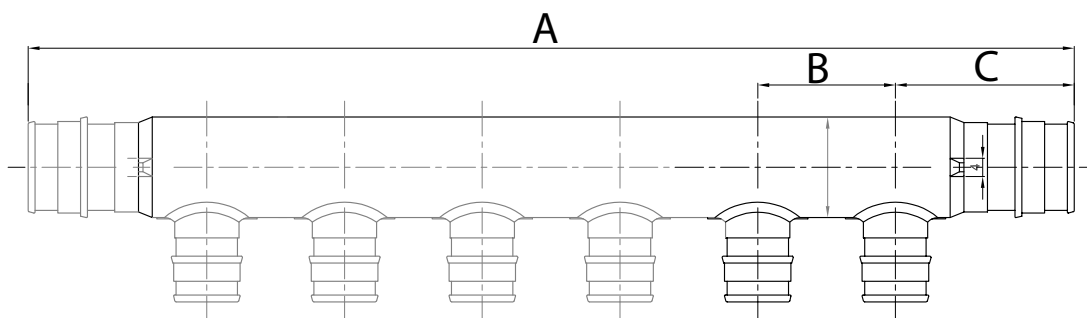

Part No.	Description	A - in (mm)	A Tolerance ± in (mm)	B - in (mm)	B Tolerance ± in (mm)	C - in (mm)	C Tolerance ± in (mm)	Weight lbs (grams)	Tolerance lbs (grams)
F76007	3/4" F1960, 6-Port with Open End	9.03 (229.40)	-	1.19 (30.20)	-	1.54 (39.20)	-	0.15 (68.04)	-
F76006	3/4" F1960, 4-Port with Open End	7.007 (177.978)	0.375 (9.068)	1.220 (30.988)	0.030 (0.762)	1.674 (42.507)	0.134 (3.391)	0.10 (45.36)	0.01 (2.27)
F76002	3/4" F1960, 3-Port with Open End	5.787 (146.990)	0.327 (8.306)	1.220 (30.988)	0.030 (0.762)	1.674 (42.507)	0.134 (3.391)	0.08 (36.29)	0.01 (2.27)
F76001	3/4" F1960, 2-Port with Open End	4.572 (116.129)	0.292 (7.417)	1.220 (30.988)	0.030 (0.762)	1.674 (42.507)	0.134 (3.391)	0.06 (27.22)	0.01 (2.27)

F1960 Specified Dimensions	ID - in (mm)	OD - in (mm)
1/2" End Connection	.40 (10.20)	.61 (15.59)
3/4" End Connection	.61 (15.60)	.87 (22.10)
1" End Connection	.82 (20.80)	1.11 (28.10)