



Compact Fluorescent


Step Lights

Step Lights

Type _____
-31

P6802 ☐

Catalog No.	Finish	Lamping	Dimensions (Inches)				
	Black		A	B	C	D	E
P6802	-31	1-7w Twin CF (2-pin)	8-1/2	3-1/4	3-1/2	7-3/4	2-1/2

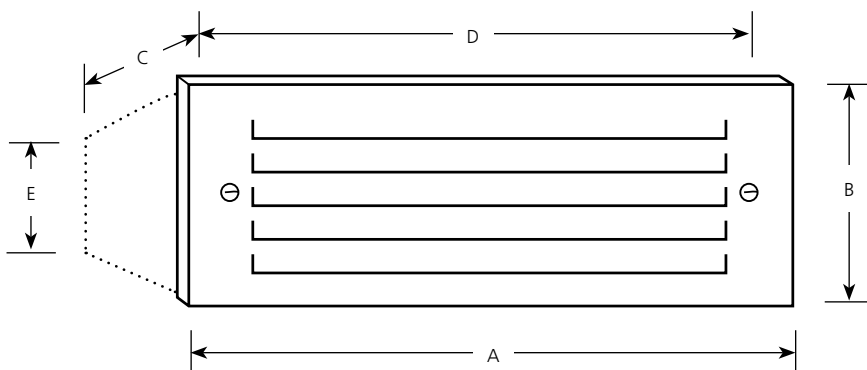

Specifications:

General

- Sized to replace standard brick dimensions
- Cast aluminum housing
- Stamped aluminum louvered face plate painted black
- White aluminum interior reflector
- Clear acrylic panel mounted behind the louver to provide a sealed unit

Mounting

- Recessed in wood, brick, masonry and poured concrete mount

Electrical

- 120 volt NPF ballast
- Minimum starting temperature -0 degrees
- Three 1/2" I.P. conduit entries
- Can wire units in rows without need for separate outlet boxes
- G23 base socket
- Pre-wired

Labeling

- UL-CUL Wet location listed

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 02/14