

Auto Sensor TOTO Soap Dispenser

FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounting hardware and supply lines
- Chrome plated
- Single-hole mount
- TOTO Soap required
- Refillable tank system
- ADA compliant

MODELS

- **1 SPOUT**
TLK03001G#CP (Spout) (Must Purchase 1 Unit)
TLK01101U (Controller & Reservoir)
- **2 SPOUT**
TLK03001G#CP (Spout) (Must Purchase 2 Units)
TLK01102U (Controller & Reservoir)
- **3 SPOUT**
TLK03001G#CP (Spout) (Must Purchase 3 Units)
TLK01103U (Controller & Reservoir)

COLORS/FINISHES

- #CP Polished Chrome

OPTIONAL ACCESSORY

- THP3140#CP
Escutcheon 1-1/8" ~ 1-1/2" (28mm~38mm)



Auto Functions

PRODUCT SPECIFICATION

TOTO® Model No. _____
Product shall be automatic infrared sensor activated. Product shall have automatic sensor adjustment upon installation. Soap dispenser and controller w/ reservoir will be sold separately. Product shall have a controller pump with 0.8 gallon (3L) reservoir.

CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC
- ADA Compliant



TOTO SOAP *(Sold Separately)*

Product No.	Quantity	Packaging	Notes
TSFG1	4 gallons	Package of 4, 1 gal. each	Antimicrobial Soap (Fragrance Free)
TSFG5	5 gallons	Packaged as 1, 5 gal. container	Antimicrobial Soap (Fragrance Free)
TSFG55	55 gallons	Packaged as 1, 55 gal. drum	Antimicrobial Soap (Fragrance Free)
TSFB1-GS	4 gallons	Package of 4, 1 gal. each	TOTO Foam Soap Green Seal™ (Lilac)
TSFB5-GS	5 gallons	Packaged as 1, 5 gal. container	TOTO Foam Soap Green Seal (Lilac)



TLK03001G & TLK01101/2/3U

Auto Sensor TOTO Soap Dispenser

SPECIFICATIONS


Power Supply	AC 120V
Wattage	(TLK01101U) 4W (TLK01102U) 6.5W (TLK01103U) 9W
Sensor Detection Range	5-1/8" ~ 7-7/8" (130~200mm) Sensor is self-adjusting
Ambient Temperature	34-104°F(1-40°C)
Humidity	Max. 90% RH
Power Cord Length	55" (1.4 m)
Soap Output Volume	0.04 oz (factory setting)
Tank Capacity	Approximately 0.8 gal (3L)
Warranty	*Three Year Warranty

*Failure to use TOTO soap will void warranty

INSTALLATION NOTES

- Spout Mounting Hole $\phi 1" \sim \phi 1\text{-}1/8"$ ($\phi 25 \sim \phi 28$ mm)
- Deck Thickness 1/4" ~ 1-1/8" (5 ~ 30 mm)

DIMENSIONS

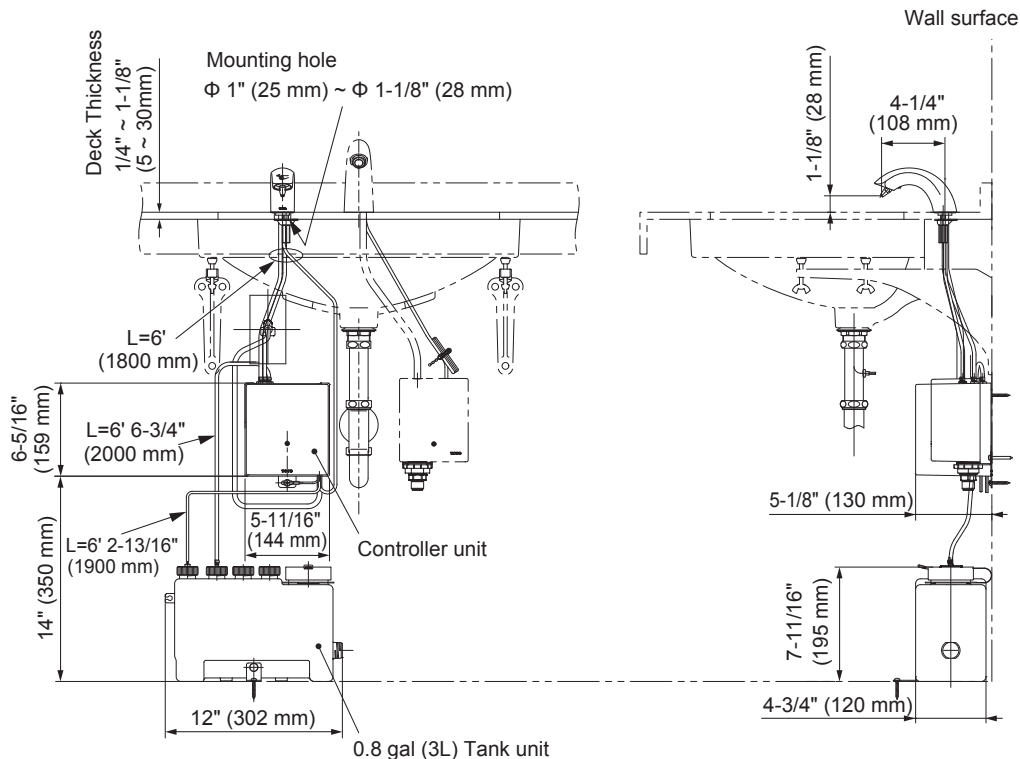

TOTO

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

These dimensions and specifications are subject to change without notice

#SS-01444 v.01