

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 12/50



Expert for asphalt compaction
Special base plate shape for working
on asphalt




Compact
Guide handle without tool folding - fits
in any car boot



**Spraying system especially for
asphalt applications**
13L water tank and spraying system
on base plate (optional)

Shipping dimensions in m3
BP 12/50

0,174

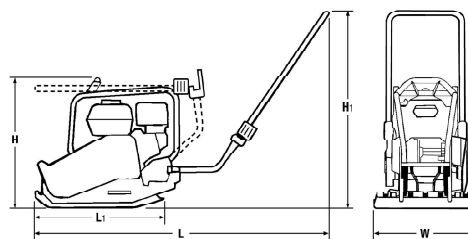

Standard Equipment

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Hand-arm vibrations <5m/s2
- ☒ Automatic shutdown at low oil level
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Single point lifting device
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (13l)
- ☐ Spraying system, base plate (500mm)
- ☐ Transport wheels
- ☐ Vulcolan mat
- ☐ Hour meter
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

Dimensions in mm

	H	H1	L	L1	W
BP 12/50	456	555	1273	535	500

Technical Data

BOMAG
BP 12/50

Weights

Operating weight CECE	kg	73
Basic weight	kg	

Dimensions

Working width	mm	500
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda	
Engine type	GX 120	
Emission stage	Stage V / CARB P.3	
Cooling	air	
Number of cylinders	1	
Performance SAE J 1349	kW	2.6
Speed	min-1	3.600
Drive system	mech.	
Fuel	Gasoline	
Fuel comsump. aver. during operation	l/h	0.9

Exciter system

Frequency	Hz	96
Centrifugal force	kN	12
Amplitude	mm	1,10

Capacities

Fuel	l	2,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 834 69 010

120325 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

