



## Model P312

Industrial Strength, 1" & 2" Disposable Panel Filters with Synthetic Media

Our long standing excellence in providing durable, top performing disposable filters is applied to the manufacturing of poly fiber **P312** filters. P-312 filters can be used as replacement for F-312 Fiberglass filters. Ideally suited for residential, commercial, or light industrial use, the polyester media was developed for situations where synthetic media products are best suited.

**Frame** – The **P312** frame is produced using post consumer materials. The unique Monobond pinch frame concept involves a one-piece frame sealed to the media under heat and pressure. This construction feature produces a continuous bond of media to board around the periphery of the frame, eliminating weak corners and air bypass. The use of a high tensile strength binder increases the integrity of the seal, allowing the filter to withstand varying temperatures and humidity levels.

**Media** – The synthetic media used in a **P312** consists of polyester fibers bonded together in an interlocking pattern of tiny lint and dust traps. This configuration maximizes dust loading while minimizing resistance to air flow and surface loading.

**Application** – **P312** filters perform best in conditions where large quantities of lint and dust are present. The rugged construction makes them industry leaders in the high velocity system, prefilter market.



### Pinch Frame Design

- Improved aerodynamics reduce restriction to air flow
- Safe, easy, fast installation
- Larger effective filtering surface area
- Wide selection of standard sizes
- Classified per UL Standard 900 for flammability




ENGINEERING YOUR SUCCESS.

# Model P312

Industrial Strength, 1" & 2" Disposable Panel Filters with Synthetic Media

Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow Capacity (CFM)	Initial Resistance (Inches W.G.) @ Rated Air Flow	Media Area (Square Feet)
P312-STD1	8 X 16 X 1	7-15/16 X 15-7/8 X 7/8	265	0.07"	0.9
P312-STD1	8 X 30 X 1	7-15/16 X 29-7/8 X 7/8	500	0.07"	1.7
P312-STD1	10 X 10 X 1	9-7/8 X 9-7/8 X 7/8	210	0.07"	0.7
P312-STD1	10 X 16 X 1	9-7/8 X 15-7/8 X 7/8	335	0.07"	1.1
P312-STD1	10 X 20 X 1	9-7/8 X 19-5/8 X 7/8	415	0.07"	1.4
P312-STD1	10 X 24 X 1	9-7/8 X 23-3/4 X 7/8	500	0.07"	1.7
P312-STD1	10 X 25 X 1	9-7/8 X 24-5/8 X 7/8	520	0.07"	1.7
P312-STD1	10 X 30 X 1	9-7/8 X 29-7/8 X 7/8	625	0.07"	2.1
P312-STD1	12 X 12 X 1	11-7/8 X 11-7/8 X 7/8	300	0.07"	1.0
P312-STD1	12 X 16 X 1	11-7/8 X 15-7/8 X 7/8	400	0.07"	1.3
P312-STD1	12 X 18 X 1	11-7/8 X 17-7/8 X 7/8	440	0.07"	1.5
P312-STD1	12 X 20 X 1	11-7/8 X 19-5/8 X 7/8	500	0.07"	1.7
P312-STD1	12 X 24 X 1	11-7/8 X 24-3/4 X 7/8	600	0.07"	2.0
P312-STD1	12 X 25 X 1	11-7/8 X 24-5/8 X 7/8	625	0.07"	2.1
P312-STD1	12 X 30 X 1	11-7/8 X 29-7/8 X 7/8	750	0.07"	2.5
P312-STD1	14 X 14 X 1	13-7/8 X 13-7/8 X 7/8	410	0.07"	1.4
P312-STD1	14 X 16 X 1	13-7/8 X 15-7/8 X 7/8	465	0.07"	1.6
P312-STD1	14 X 18 X 1	13-7/8 X 17-1/8 X 7/8	525	0.07"	1.8
P312-STD1	14 X 20 X 1	13-7/8 X 19-5/8 X 7/8	585	0.07"	1.9
P312-STD1	14 X 24 X 1	13-7/8 X 23-3/4 X 7/8	700	0.07"	2.3
P312-STD1	14 X 25 X 1	13-7/8 X 24-5/8 X 7/8	730	0.07"	2.4
P312-STD1	14 X 30 X 1	13-7/8 X 29-7/8 X 7/8	875	0.07"	2.9
P312-STD1	15 X 20 X 1	14-7/8 X 19-5/8 X 7/8	625	0.07"	2.1
P312-STD1	15 X 25 X 1	14-7/8 X 24-5/8 X 7/8	780	0.07"	2.6
P312-STD1	15 X 30 X 1	14-7/8 X 29-7/8 X 7/8	940	0.07"	3.1
P312-STD1	15 X 30-5/8 X 1	14-7/8 X 30-5/8 X 7/8	955	0.07"	3.2
P312-STD1	16 X 16 X 1	15-7/8 X 15-7/8 X 7/8	535	0.07"	1.8
P312-STD1	16 X 18 X 1	15-7/8 X 17-7/8 X 7/8	590	0.07"	2.0
P312-STD1	16 X 20 X 1	15-7/8 X 19-5/8 X 7/8	665	0.07"	2.2
P312-STD1	16 X 24 X 1	15-7/8 X 23-3/4 X 7/8	800	0.07"	2.7
P312-STD1	16 X 25 X 1	15-7/8 X 24-5/8 X 7/8	835	0.07"	2.8
P312-STD1	16 X 30 X 1	15-7/8 X 29-7/8 X 7/8	1000	0.07"	3.3
P312-STD1	18 X 18 X 1	17-7/8 X 17-7/8 X 7/8	675	0.07"	2.3
P312-STD1	18 X 20 X 1	17-7/8 X 19-5/8 X 7/8	750	0.07"	2.5
P312-STD1	18 X 24 X 1	17-7/8 X 23-3/4 X 7/8	900	0.07"	3.0
P312-STD1	18 X 25 X 1	17-7/8 X 24-5/8 X 7/8	940	0.07"	3.1
P312-STD1	18 X 30 X 1	17-7/8 X 29-7/8 X 7/8	1125	0.07"	3.8
P312-STD1	20 X 20 X 1	19-5/8 X 19-5/8 X 7/8	835	0.07"	2.8
P312-STD1	20 X 22-1/4 X 1	19-5/8 X 22-1/4 X 7/8	925	0.07"	3.1
P312-STD1	20 X 24 X 1	19-5/8 X 23-3/4 X 7/8	1000	0.07"	3.3
P312-STD1	20 X 25 X 1	19-5/8 X 24-5/8 X 7/8	1040	0.07"	3.5
P312-STD1	20 X 30 X 1	19-5/8 X 29-7/8 X 7/8	1250	0.07"	4.2
P312-STD1	22 X 22 X 1	21-15/16 X 21-15/16 X 7/8	1010	0.07"	3.4
P312-STD1	24 X 24 X 1	23-3/4 X 23-3/4 X 7/8	1200	0.07"	4.0
P312-STD1	24 X 30 X 1	23-3/4 X 29-7/8 X 7/8	1500	0.07"	5.0
P312-STD1	25 X 25 X 1	24-5/8 X 24-5/8 X 7/8	1300	0.07"	4.3
P312-STD2	10 X 20 X 2	9-5/8 X 19-5/8 X 1-5/8	415	0.07"	1.4
P312-STD2	12 X 24 X 2	11-3/8 X 23-3/8 X 1-5/8	600	0.07"	2.0
P312-STD2	14 X 20 X 2	13-5/8 X 19-5/8 X 1-5/8	585	0.07"	1.9
P312-STD2	14 X 25 X 2	13-5/8 X 24-5/8 X 1-5/8	730	0.07"	2.4
P312-STD2	15 X 20 X 2	14-5/8 X 19-5/8 X 1-5/8	625	0.07"	2.1
P312-STD2	16 X 16 X 2	15-5/8 X 15-5/8 X 1-5/8	535	0.07"	1.8
P312-STD2	16 X 20 X 2	15-5/8 X 19-5/8 X 1-5/8	665	0.07"	2.2
P312-STD2	16 X 24 X 2	15-5/8 X 23-5/8 X 1-5/8	770	0.07"	2.6
P312-STD2	16 X 25 X 2	15-5/8 X 24-5/8 X 1-5/8	835	0.07"	2.8
P312-STD2	18 X 24 X 2	17-5/8 X 23-5/8 X 1-5/8	900	0.07"	3.0
P312-STD2	20 X 20 X 2	19-5/8 X 19-5/8 X 1-5/8	835	0.07"	2.8
P312-STD2	20 X 24 X 2	19-5/8 X 23-5/8 X 1-5/8	1000	0.07"	3.3
P312-STD2	20 X 25 X 2	19-5/8 X 24-5/8 X 1-5/8	1040	0.07"	3.5
P312-STD2	20 X 30 X 2	19-3/4 X 29-3/4 X 1-5/8	1250	0.07"	4.2
P312-STD2	20 X 35 X 2	19-1/2 X 34-1/2 X 1-5/8	1460	0.07"	4.9
P312-STD2	24 X 24 X 2	23-3/8 X 23-3/8 X 1-5/8	1200	0.07"	4.0
P312-STD2	25 X 25 X 2	24-3/8 X 24-3/8 X 1-5/8	1300	0.07"	4.3

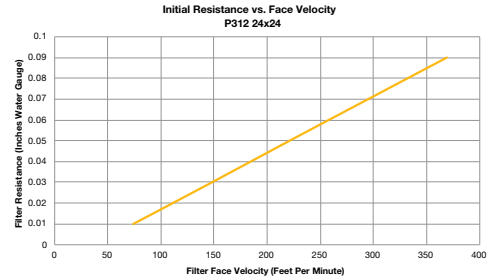

**NOTES:**

1. Testing per ASHRAE Standard 52.2-2017. Performance based on 295 FPM face velocity for a 24x24 face size.
2. MERV < 5
3. Rated face velocity 500 FPM.
4. Recommended final resistance 1" depth 0.50" W.G.
5. Recommended final resistance 2" depth 1.00" W.G.
6. Maximum Operating Temperature 200°F (93°C).
7. Classified per UL 900 for flammability.



Parker Hannifin Corporation  
**HVAC Filtration Division**  
 100 River Ridge Circle  
 Jeffersonville, Indiana 47130  
 phone 866 247 4827  
[www.parker.com/HVAC](http://www.parker.com/HVAC)



**WARNING:** This product can expose you to chemicals, including chromium, styrene, which are known to the State of California to cause cancer, and lead, which are known to the State of California to cause birth defects and other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**ENGINEERING YOUR SUCCESS.**