V02 USEM pg 1 English

VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	T63CRE-2190	USEM	D34CP2PCR	11.358	-------	-------	2.915	3/4	115/230	1.25	7.0/3.5	60	1725	230	NONE	NO BASE
002	T63CRM-2197	USEM	D32CP2PCR	12.358	-------	-------	3.915	1 1/2	115/230	1.15	13.4/6.7	60	1725	230	NONE	NO BASE

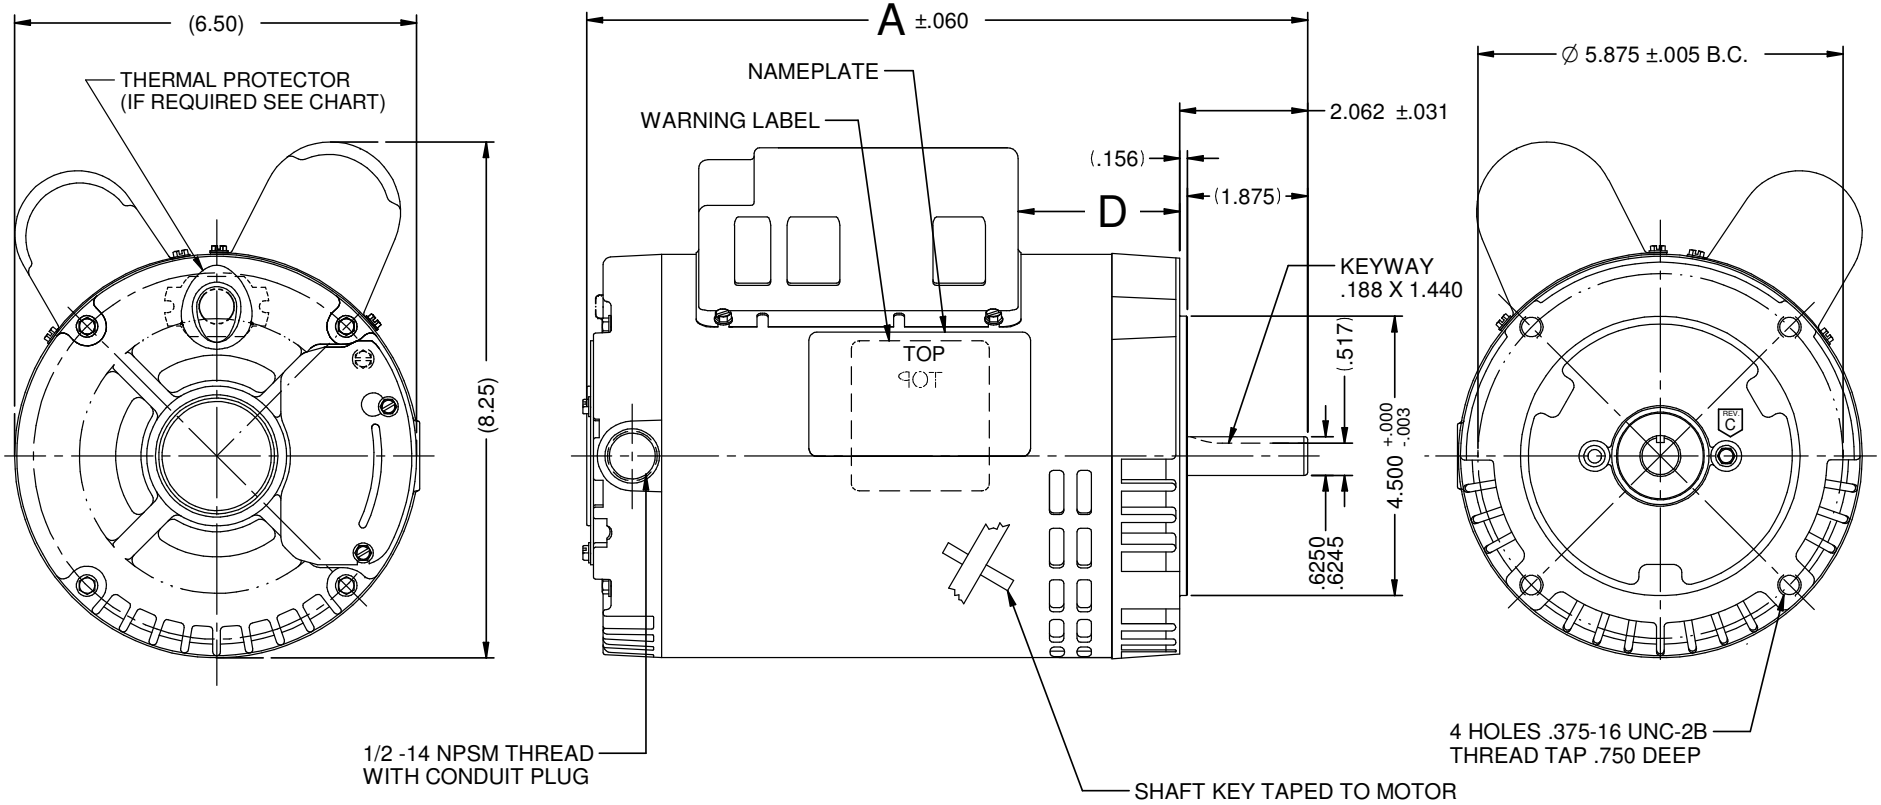

NIDEC MOTOR CORPORATION 09-Oct-18

MOTOR IS CCW ROTATION LEAD END, TO REVERSE ROTATION INTERCHANGE RED AND BLACK LEADS.

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: ECO: E31480

UPDATED VIEW OF THE MACHINE SCREW FOR BEARING LOCK TAB, WITHOUT SLOT.

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)

INCHES	mm
.XX = ± .010 .XXX = ±.005	

ANGLES X°= ±1°

NIDEC MOTOR CORPORATION

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSEDWITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

REVISION DATE : 09-OCT-18

ISSUED BY :	ENGINEER APPROVED :	TITLE	CODE	ITEM NO.	REV	SHEET NUMBER	DWG SIZE
R. GUZMAN	J. SALINAS	CUSTOMER DETAIL DRAWING	V02	804547	C	1 OF 6	B

V02_NMCB (MAR-2014)

SOLIDEDGE