



MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER P.N.	DESCRIPTION / REMARKS
K55HXMMY-0598	A24947	WHOLESALE	1/6	460	0.5	60	825	CCW LEAD END	1412	K55 BALL BRG. ENCLOSED

16 GREEN / YELLOW GROUND LEAD TO BE 6.000±.250 BETWEEN CENTERS OF TERMINALS

TERMINAL TO FIT 5/16" STUD AMP # 42752 - 2 OR EQUIV.

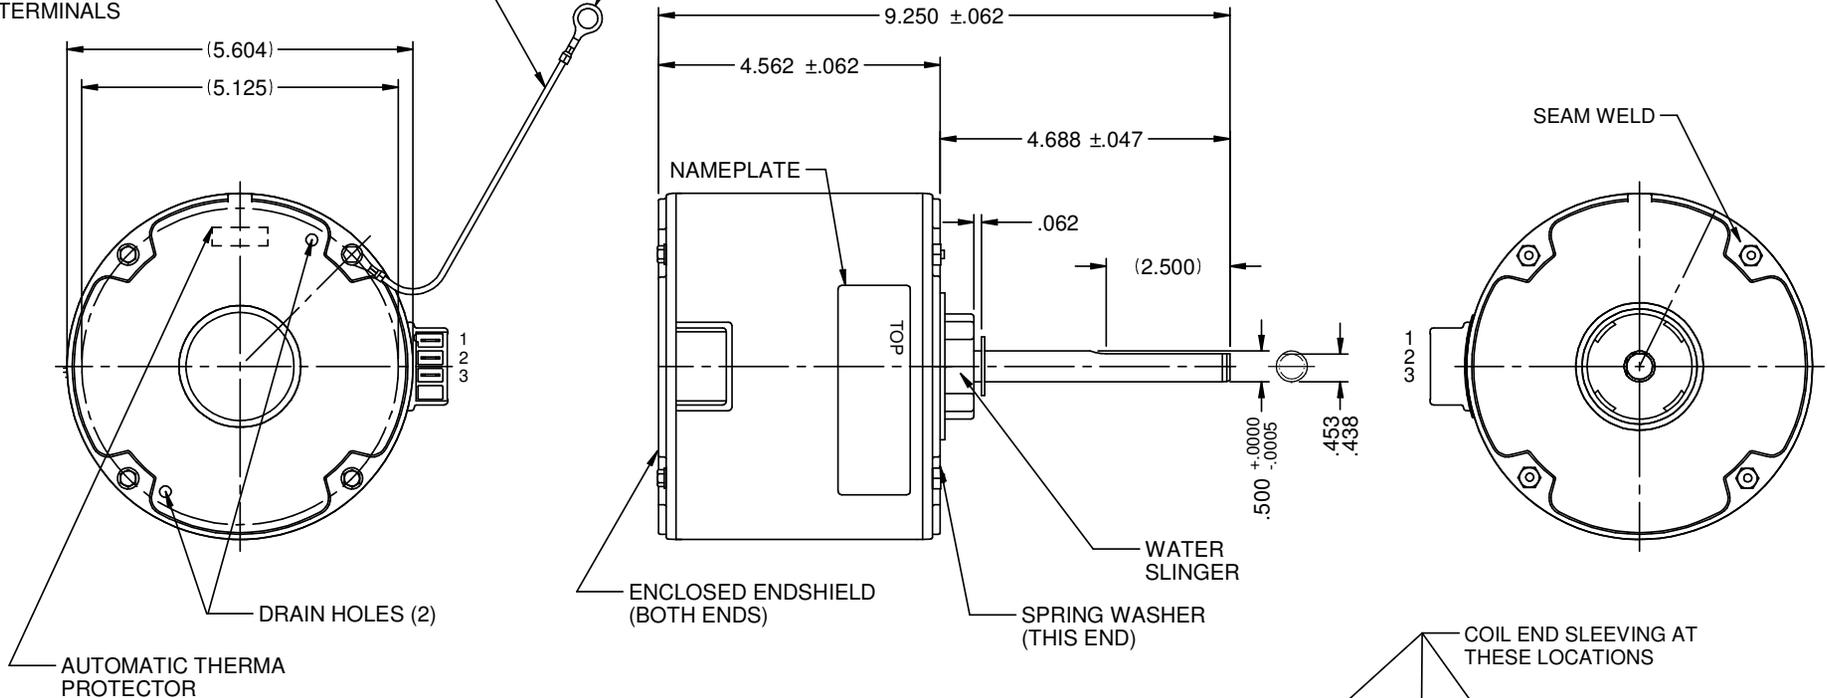

FIRST POLE OF MAIN 1 (FIRST HALF) TO BE SEPARATED FROM LAST POLE OF MAIN 1 (SECOND HALF) BY A MINIMUM OF .094 ON BOTH ENDS OF STATOR

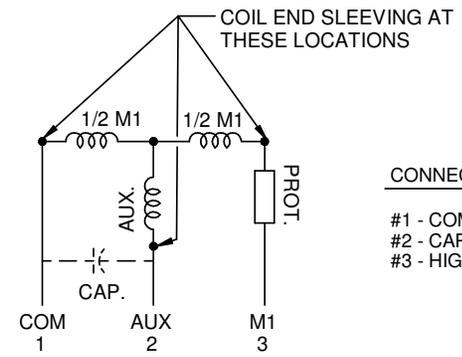

CONNECTIONS
 #1 - COMMON
 #2 - CAP
 #3 - HIGH

NIDEC MOTOR CORPORATION 19-Aug-15

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:	ECO-E23657
DELETED NOTE THE ROTATION	
ISSUED BY:	C.ALMAGUER
ENGINEER APPROVED:	J.SALAZAR

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)	
INCHES .XX = ±.010 .XXX = ±.005	mm
ANGLES X° = ±1°	

NIDEC MOTOR CORPORATION			
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			REVISION DATE: 19-AUG-15
TITLE	CODE	ITEM NO.	REV
CUSTOMER DETAIL DRAWING	V02	806352	A
		SHEET NUMBER	DWG SIZE
		1 OF 3	B