



Submittal Data Information

0026^e™

ECM High-Efficiency Circulator

101-194

Effective: February 1, 2021

Supersedes: NEW

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	

Specifications

- Maximum Shut-off Head: 26 feet
- Maximum Flow: 44 gpm
- Maximum Operating Pressure: 150 psi (10.3 bar)
- Maximum Water Temp: 230°F (110°C)
- Minimum Water Temp: 14°F (-10°C)
- Electrical specifications:
 - Voltage: 115V/208/230, 50/60 Hz Single phase
 - Operating Power Range: 10 - 120W
 - Max. AMP Rating: 1.0 (115V) - 0.50 (230V)
- Equipped with a Cast Iron or Stainless Steel casing
- Suitable for chilled water systems
- Stainless Steel model suitable for open loop potable water systems
- Taco circulators are for indoor use only
- Acceptable for use with water or maximum of 50% water/glycol solution

Materials of Construction:

Casing:Cast Iron or Stainless Steel

Stator Housing:Composite

Control Base:Composite

Control Cover:Composite

Cartridge:Composite

Impeller:Composite

Shaft:Ceramic

Rotor:Neodymium

Bearings:Ceramic

Thrust Bearing:Carbon


O-Ring & Gaskets:EPDM

Applications

Cast Iron Model: Closed loop, pressurized heating and chilled water HVAC systems.

Stainless Steel Model: Open loop, potable water systems.

The 0026e is a high-performance, variable speed, wet-rotor circulator with high-efficiency ECM permanent magnet technology. With 5 easy settings, its variable speed performance curves are equivalent to the Taco 0010, 0011, 0012, 0012 3-Speed & 0014. Ideal for large residential and light commercial hydronic heating, chilled water cooling and domestic hot water systems. The 0026e reduces power consumption by up to 85% compared to equivalent AC permanent split capacitor circulators.

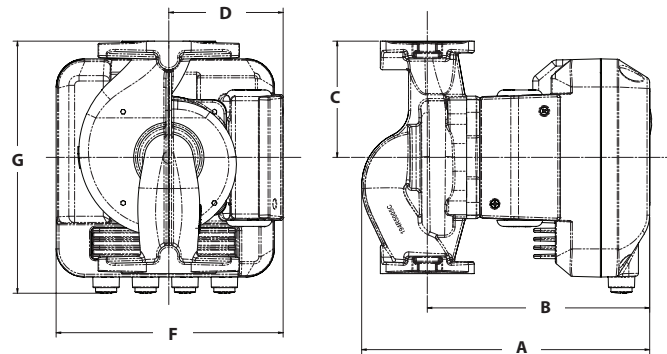


Pump Dimensions & Weights

Model Number Part Number	Casing	Flange Type	A	B	C	D	F	G	Wt.lbs. [kg]
Inches [mm]									
0026e-F2 VM2644-HD1-RC2A00	Cast Iron	R	8.05" [205]	6.22" [158]	3.25" [83]	3.20" [81]	6.22" [158]	7.05" [179]	10.5 [4.8]
0026e-SF2 VM2644-DD1-RS2A00	Stainless Steel								

Electrical Data


Model	Volts	Hz	Ph	Max Amps	Watts	RPM
All Models	115/208/230	50/60	1	1	120	830 - 3800
Motor Type	ECM, Permanent Magnet, Electronically Protected					

Flange Orientation



Rotated (R)

Rotatable Control Cover to allow mounting in any orientation




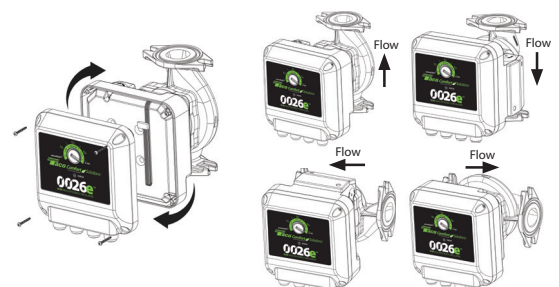


Certified to
NSF/ANSI 61 & 372

Stainless
Steel Model





activeADAPT® Mode:

activeADAPT is an operating mode designed for constant circulation systems. On this setting, the circulator will sense changes in system flow and head conditions and adjust the operating curve automatically.

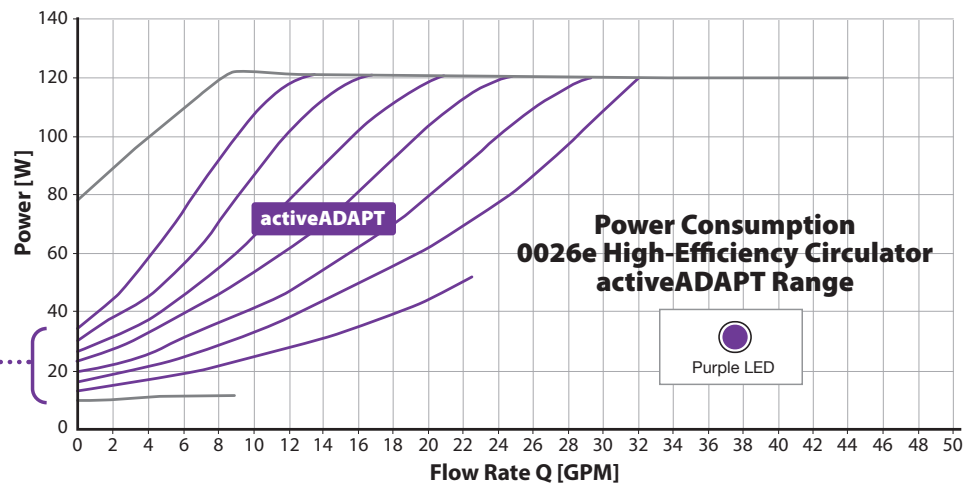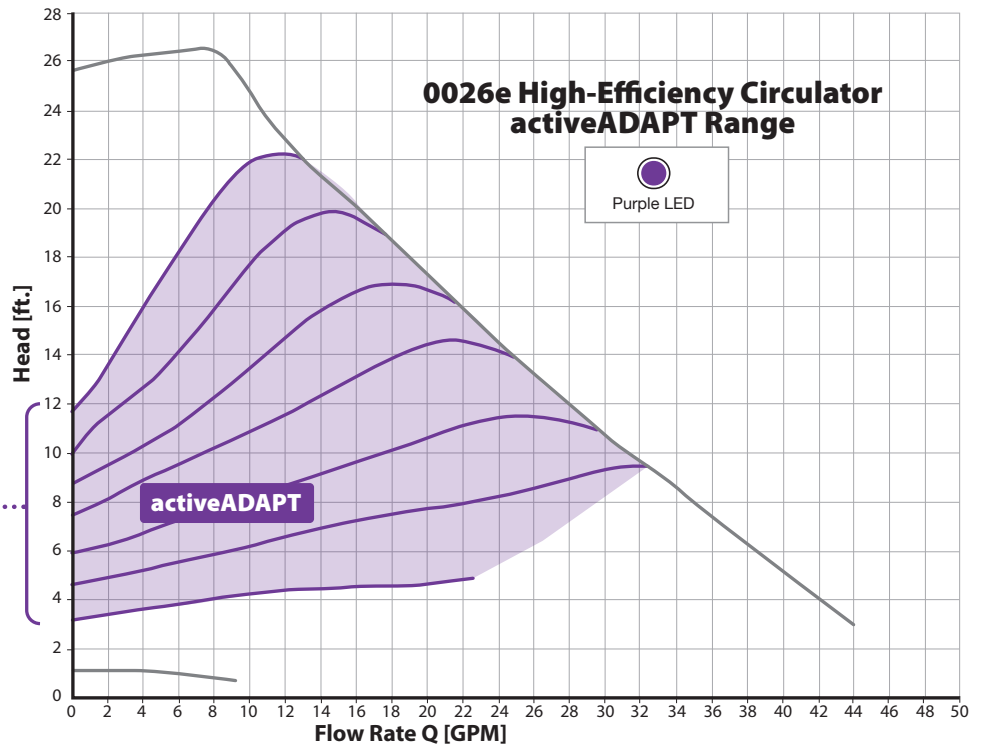





Constant Pressure Mode:

At Low setting the circulator will vary speed to maintain 8 feet of head constant pressure. At Medium setting the circulator will vary speed to maintain 16 feet of head constant pressure.

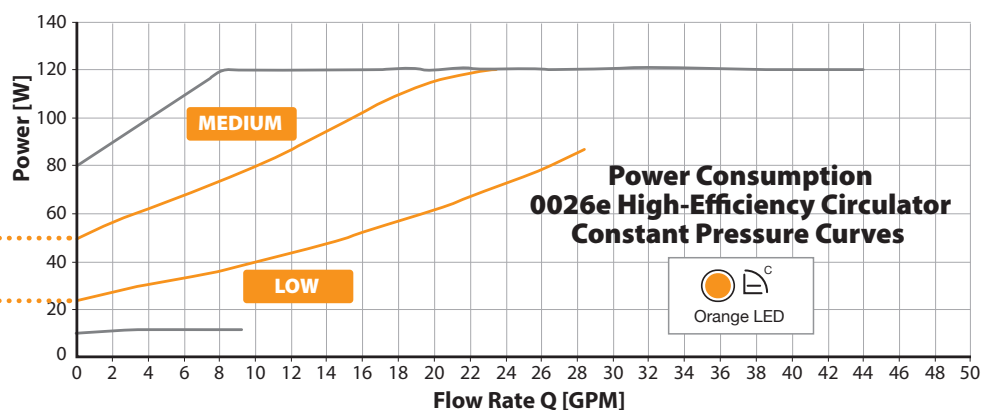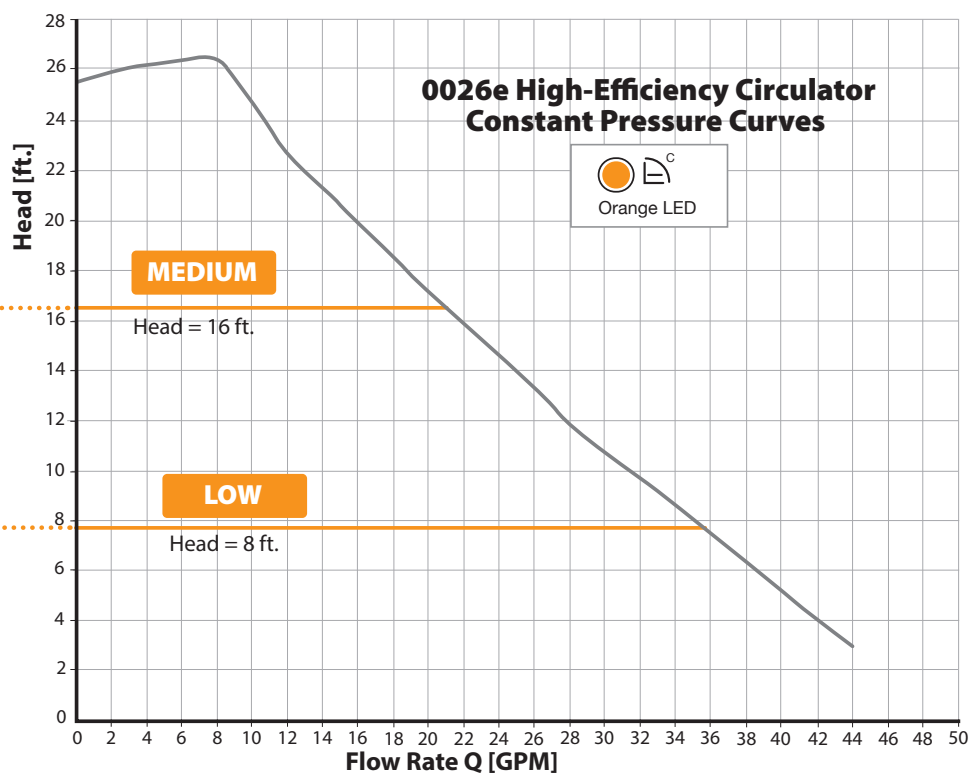


Fixed Speed Mode:

At High setting the circulator always operates at full speed.

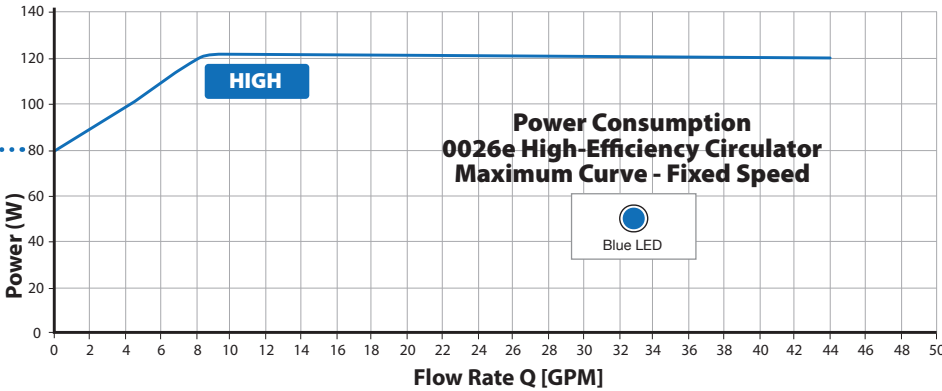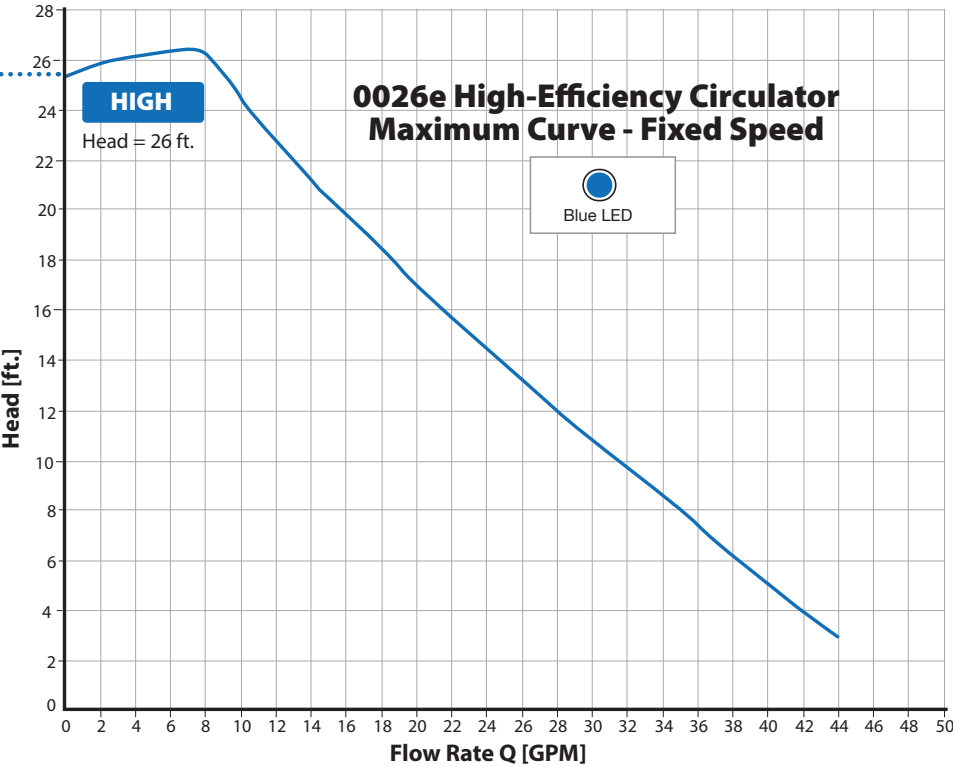


0-10V DC or PWM External Input:

The circulator will vary its speed and performance based on a 0-10V DC analog or PWM digital signal external input.




0-10V

PWM (Pulse Width Modulation)

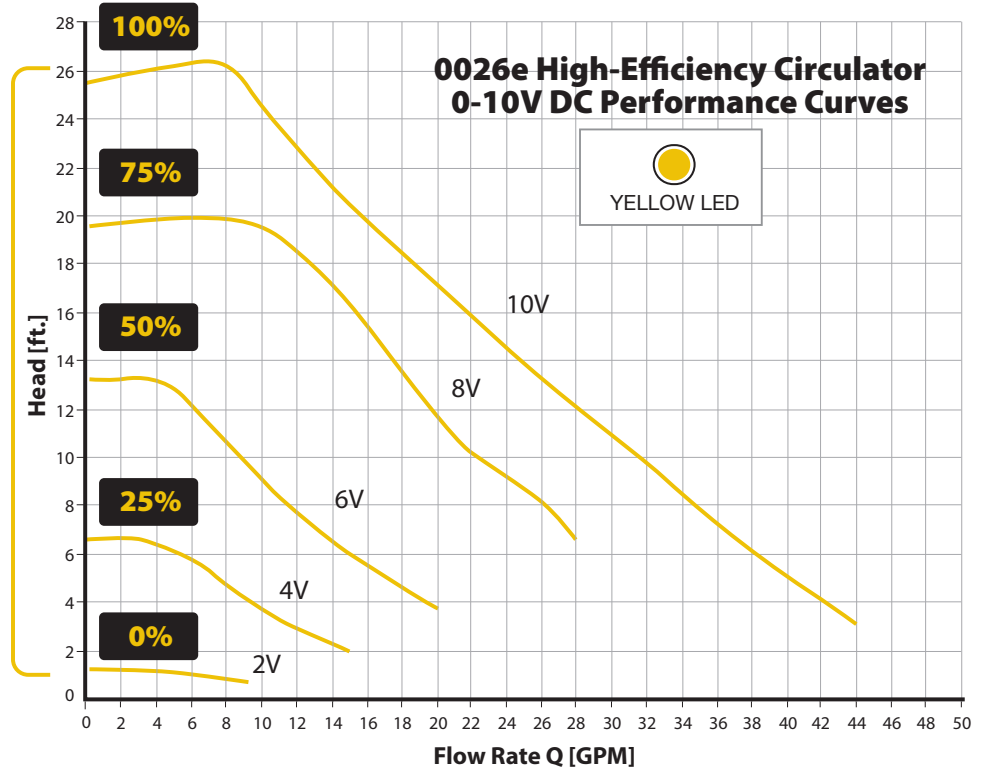

0-10V

Power Consumption 0026e High-Efficiency Circulator 0-10V DC Curves

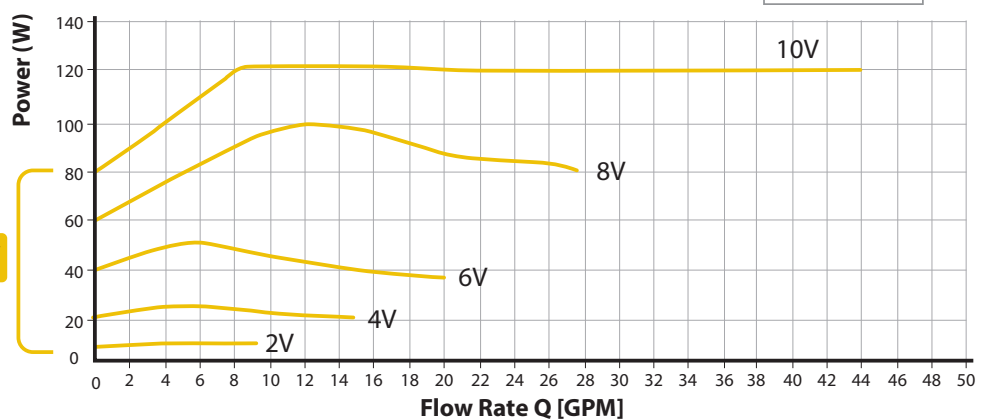

Taco Comfort Solutions® A Taco Family Company

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | ©2021 Taco, Inc.

