




F1960 POLY PEX MANIFOLD WITH CLOSED END

- Simple and dependable plumbing connection
- Easy installation
- Leak-proof connections
- Polymer construction
- Manufactured of premium grade resin with non-mixed blends
- Can be used with F1960 PEX rings
- 1/2" branch outlets
- Tested and certified to ASTM F1960 and ASTM F877-2020
- Certified to NSF/ ANSI/CAN 61-2018, NSF/ANSI 14-2016, and NSF/ANSI 372-2011
- Certified to CSA B137.5-2020 and CSA B137.5-2017
- cUPC listed
- Certified to NSF

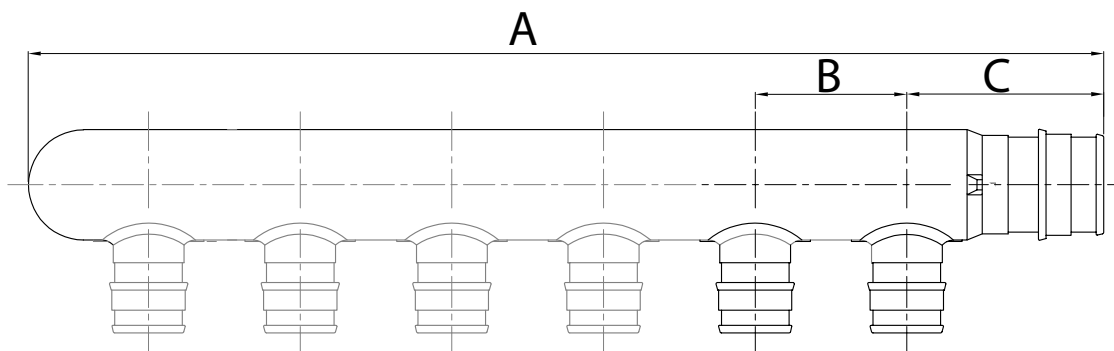

Part No.	Description	A - in (mm)	A Tolerance ± in (mm)	B - in (mm)	B Tolerance ± in (mm)	C - in (mm)	C Tolerance ± in (mm)	Weight lbs (grams)	Tolerance lbs (grams)
F76003	3/4" F1960, 6-Port with Closed End	8.772 (222.809)	0.342 (8.687)	1.220 (30.988)	0.030 (0.762)	1.674 (42.507)	0.134 (3.91)	0.16 (73.94)	0.02 (9.07)
F76004	3/4" F1960, 4-Port with Closed End	6.339 (161.011)	0.279 (7.087)	1.220 (30.988)	0.030 (0.762)	1.674 (42.507)	0.134 (3.391)	0.12 (54.43)	0.01 (2.27)
F76005	3/4" F1960, 3-Port with Closed End	5.119 (130.023)	0.249 (6.325)	1.220 (30.988)	0.030 (0.762)	1.674 (42.507)	0.134 (3.391)	0.08 (36.29)	0.01 (2.27)
F76008	1" F1960, 6-Port with Closed End	8.73 (221.70)	-	1.19 (30.20)	-	1.78 (45.20)	-	0.12 (54.43)	-
F76009	1" F1960, 4-Port with Closed End	6.35 (161.30)	-	1.19 (30.20)	-	1.78 (45.20)	-	0.12 (54.43)	-

F1960 Specified Dimensions	ID - in (mm)	OD - in (mm)
1/2" End Connection	.40 (10.20)	.61 (15.59)
3/4" End Connection	.61 (15.60)	.87 (22.10)
1" End Connection	.82 (20.80)	1.11 (28.10)