

For Residential Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

G2CP04X/14X 1/4 Turn Straight Stop Press Connect x Compression


Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:

- **Chrome Finish**
- **Fast, reliable, and secure** connection
- **Compatible with copper**
- **Easy-to-remove handle** protects against accidental operation during rough-ins
- **One-piece brass body** for strength and durability
- **Positive 1/4 turn shut off** provides easy on/off flow control
- **Connections** can be made on both wet and dry systems
- **Chrome plated brass ball** provides corrosion resistance and smooth operation
- **100% leak tested** to ensure reliable, leak-free performance

Operating Specifications:

Temperature: 40° - 160° F
Pressure: 125 PSI maximum

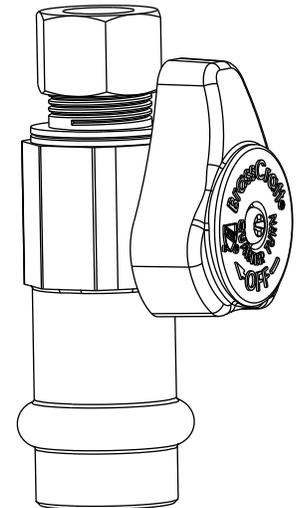

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Ball	Brass, plated
Stem	Brass
Stem O-ring	EPDM
Seats	PTFE
Press Connect O-ring	EPDM
Handle	ABS, plated
Screw	Stainless steel
Compression Nut	Brass, plated
Compression Sleeve	Brass



Part Listing:

- G2CP04X C1 1/2" nom press connect x 1/4" OD compression, chrome plated, window box
- G2CP14X C1 1/2" nom press connect x 3/8" OD compression, chrome plated, window box

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIM. C
G2CP04X	2.73	1.42	1.09
G2CP14X	2.65	1.42	1.09

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

G2CP04X/14X 1/4 Turn Straight Stop Press Connect x Compression

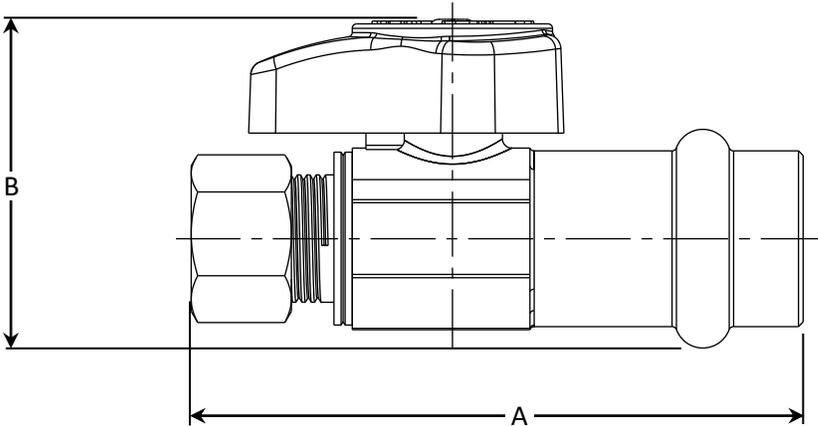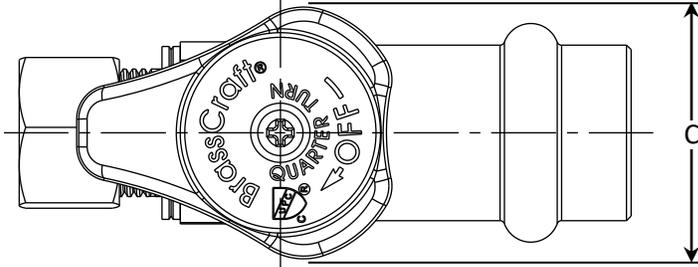

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.