

## Compact Wall (14,000 BTU) Indoor Unit For Heat-recovery/Heat-pump Airstage VRF System

Job Name \_\_\_\_\_  
Location \_\_\_\_\_  
Engineer \_\_\_\_\_  
Submitted To \_\_\_\_\_  
Submitted By \_\_\_\_\_  
Reference \_\_\_\_\_

Date \_\_\_\_\_  
Approval \_\_\_\_\_  
Construction \_\_\_\_\_  
Unit No \_\_\_\_\_  
Drawing No \_\_\_\_\_

### FEATURES

- Powerful output in a compact design
- Built-in deodorizing and ionizing filters for better air quality
- Auto swing louvers
- Very low power usage
- 10 year Extended Warranty on parts and compressor. See Warranty Statement.
- Compatible with 2-wire remotes only



### CAPACITY

Capacity - Cooling - Btu/h [kW]	14,000 [4.1]
Capacity - Heating - Btu/h [kW]	15,600 [4.6]

### PIPING ACCESSORIES

UTP-AX090A	Separation Tube - 2-Pipe - 90 MBH or Less
UTP-AX180A	Separation Tube - 2-Pipe - 91 to 180 MBH
UTP-AX567A	Separation Tube - 2-Pipe - 180 MBH or More

### CONTROLLER

UTY-RNRUZ4	Individual Touch Panel Controller (Wired Remote)
UTY-RSRY	Simple Remote (WITH Master Control) 2-Wire
UTY-RHRY	Simple Remote (WITHOUT Master Control) 2-Wire
UTY-LNHU	Wireless Remote Controller
UTY-DCGY	Central Remote Controller (100 units)
UTY-DTGYZ1	Touch Panel Controller with Internet (400 units)

### ELECTRICAL

Power Source	208 / 230V, 1-Phase, 60Hz
Available Voltage Range - VAC	187 to 253
Input Power - W	36
Full Load Amps - FLA - A	0.39
Max Circuit Breaker - A	15
Minimum Circuit Ampacity - MCA - A	0.49

### FAN

Fan Type	Cross flow x 1
Airflow Rate - High   Medium High - CFM [m³/h]	471 [800]   436 [740]
Airflow Rate - Medium   Medium Low - CFM [m³/h]	400 [680]   359 [610]
Airflow Rate - Low   Quiet - CFM [m³/h]	324 [550]   194 [330]

### SOUND PRESSURE

Sound Pressure Level - dB(A)	24/34/37/40/42/44
------------------------------	-------------------

### WIRING

Communication Cable	LonWorks (Fujitsu Pink Cable. See AE Bulletin 009)
---------------------	--

### PIPING

Connection Pipe Diameter - Liquid (Brazing) - in [mm]	ø 1/4 [6.35]
Connection Pipe Diameter - Gas (Brazing) - in [mm]	ø 1/2 [12.70]
Connection Pipe Diameter - Drain (ID; OD) - in [mm]	ø 9/16 [14.3]
Drain-Pump	Optional

### ETL

E.T.L.	91986
--------	-------

### TEMPERATURE RANGES

Operating Temp. Cooling (DB) - °F [°C]	64 to 88 [18 to 31]
Operating Temp. Heating (DB) - °F [°C]	50 to 88 [10 to 31]


Note: Specifications are based on the following conditions:  
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB.  
Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).

FUJITSU GENERAL AMERICA, INC.  
340 Changebridge Rd.  
Pine brook, NJ 07058  
Toll Free: (888) 888-3424  
Fax: (973) 836-0453  
www.airstagevrf.com

Compact Wall (14,000 BTU) Indoor Unit  
For Heat-recovery/Heat-pump Airstage VRF System

**DIMENSIONS**

Unit: In. (mm)

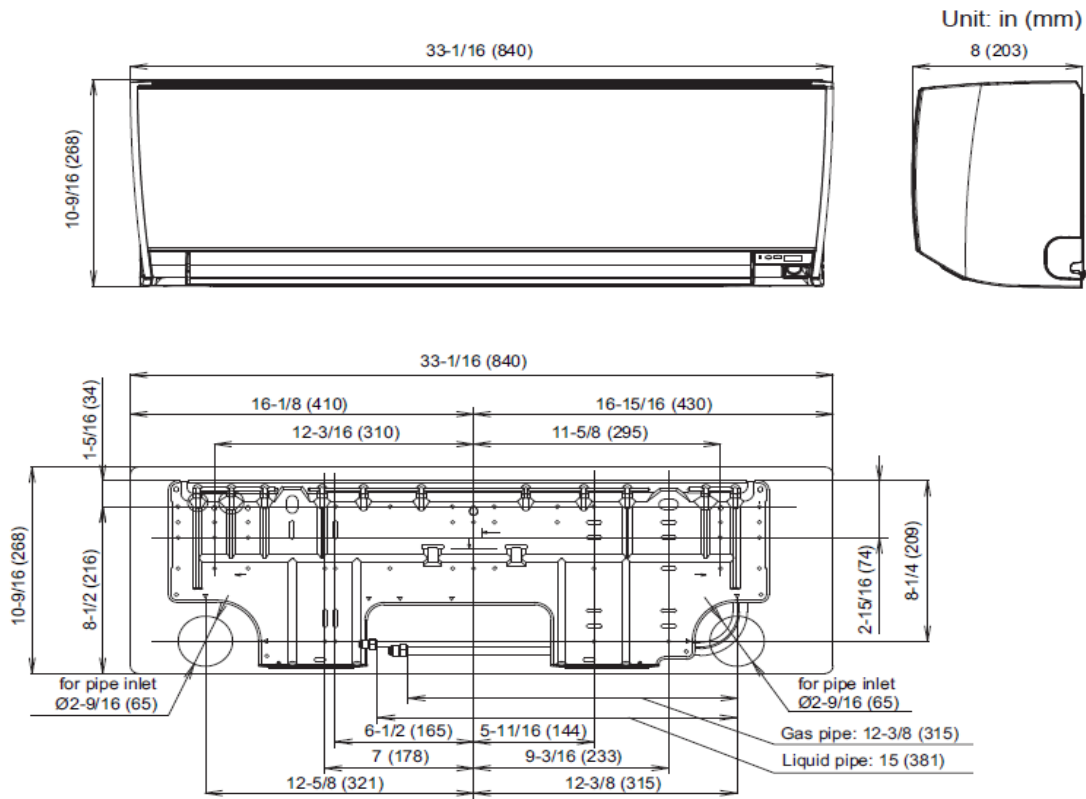

FUJITSU GENERAL AMERICA, INC.  
340 Changebridge Rd.  
Pine brook, NJ 07058  
Toll Free: (888) 888-3424  
Fax: (973) 836-0453  
[www.airstagevrf.com](http://www.airstagevrf.com)