AIR AND WATER PRESSURE GAUGE



Figure 1501




FEATURES & BENEFITS

- Specially designed for fire sprinkler systems
- Suitable for air and all fluid media that will not obstruct the connection port or corrode alloy parts
- 0-300 psi
- 1/4" NPT connection, bottom
- Window: Screw-on clear polycarbonate

TECHNICAL DATA

- Ambient/Process temperature limits: -40°F to 150°F (-40°C to 65°C)
- Welding: Silvery alloy
- Working pressure: Maximum 75% of full scale value
- UL listed and FM approved

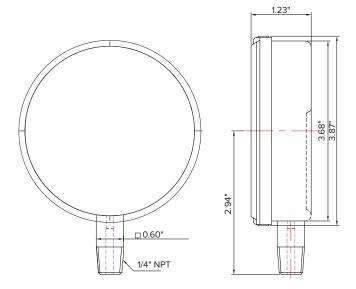

MATERIAL CHART

| PART NAME | MATERIAL |
|--------------|-------------------------------------------------|
| Case | Keyuan L870 PBT-TC (Black Plastic) |
| Dial | Galvalume steel (Aluminum-zinc alloy coated) |
| Lens | Polycarbonate |
| Tube | Phosphor Bronze |
| Socket | Brass |
| Welding | Silver Alloy |





Not approved for potable water applications