

# SIGHT GLASS



Figure 1301




NFP130101G

## FEATURES & BENEFITS

- Size: 1" IPS with 1/2" orifice
- Includes a sight window on either side so that flow can be accurately viewed
- Finish: Rough brass

## INSTALLATION

Apply a suitable thread sealant to the threads. This sight glass must be installed so the direction of flow matches the arrow on the brass body. This allows the restricted stream to be viewed through the sight. DO NOT OVER TIGHTEN. Over-tightening may cause cracks or deformities which could lead to failure.

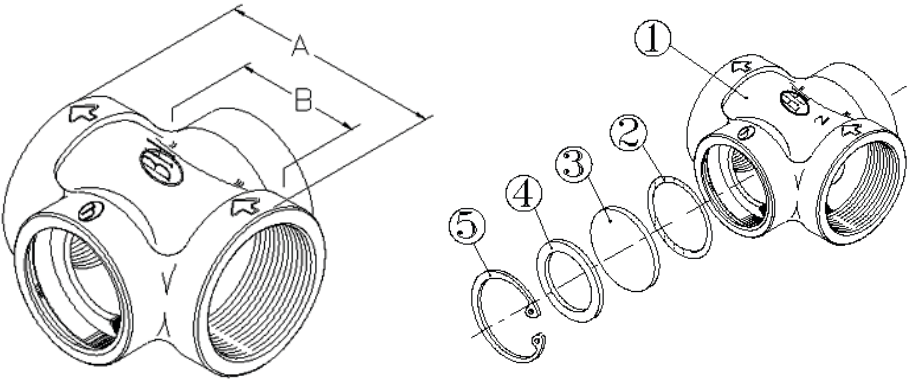

## MATERIAL CHART

| NO. | PART NAME   | MATERIAL          |
|-----|-------------|-------------------|
| 1   | Body        | Brass ASTM C85700 |
| 2   | O-Ring      | NBR               |
| 3   | Clear Plate | Acrylic           |
| 4   | Washer      | Brass             |
| 5   | Buckle      | 304 SS            |

## DIMENSION (INCHES)

| PART #     | SIZE | THREAD      | A      | B  | ORIFICE SIZE |
|------------|------|-------------|--------|----|--------------|
| NFP130101G | 1"   | FNPT x FNPT | 3-1/4" | 2" | 1/2"         |

\*Not for use in potable systems  
This device should be installed on discharge side of drain valve (not for system static pressure).