


# Compact Cassettes 7, 9, 12, and 18,000 BTUs

AUU7RLF, AUU9RLF, AUU12RLF, AUU18RLF

## Easy Installation

Fits into a standard ceiling tile\*.

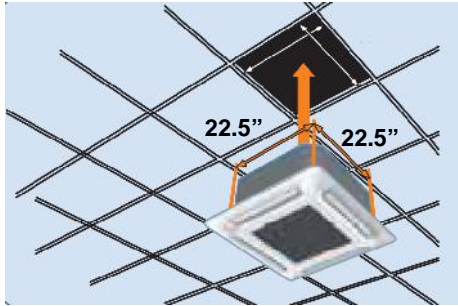


\*Dimensions of outer grille are 27-9/16" x 27-9/16" and may overlap adjacent tiles.



## 2-Stage Turbo Fan

Air distribution is evenly spread across the heat exchanger by the new 2 stage turbo fan which produces two separate airflow streams.

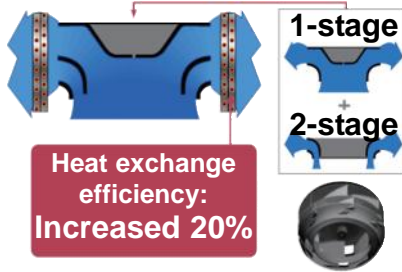

## Standard Features

- Sleep Timer
- Dry Mode
- Auto Louver: Up/ Down
- Quiet Mode
- Auto Restart/Reset
- Auto Changeover
- Remote Temperature Sensor
- High Ceiling Mode
- Condensate Pump
- 2-Stage Turbo Fan
- Minimum Heat Mode+
- Fresh Air Intake\*\*

+ Available only with optional wireless remote control.

\*\*Requires Fujitsu's Optional Fresh Air Kit part #UTZ-VXAA. Allows for a 4-inch flex duct connection and a field supplied duct booster fan. Fresh air maximum is 10% of unit High fan CFM. See UTZ-VXAA Design and Technical Manual for fan static pressure requirements at Fresh Air Kit. Add hood, filter and duct losses for fan total static pressure requirements. Will add 4" to the height of the indoor unit.

\* Compact Cassette Grille UTG-CCGF sold separately. Must order one with each compact cassette.

## AUU7RLF AUU9RLF AUU12RLF AUU18RLF

Heat Pump Heat Pump Heat Pump Heat Pump

**NEW!**

|  | AUU7RLF                 | AUU9RLF                 | AUU12RLF                | AUU18RLF                             |
|--|-------------------------|-------------------------|-------------------------|--------------------------------------|
| Nominal Cooling BTU/h                    | 7,000                   | 9,000                   | 12,000                  | 18,000                               |
| Nominal Heating BTU/h                    | 8,100                   | 10,200                  | 13,500                  | 20,000                               |
| Voltage/Frequency/Phase                  | 208-230/60/1            | 208-230/60/1            | 208-230/60/1            | 208-230/60/1                         |
| Air Circ. C.F.M. (m <sup>3</sup> /h): Hi | 318 (540)<br>Clg or Htg | 318 (540)<br>Clg or Htg | 359 (610)<br>Clg or Htg | 441 (750)<br>Clg<br>471 (800)<br>Htg |
| Medium                                   | 288 (490)<br>Clg or Htg | 288 (490)<br>Clg or Htg | 312 (530)<br>Clg or Htg | 359 (610)<br>Clg<br>418 (710)<br>Htg |
| Low                                      | 259 (440)<br>Clg or Htg | 259 (440)<br>Clg or Htg | 277 (470)<br>Clg or Htg | 306 (520)<br>Clg<br>353 (600)<br>Htg |
| Quiet                                    | 230 (390)<br>Clg or Htg | 230 (390)<br>Clg or Htg | 241 (410)<br>Clg or Htg | 241 (410)<br>Clg<br>265 (450)<br>Htg |
| Noise Level dB(A) Clg/Htg: Hi            | 33/34                   | 33/34                   | 37/37                   | 42/44                                |
| Medium                                   | 31/32                   | 31/32                   | 33/33                   | 37/40                                |
| Low                                      | 29/29                   | 29/29                   | 31/31                   | 33/37                                |
| Quiet                                    | 27/27                   | 27/27                   | 28/28                   | 29/30                                |
| Running Current Rated (A): Cooling       | 0.15                    | 0.15                    | 0.19                    | 0.30                                 |
| Heating                                  | 0.15                    | 0.15                    | 0.19                    | 0.30                                 |
| Power Use Rated/Max (W): Clg             | 18                      | 18                      | 23                      | 39                                   |
| Heating                                  | 18                      | 18                      | 23                      | 39                                   |
| Fan Speeds Stage                         | 4+auto                  | 4+auto                  | 4+auto                  | 4+auto                               |
| Air Direction: Vertical                  | Automatic               | Automatic               | Automatic               | Automatic                            |
| Air Filter                               | Washable                | Washable                | Washable                | Washable                             |
| Front Grille                             | UTG-CCGF*               | UTG-CCGF*               | UTG-CCGF*               | UTG-CCGF*                            |
| Connection Method                        | Flare                   | Flare                   | Flare                   | Flare                                |
| Conn. Pipe Diameter Inch                 | suc 3/8 dis 1/4         | suc 3/8 dis 1/4         | suc 3/8 dis 1/4         | suc 1/2 dis 1/4                      |
| Net Weight lbs. (kg)                     | 33 (15)                 | 33 (15)                 | 33 (15)                 | 33 (15)                              |
| Chassis Dim: Height Inch (mm)            | 9-11/16 (245)           | 9-11/16 (245)           | 9-11/16 (245)           | 9-11/16 (245)                        |
| Width Inch (mm)                          | 22-7/16 (570)           | 22-7/16 (570)           | 22-7/16 (570)           | 22-7/16 (570)                        |
| Depth Inch (mm)                          | 22-7/16 (570)           | 22-7/16 (570)           | 22-7/16 (570)           | 22-7/16 (570)                        |
| Grille Dim: Height Inch (mm)             | 1-15/16 (49)            | 1-15/16 (49)            | 1-15/16 (49)            | 1-15/16 (49)                         |
| Width Inch (mm)                          | 27-9/16 (700)           | 27-9/16 (700)           | 27-9/16 (700)           | 27-9/16 (700)                        |
| Depth Inch (mm)                          | 27-9/16 (700)           | 27-9/16 (700)           | 27-9/16 (700)           | 27-9/16 (700)                        |
| Refrigerant                              | R410A                   | R410A                   | R410A                   | R410A                                |



## Fresh Air Kit\*\* UTZ-VXAA

Mixes room air then passes through the heat exchanger.