

**Features**

- Modern, simplistic exposed thermostatic valve serves as a hub for shower controls.
- Mechanically controlled thermostatic mixing valve maintains outlet temperature throughout shower experience.
- Control panel includes adjustable temperature dial with integrated adjustable high-temperature limit feature and shower outlet on/off buttons.
- When pressed once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment.
- When pressed back in, water turns off and outlet button aligns with control plate surface; flow setting remains intact.
- 1/2" Universal NPT and direct sweat inlets.
- Requires a single-function rainhead, handshower, and hose (sold separately).

**Material**


- Premium material construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

**Installation**

- Valve is fully serviceable from control panel.

**Recommended Products/Accessories**



- K-26282 Round multifunction 2.5 gpm handshower
- K-26282-G Round multifunction 1.75 gpm handshower
- K-26284 Oval multifunction 2.5 gpm handshower
- K-26284-G Oval multifunction 1.75 gpm handshower
- K-26294 Oval 12" rainhead with Katalyst® technology
- K-9514 60" Shower Hose

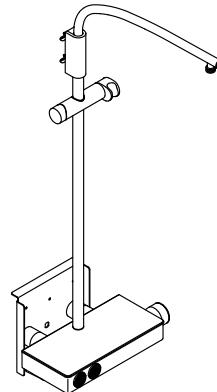**Codes/Standards**

None Applicable

**KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.

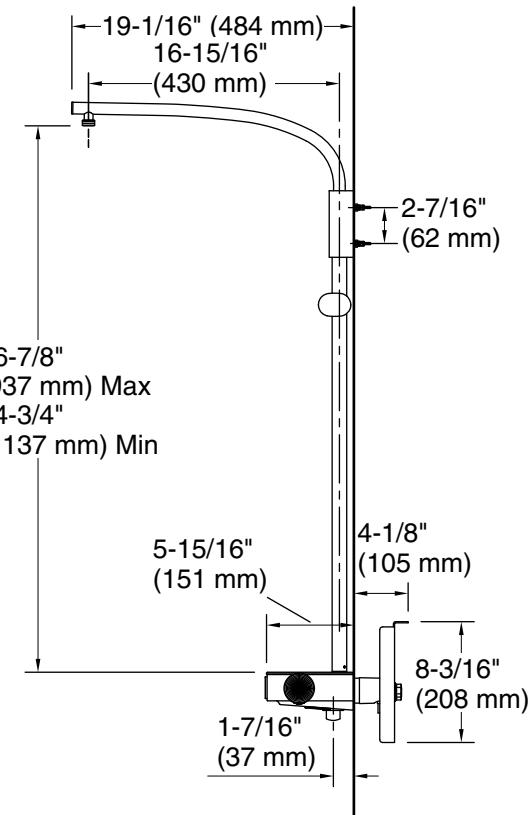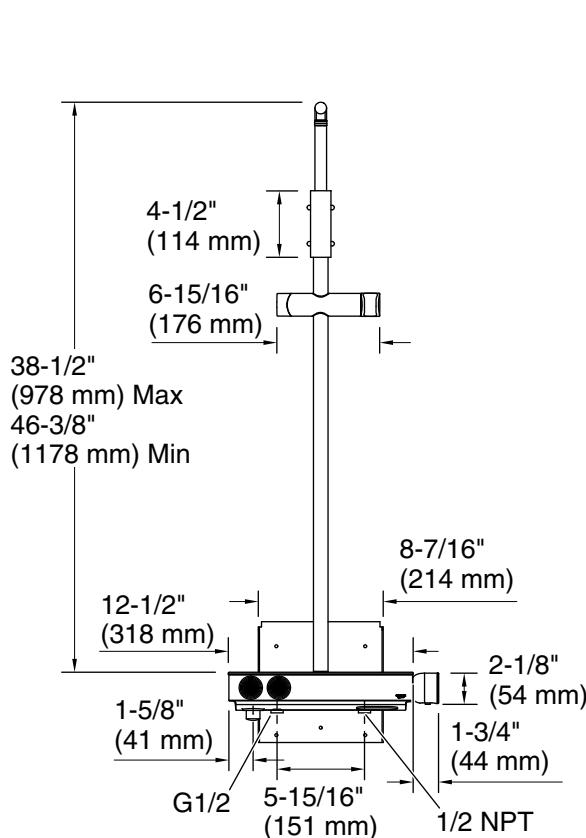

## Technical Information

All product dimensions are nominal.

### Shower Valve:

Flow Rate (Max) @ 45 psi	5 gal/min (18.9 l/min)
Manufacturer's minimum rated flow:	1.3 gal/min (4.9 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	20 psi (1.4 bar)
Drain included:	No