



Dexter™
Antimicrobial urinal with Mach® Tripoint®
flushometer
K-PR5016-T2HS

Features

- Fixture and touchless flushometer combination is engineered for optimal performance.
- Washout urinal.
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use.
- 0.5 gpf (1.9 lpf).
- 3/4" (19 mm) top spud.
- Flush valve activation distance is factory-set.
- No external flush volume adjustment ensures water conservation.
- 24-hour automatic sentinel flush keeps trapway fresh.
- Mechanical override enables flushometer to be used manually even during a power outage.
- Chloramine and chlorine resistance on all rubber components exposed to waterway.
- Locking stop cap provides protection against vandalism.
- 125-micron filter protects internal components.
- High back pressure vacuum breaker.
- Powered by a 30 year/875,000 cycle hybrid energy cell.
- For this combination, order K-5016-ETSS urinal and K-10UH00G20 flushometer.

Material

- Vitreous china urinal.
- Brass flush valve with durable Polished Chrome finish.

Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation.
- Patented piston technology for superior flush volume accuracy.

Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

Included Components

Additional Components:

- 2" outlet spud
- 3/4" inlet spud
- Hanger(s) (Qty 2)



ADA

Codes/Standards



ASME A112.18.1/CSA B125.1
ASME A112.19.2/CSA B45.1
ASSE 1037/ASME A112.1037/CSA B125.37
DOE - Energy Policy Act 1992
EPA WaterSense®
ADA
ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.



Dexter™
Antimicrobial urinal with Mach® Tripoint®
flushometer
K-PR5016-T2HS

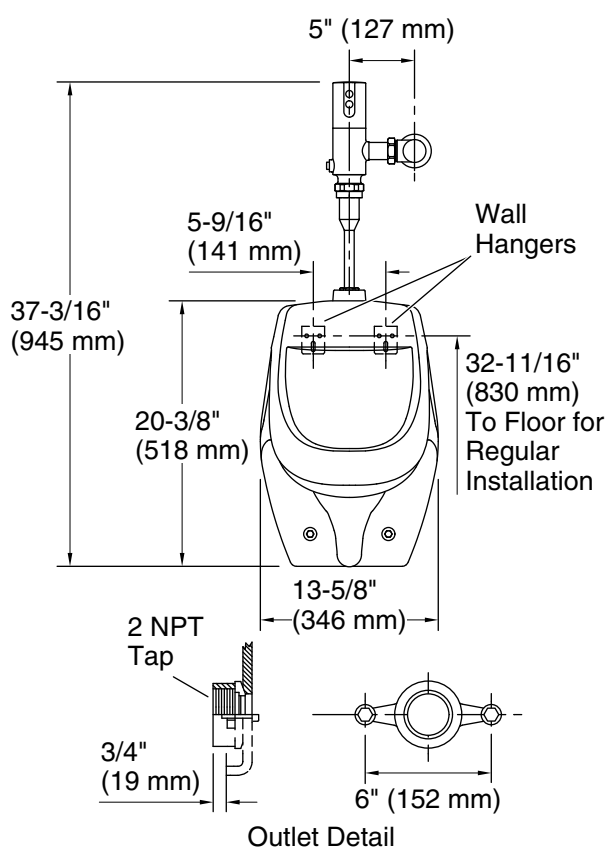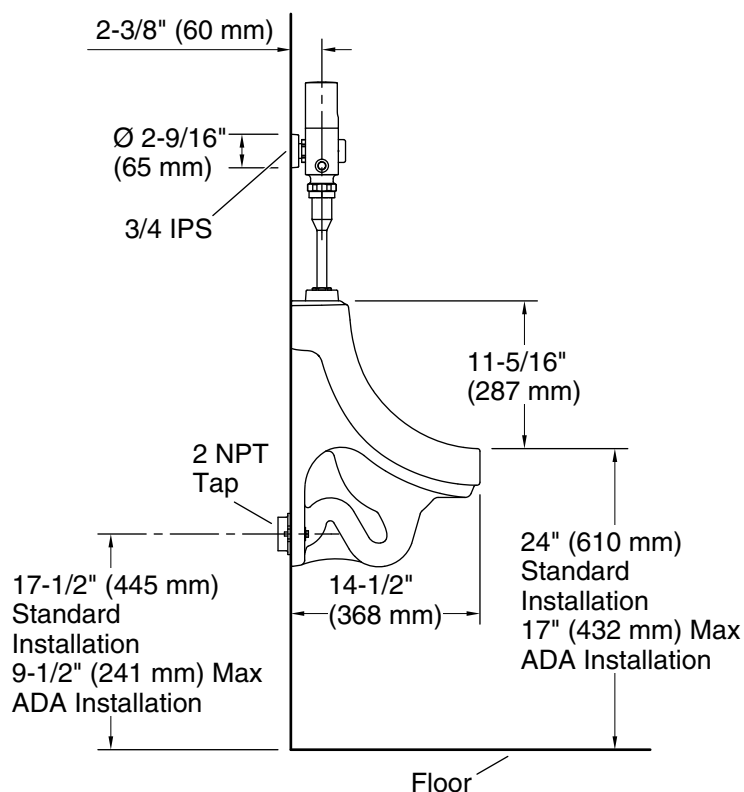

Technical Information

All product dimensions are nominal.

Flush outlet Siphon jet
technology:
Spud size: 3/4, Inlet, Top

Pressure and Supply Requirements

Fixture pressure min 25 psi (172.4 kPa)
(static):

Fixture flow rate min: 25 gpm (94.6 lpm)

Fixture pressure 80 psi (551.6 kPa)
max (static):

Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.