



# Wellcomme™ Ultra

Commercial toilet with Mach® Tripoint®  
flushometer  
**K-PR96053-T4D**

## Features

- Fixture and touchless flushometer combination is engineered for optimal performance.
- Elongated bowl offers added room and comfort.
- 2-1/8" (54 mm) fully glazed trapway.
- 10" x 7" (254 mm x 178 mm) water surface.
- 10" or 12" (254 or 305 mm) rough-in.
- 1.28 gpf (4.8 lpf).
- Flush valve activation distance is factory-set.
- No external flush volume adjustment ensures water conservation.
- 24-hour automatic sentinel flush keeps trapway fresh.
- Mechanical override enables flushometer to be used manually even during a power outage.
- Chloramine and chlorine resistance on all rubber components exposed to waterway.
- Locking stop cap provides protection against vandalism.
- Powered by 1.5V AA lithium batteries.
- For this combination, order K-96053 bowl and K-10TD00N10 flushometer.

## Material

- Vitreous china bowl.
- Brass flush valve with durable polished brass finish.

## Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation.
- Designed to outperform competitors in bowl cleanliness and plug resistance.

## Installation

- Seat sold separately.

## Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.



## Codes/Standards


ASME A112.18.1/CSA B125.1  
ASME A112.19.2/CSA B45.1  
ASSE 1037/ASME A112.1037/CSA B125.37  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

# KOHLER®

## Wellcomme™ Ultra Commercial toilet with Mach® Tripoint® flushometer K-PR96053-T4D

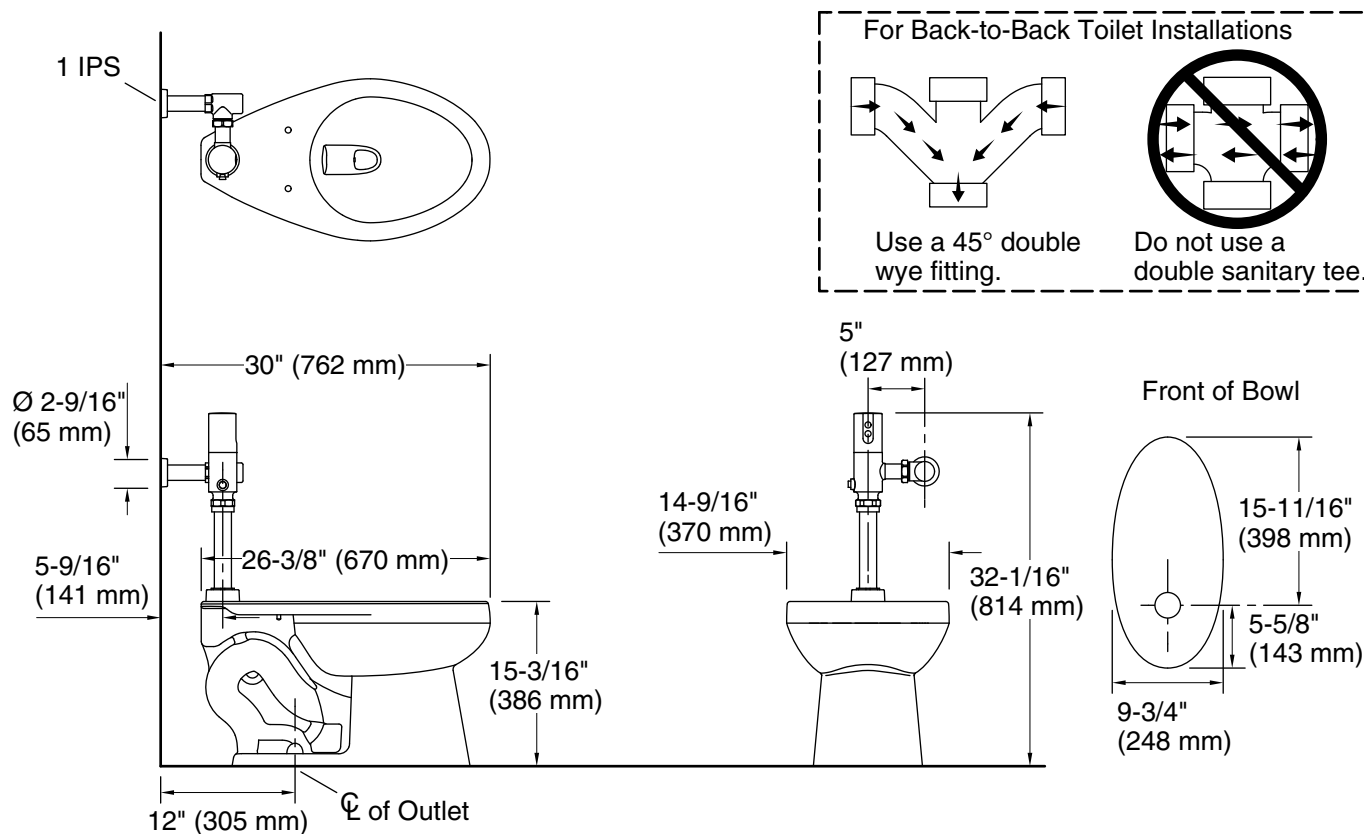

### Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Flushometer valve siphon
Spud size:	1 1/2, Inlet, Top
Trap passageway:	2-1/8" (54 mm)
Rim to water surface:	6" (152 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

### Fixture Supply Requirements

Min static pressure:	35 psi (241.3 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	25 psi (172.4 kPa)
Min flow rate:	25 gpm (94.6 lpm)

### Notes

Install this product according to the installation instructions.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

5-9-2022 19:56 - US/CA/MX

THE BOLD LOOK  
OF **KOHLER**®