AprilAire
Radon

SUBMITTAL SHEET

ARN15F

Mitigation Fan

Project: _____ Dealer: _____

Architect: _____ Engineer: _____

Contractor: _____ Location: _____

Suppliers: _____ Date: _____



SPECIFICATIONS

Typical CFM vs. Static Pressure WC

166 CFM	0.0" w.c.
126 CFM	0.5" w.c.
82 CFM	1.0" w.c.
41 CFM	1.5" w.c.
3 CFM	2.0" w.c.
--	3.0" w.c.

Recommended Maximum Operating Pressure "WC	1.7
Fan Duct Diameter	4"
Watts	41 - 72
Application	Slab size < 1500 sq. ft.
RRNC 2.0 Radon Fan Type	RF1, RF2
Dimensions DxH	9.7" x 8.5"
Color	White
Fan Duct Diameter	4"


OPERATION

The ARN15F, located outside of the conditioned envelope of the home, is connected to a system of PVC piping on either end of the fan. The fan pulls radon rich air from the substrate under the home and exhausts it into the outdoor air.

APPLICATION

The ARN15F is ideal for most sub-slab radon mitigation systems with a basement or slab size up to 1500 square feet. Other factors play into fan selection, such as soil/grade type, and home construction.

ARN15F

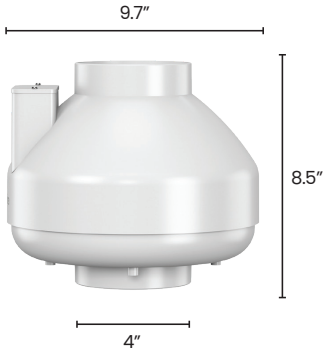

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale. Ensure submittals are current. Research Products reserves the rights to make product change without notifications or obligations.

ETL Listed

Intertek

with U.S. and imported parts.

MADE IN USA

5 YEAR WARRANTY

All AprilAire Radon Mitigation Fans are covered by our 5-year, hassle-free warranty.

Form No. Sub-ARN15F • 310790 • 02.22
©2022 AprilAire | aprilairepartners.com | 800.334.6011
AprilAire reserves the right to change specifications without notice.

AprilAire