


New PeakFlow® Series Anti-scaling Systems

Peak performance for
residential and
commercial
applications

PeakFlow® S
Standard



PeakFlow® C
Commercial

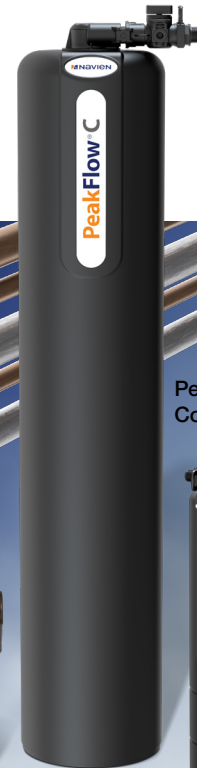

PeakFlow® A
Advanced



PeakFlow®

Anti-scaling water treatment systems for residential and commercial applications

Navien PeakFlow® chemical-free anti-scale water treatment systems are available in three models: PeakFlow S (Standard), PeakFlow A (Advanced) and PeakFlow C (Commercial). PeakFlow products prevent scale formation on plumbing surfaces in appliances and water systems, and are an effective, environmentally-friendly alternative to water softeners that are critical for water system longevity.



Specifications


Item		PeakFlow S Standard	PeakFlow A Advanced	PeakFlow C Commercial
Flow Rate	Maximum	6 GPM (23 L/m)	10 GPM (38 L/m)	20 GPM (76 L/m)
	Continuous	4 GPM (15 L/m)	6 GPM (23 L/m)	16 GPM (60 L/m)
Maximum pressure		90 PSI (6.2 bar)	90 PSI (6.2 bar)	90 PSI (6.2 bar)
Temperature	Maximum	100°F (38°C)	100°F (38°C)	100°F (38°C)
	Minimum	40°F (5°C)	40°F (5°C)	40°F (5°C)
Inlet/outlet connections		3/4" NPT	1" NPT	1-1/4" NPT
Media replacement period		2 years	3 years	3 years
Unit size (W x H)		7" x 13-1/2"	5-1/2" x 22-1/2"	10" x 54"
Note		Assembled with NSF-certified parts		




DHW piping



Tankless water heater heat exchanger

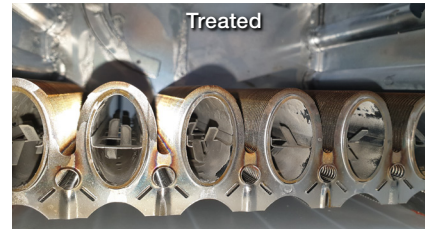

Water heater outlet

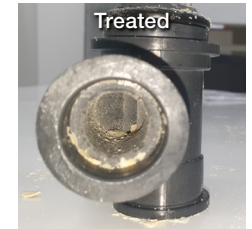

Navien PeakFlow systems have been protecting Navien tankless water heaters and combi-boilers from damaging lime/calcium deposits in their products for many years. This advanced technology is now available to protect your complete water supply system for residential and commercial applications.

