

Rite-Temp[®] 2.5 gpm shower faucet trim set K-TS27404-4

Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Antiscald protection.
- A single handle controls both on/off activation and temperature setting.
- Includes faceplate with ADA-compliant metal level handle.
- Includes single-function 2.5 gpm (9.5 lpm) showerhead.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- Includes shower arm and flange.
- Coordinates with other products in the Riff collection.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

Requires Rite-Temp® pressure-balancing valve (sold separately).

Required Products/Accessories

K-304 Series Rite-Temp® Valves

or

- K-8304 Series Rite-Temp $\mbox{\ensuremath{\mathbb{R}}}$ Valve & Cartridge Kits or
 - K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

Adapters, Rough-in and Extension Kits

10350

Range: 3-1/2" (89 mm) -4-1/4" (108 mm)

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992


KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description





KOHLER, Faucets

Rite-Temp[®] 2.5 gpm shower faucet trim set K-TS27404-4

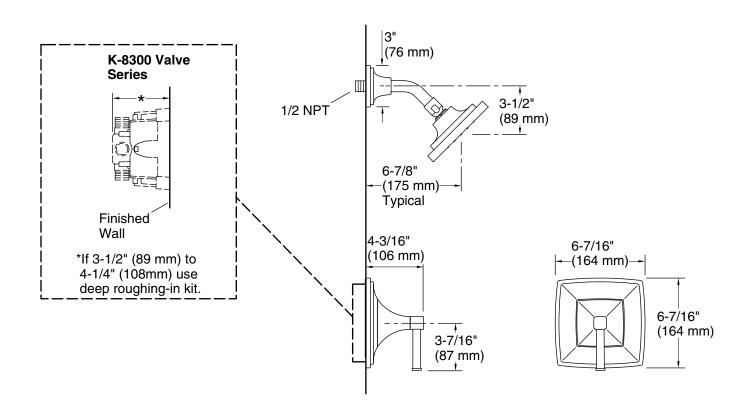

Technical Information

All product dimensions are nominal.

Drain included: No

Showerhead/Body Spray:

Rated maximum
flow:2.5 gal/min (9.5 l/min)Pressure:45 psi (3.1 bar)

Notes

Install this product according to the installation instructions.

