

- LG6-1VRVC Finish(C)
- LG6-1VRVB Finish(B)
- LG6-1VRVBG Finish(BG)
- LG6-1VRVD Finish(D)

## Specifications

- All Metal Construction
- Trim Only, Valve Not Included

### Features

- 8 GPM @ 45 PSI Flow Rate
- 1.8 GPM Flow Rate (Handheld)
- 60" Metal Hose
- All Metal Construction
- Ceramic Disc Valve
- Easy to Clean Nozzles
- Ribbon Water Flow
- Optional Concrete Mounting Bracket 931-145 Available (Sold Separately)
- Requires OX6-27OR Valve (Sold Separately)
- Decorative Lever Available, Order HHL-LG61VRVL\* (Sold Separately)
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- ADA Compliant - ANSI A117.1 (Lever Handles Only)
- CEC Certified/CALGreen compliant
- EPA WaterSense Certification 1.8 gpm, 6.8L/Min



## Dimensions

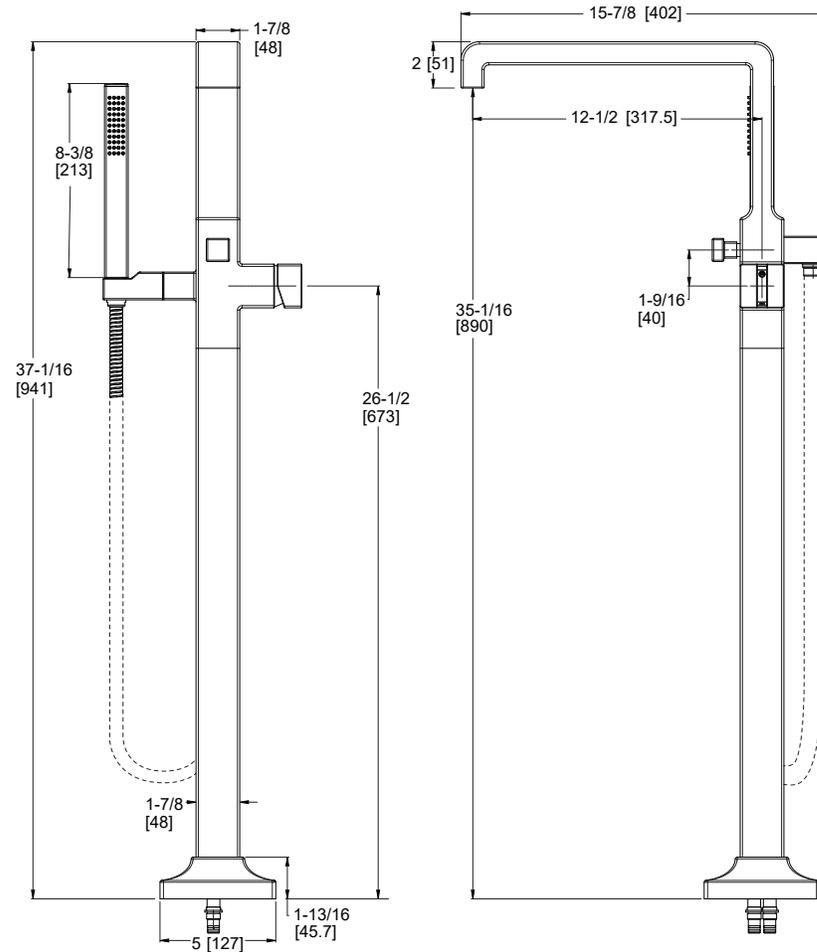

Ø3-3/8Max. Deck Hole Openings