


- LG49-VRV1B Finish(B)
- LG49-VRV1BG Finish(BG)
- LG49-VRVIC Finish(C)
- LG49-VRVID Finish(D)

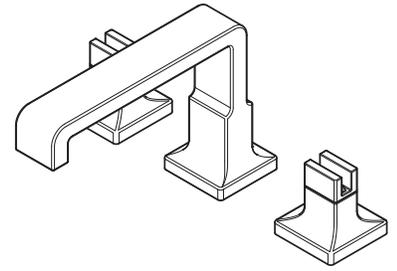

## Specifications

### Features

- 1.2 GPM Flow Rate
- Adjustable Install
- Concealed Screws
- Fixed Hubs
- Ribbon Water Flow
- Metal Push & Seal™ Drain
- Mounting Hardware Included

- Supply Lines Not Included
- Optional Handles Available:  
For L Handles Order HHL-VRVL\*  
For T Handles Order HHL-VRVT\*  
For Cross Handles Order HHL-VRVX\*
- UltraSeal™ Ceramic Disc Valve
- Pforever Warranty®




### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF 61/9 AnnexG Certified
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

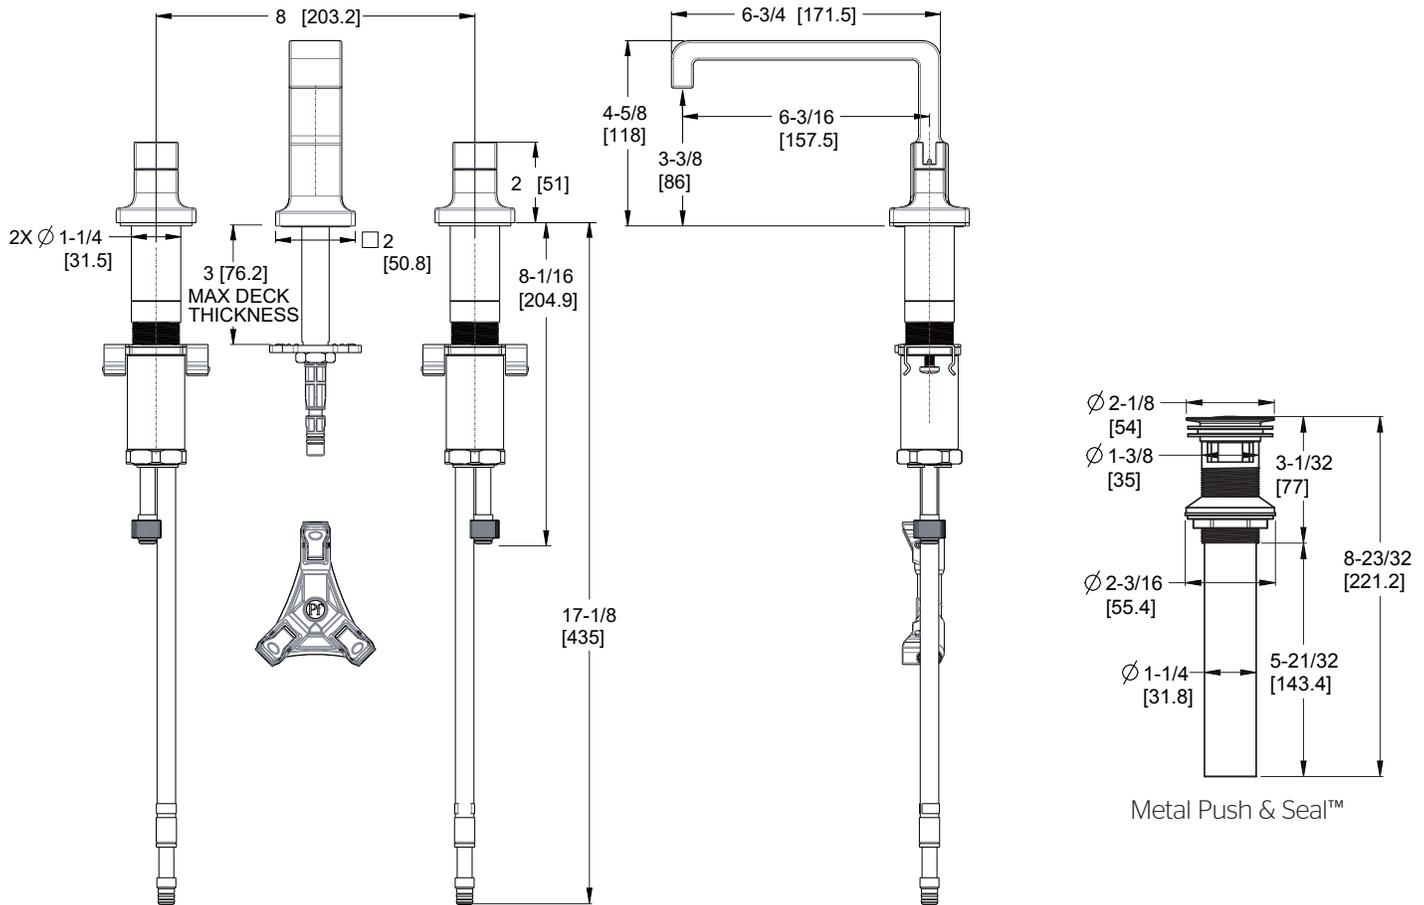

$\varnothing$ 1-1/4 Min to  $\varnothing$ 1-1/2 Max. Deck Hole Openings