

### Specifications

#### Features

- 1.8 GPM Flow Rate
- React™ Touch-Free Technology
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer (Spray, Stream, and HydroBlade™)
- MagnePfit™ Sprayhead Docking
- Auto-Align™ Sprayhead Docking
- 360° High Arc Rotating Swivel Spout
- Mounting Hardware Included
- Spot Defense™ Finish Resists Spots and Fingerprints
- Forward Handle Operation
- 17" Extended Pull-Down Length
- Braided Nylon HDPE Hose
- Battery Pack Included (4xAA Batteries)
- PERT Supply Lines with 3/8" Connection
- TopPfit™ Install Tool
- Optional AC Adapter Available (Order 952-008 Separately)
- SmartStop
- Low Battery Indicator
- Manual Override
- Temperature Adjust
- SoloTilt™ One-Handed Soap Pump
- Pfast Connect™
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


#### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- Certified to NSF 61/9 AnnexG
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)




### Dimensions

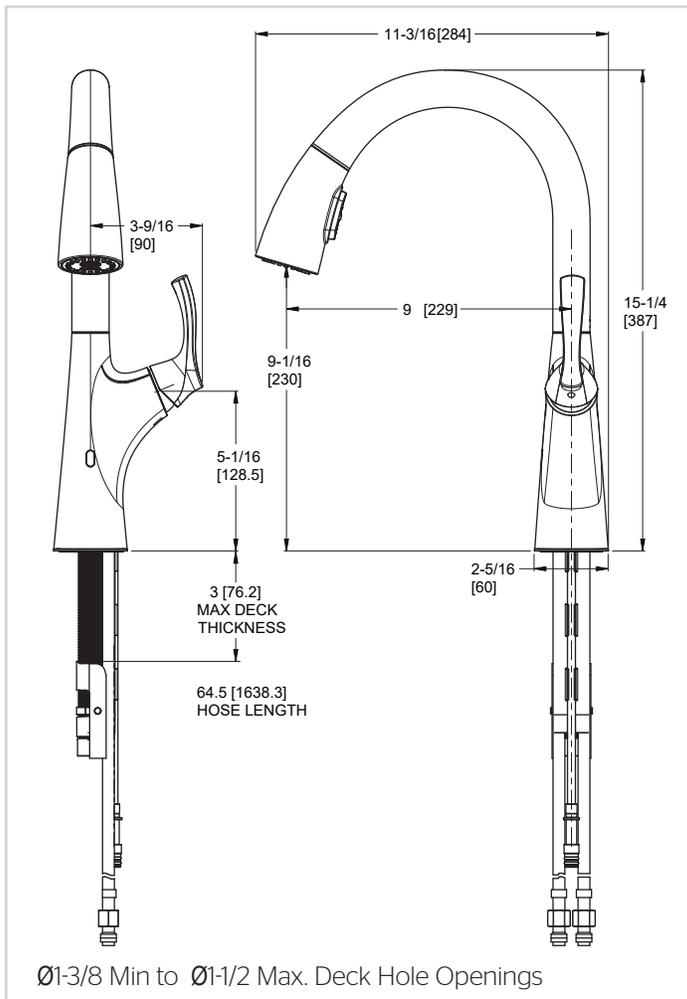

#### Optional Included Deckplate




#### Control Box

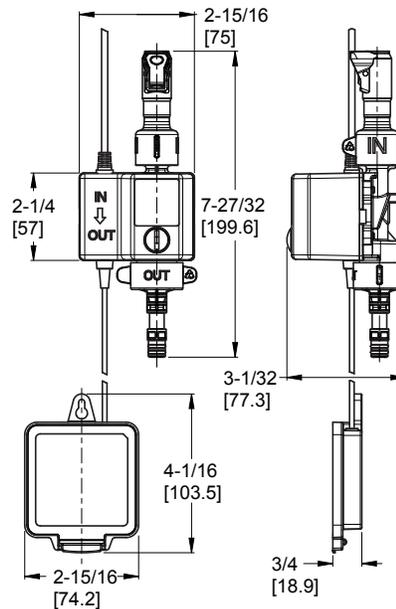

#### Battery Box

#### Top Filling Soap Dispenser

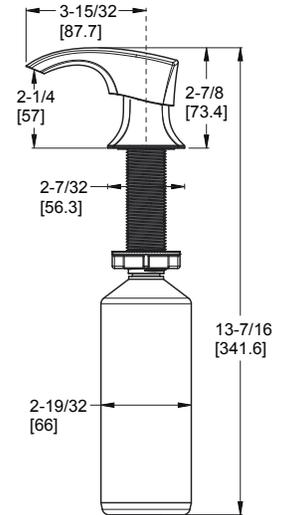

#### 36 Inch Supply Lines with 3/8 Female Compression Brass Connections

