

# PFMVMS387 MIXING VALVE




## Product Features

- 3/8" compression fittings
- Check valves included
- Installs easily between the stop valves and faucet
- Low-lead brass

## Codes and Certifications




- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/IAPMO listed
- NSF/ANSI/CAN 61: Q ≤1

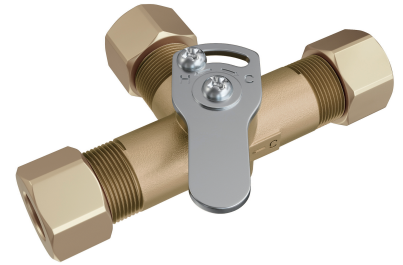

**PFMVMS387**

Flow Capacities						
Water Pressure	20 psi (1.4 bar)	30 psi (2.1 bar)	40 psi (2.8 bar)	50 psi (3.4 bar)	60 psi (4.2 bar)	70 psi (4.9 bar)
Flow Rate	3.8 gpm (14.2 L/min)	4.7 gpm (17.8 L/min)	5.5 gpm (20.8 L/min)	6.1 gpm (22.9 L/min)	6.4 gpm (24.1 L/min)	6.8 gpm (25.6 L/min)

Maximum Operating Pressure: 125 psi (8.6 bar)

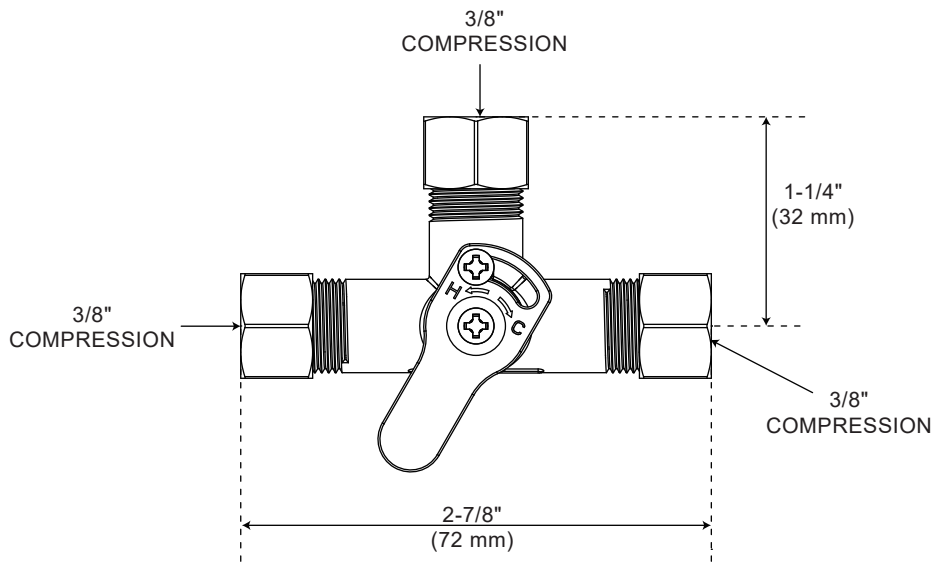

**CAUTION!** This is a water mixing valve only, the mechanical is to mix hot and cold water only! It does NOT provide automatic control of water temperature. Hot water in excess of 110°F (43°C) is dangerous and CAN CAUSE SCALDING.

For detailed warranty information, visit [ferguson.com/proflo-faucet-warranty](https://ferguson.com/proflo-faucet-warranty).