

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

PVC COMPRESSION SWING CHECK VALVE

S-614

Full-pattern bodies and compression nuts are constructed of corrosion-proof, virgin PVC resin

Compression-type end connections are designed to fit onto Schedule 40 or 80 PVC pipe or steel pipe

Cracking pressure: 1/2-pound positive pressure

Full-flow waterways are ideal for wastewater, grey water or sewage installations

1-1/4" – 1-1/2" S-614 includes two sets of compression gaskets permitting installation onto either 1-1/4" or 1-1/2" pipe

Can be installed in either vertical (upward flow only) or horizontal (flapper hanging) positions

Weighted flapper assures quick, positive closure in low- or high-backflow conditions

Not suitable for compressed air or steam service

Available sizes: 1-1/4" to 2"


Working Pressure, Non-Shock (PSI)

Cold working pressure (CWP): 150 @ 73° F

Saturated steam (WSP): Not suitable for steam service

Maximum service temperature: 140° F

- PVC resin conforms to ASTM Specification D1784-08
- Manufactured in an ISO accredited facility

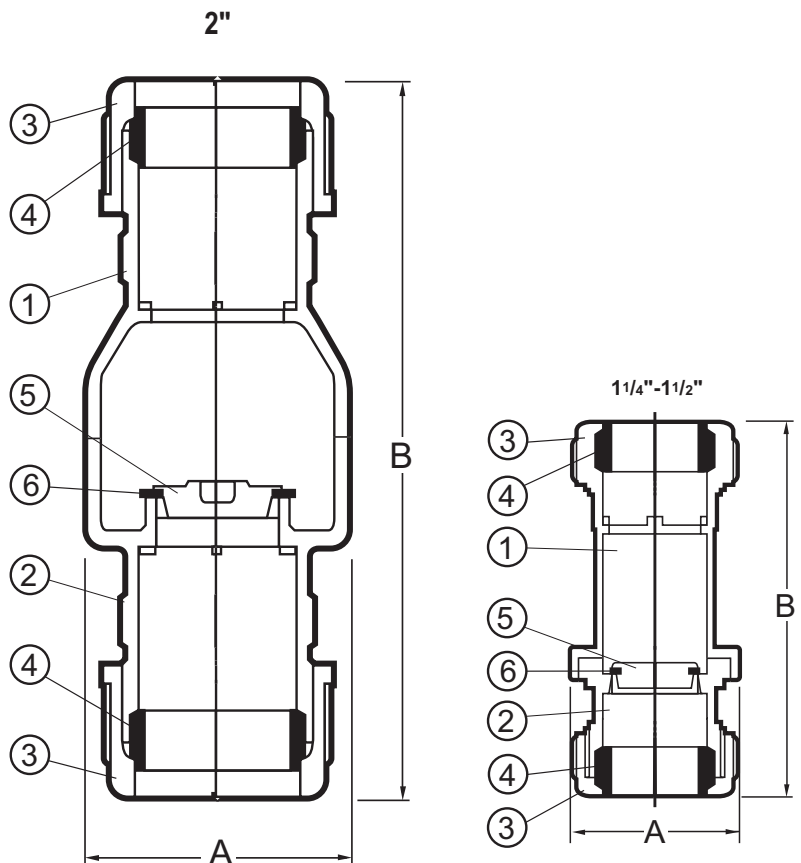

MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Upper body segment	PVC resin	ASTM D1784-08
2 Lower body segment	PVC resin	ASTM D1784-08
3 Compression nuts (2)	PVC resin	ASTM D1784-08
4 Compression gaskets (2)	EPDM	Commercial grade
5 Flapper weight	PVC resin	ASTM D1784-08
6 Flapper	EPDM	Commercial grade

DIMENSIONS

Size	A	B
1-1/4" / 1-1/2"	2.96	5.50
2"	4.20	9.62

**Pictured
S-614**
Cut-aways