


4425
AC120V

Catalog #:		Type
Project:		Date
Prepared by:		

4" LED Cylinder Down Light

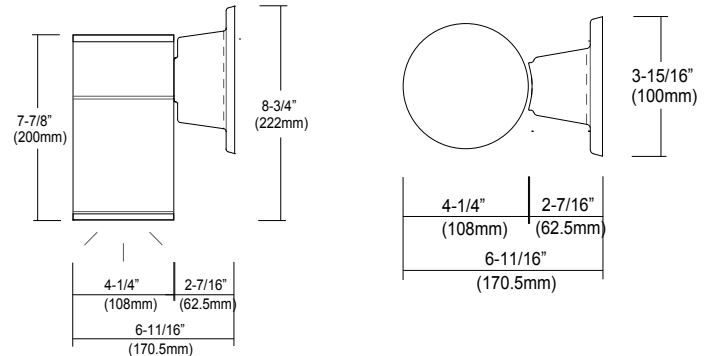

LED Cylinder Down Light

DESCRIPTION

The Outdoor LED Cylinder Family features wet location rated wall mount style cylinders with down light and up & down light options. Choose from energy efficient 15W, 20W, or 30W AC modules, with finishes available in white, black, brushed nickel, or oil-rubbed bronze. Features Triac dimming down to 5%, using most standard dimmers. Utilizes AC circuit on board technology for cooler operating temperature and extended lifetime.

DESIGN FEATURES

Construction

- Aluminum die-cast with powder coat finish

Electrical

- 120V Direct AC operation with DOB
- Triac dimming down to 5%
- Various wattages of modules available
- Cooler operating temperature without driver
- Stable driving current prevents inrush damage to circuit switches and modules
- Available in 80CRI, 3000K & 4000K

Installation

- Easy surface mounting for simple installation using anchors and screws (*not included*).

Lens

- Clear acrylic lens protects LEDs while allowing for optimum lumen output
- 43° Beam angle for 15W & 20W
- 50° Beam angle for 30W

Finish

- White, black, brushed nickel, or oil-rubbed bronze

Certifications

- cCSA-us for wet location



4425

4" LED Cylinder Down Light

Specification & Ordering

Model #	Dimensions (H x W)	Lumens	Watts	Beam Angle
4425-15	8 3/4" x 4 1/4"	1,192 Lm	15W	43° distribution
4425-20		1,418 Lm	20W	43° distribution
4425-30		2,118 Lm	30W	50° distribution

ORDERING

Example: 4425BK-30-3K

Model #	Finish	Watts	CCT
4425			
4425	WH : White BK : Black BN : Brushed Nickel OB : Oil-rubbed Bronze	-15 : 15W -20 : 20W -30 : 30W	-3K : 3000 K -4K : 4000 K