

F1960 Poly PEX Plug

Job Name _____
 Location _____
 Engineer _____
 Contractor _____
 Tag _____ PO# _____

Specifications

Manufactured to the highest industry standards, Jones Stephens' F1960 cold expansion fittings provide precise, secure, and leak-free connections. Made with strong polymer material, F1960 cold expansion fittings are corrosion and chlorine/chemical resistant – making them a great fit for aggressive water environments. Approved for use with PEX-A piping. Can be used with F1960 PEX rings.

Applications


Jones Stephens' F1960 Poly PEX Plugs are approved for use with commercial and residential non-potable water applications.

Materials

Polymer construction. Manufactured of premium-grade resin with non-mixed blends.

Certifications/Listings/Approvals

ASTM F1960-2018a
 ASTM F877-2020
 NSF/ANSI/CAN 61-2022
 NSF/ANSI 14-2016a
 NSF/ANSI/CAN 372-2022
 CSA B137.5-2020

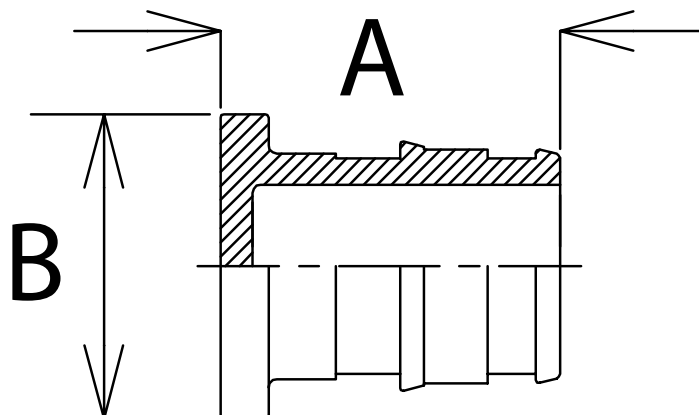

	ID	OD
F1960 Specified Dimensions	in (mm)	in (mm)
1/2" End Connection	.40(10.20)	.61(15.59)
3/4" End Connection	.61(15.60)	.87(22.10)
1" End Connection	.82(20.80)	1.11(28.10)
1-1/4" End Connection	.97(24.64)	1.36(35.54)
1-1/2" End Connection	1.08(27.43)	1.49(37.85)
2" End Connection	1.48(37.59)	2.08(52.82)

PRODUCT OFFERING ON PAGE 2

Dimensions and Product Offering

PART NO.	SIZE	A - IN (MM)	A TOLERANCE ±IN(MM)	B - IN (MM)	B TOLERANCE ±IN(MM)	WEIGHT - LBS (G)	WEIGHT TOLERANCE ±LBS (G)
F76768	0.50"	0.83 (21.18)	0.01 (0.36)	0.85 (21.71)	0.01 (0.27)	0.02 (6.80)	0.01 (2.27)
F76769	0.75"	1.07 (27.30)	0.005 (0.13)	1.16 (29.58)	0.07 (1.79)	0.02 (6.80)	0.01 (2.27)
F76771	1.00"	1.31 (33.21)	0.01 (0.21)	1.39 (35.42)	0.06 (1.63)	0.03 (11.34)	0.01 (2.27)
F76068	1.25"	1.61 (41.00)	0.01 (0.25)	1.69 (43.00)	0.01 (0.25)	0.05 (21.31)	0.01 (2.27)
F76069	1.50"	1.87 (47.60)	0.01 (0.25)	1.97 (50.00)	0.01 (0.25)	0.07 (30.35)	0.01 (2.27)
F76070	2.00"	2.35 (59.80)	0.01 (0.25)	2.64 (67.00)	0.01 (0.25)	0.16 (74.82)	0.01 (2.27)